


# 屋外照明器具特性




品名	AF-2360		
光源	EFD15EL/13-Z		
光束	810 Lm	灯数	1 灯



配光曲線図

cd/1000lm

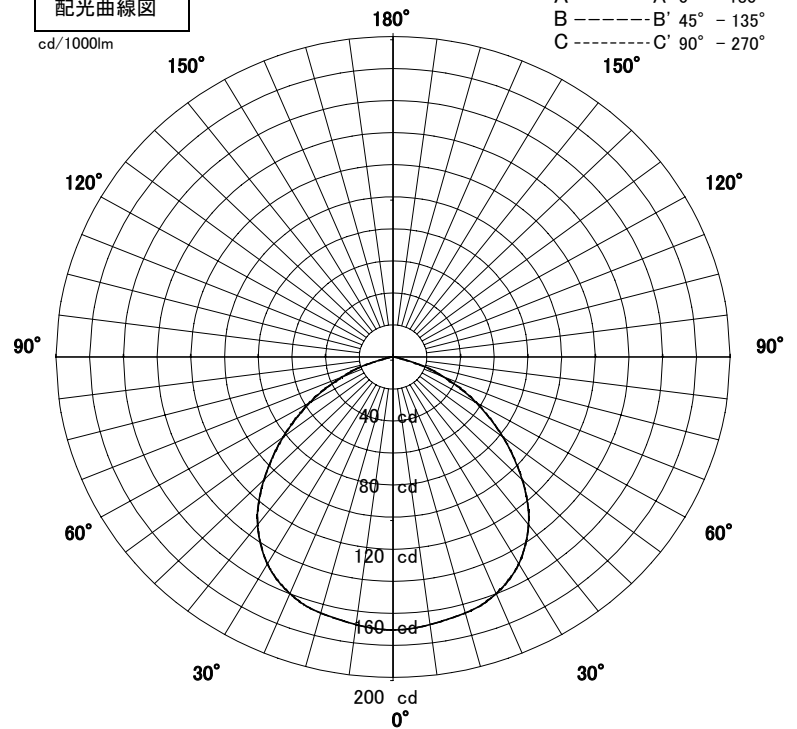


1/2照度角

直射水平面照度

単位:Lx

器具効率	42.9	%
上方効率	0.0	%
下方効率	42.9	%
保守率	良	0.74
	中	0.7
	否	0.66
1/2照度角		
A-A'	65.5	H
C-C'	65.5	H
最大取付間隔		
A-A'	1.29	H
C-C'	1.29	H

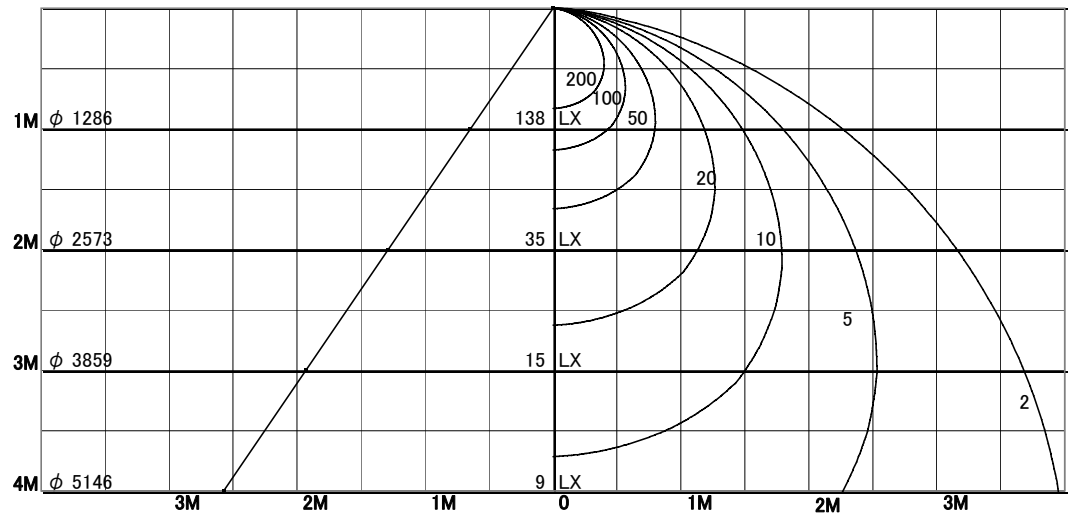

照明率表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁	10%																0%
床	10%																0%
0.60	26	21	18	16	25	21	18	16	25	20	18	16	24	20	18	16	15
0.80	30	25	22	20	29	25	22	20	28	24	22	20	27	24	22	20	19
1.00	33	29	26	23	32	28	25	23	31	28	25	23	30	27	25	23	22
1.25	35	32	29	27	35	31	29	27	34	31	28	26	32	30	28	26	25
1.50	37	34	31	29	37	33	31	29	35	33	31	29	34	32	30	29	28
2.00	40	37	35	33	39	37	35	33	38	36	34	33	37	35	33	32	31
2.50	41	39	37	36	41	39	37	35	39	38	36	35	38	37	36	34	33
3.00	42	40	39	37	42	40	38	37	40	39	38	37	39	38	37	36	35
4.00	43	42	41	39	43	41	40	39	42	40	39	39	41	40	39	38	37
5.00	44	43	42	41	43	42	41	40	42	41	41	40	41	40	40	39	38
7.00	45	44	43	42	44	43	43	42	43	42	42	41	42	42	41	41	39
10.00	45	45	44	43	45	44	44	43	44	43	43	42	43	42	42	41	40