


屋内照明器具特性




品名	DE-2313		
光源	KR100/110V45WR50		
光束	381 Lm	灯数	1 灯



配光曲線図

cd/1000lm

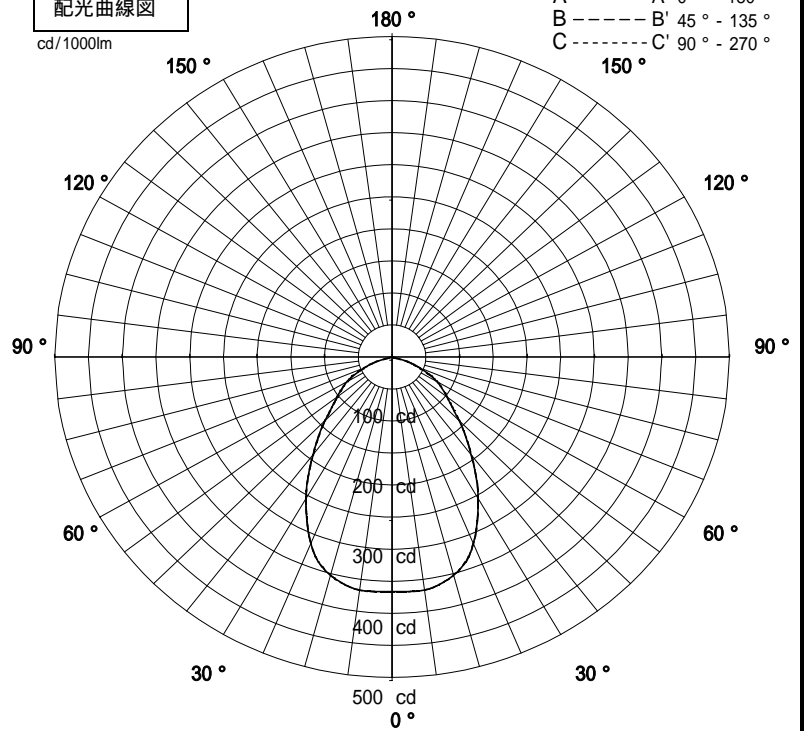


1/2照度角

直射水平面照度

単位:Lx

器具効率	67.2	%
上方効率	0.0	%
下方効率	67.2	%
保守率	良	0.84
	中	0.79
	否	0.7
1/2照度角		
A - A'	56.5	H
C - C'	56.5	H
最大取付間隔		
A - A'	1.07	H
C - C'	1.07	H

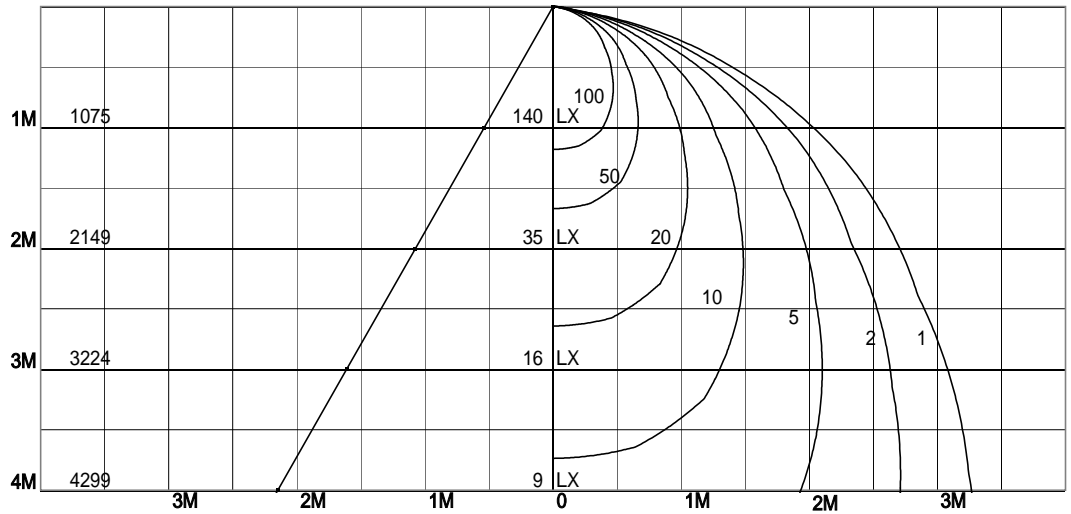

照明率表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁	10%																
床	10%																
0.60	42	36	31	28	42	35	31	28	40	35	31	28	39	34	31	28	27
0.80	48	42	37	34	47	41	37	34	46	40	37	34	44	40	36	34	32
1.00	52	46	42	39	51	46	42	39	50	45	41	39	48	44	41	38	37
1.25	56	51	47	44	55	50	46	43	53	49	46	43	51	48	45	43	41
1.50	58	54	50	47	57	53	50	47	56	52	49	47	54	51	48	46	45
2.00	62	58	55	53	61	57	55	52	59	56	54	52	58	55	53	51	50
2.50	64	61	58	56	63	60	58	56	61	59	57	55	60	58	56	55	53
3.00	65	63	61	59	64	62	60	58	63	61	59	58	61	60	58	57	55
4.00	67	65	63	62	66	64	63	61	64	63	62	60	63	62	61	60	58
5.00	68	66	65	64	67	65	64	63	65	64	63	62	64	63	62	61	60
7.00	69	68	67	66	68	67	66	65	66	66	65	64	65	64	64	63	61
10.00	69	69	68	67	69	68	67	67	67	67	66	66	66	65	65	64	63

(100V点灯時) 110Vまたは100/110V定格ランプの照度データは100V点灯時の値です。