


屋内照明器具特性




品名	DE-2412		
光源	KR100V54WW		
光束	687 Lm	灯数	1 灯



配光曲線図

cd/1000lm

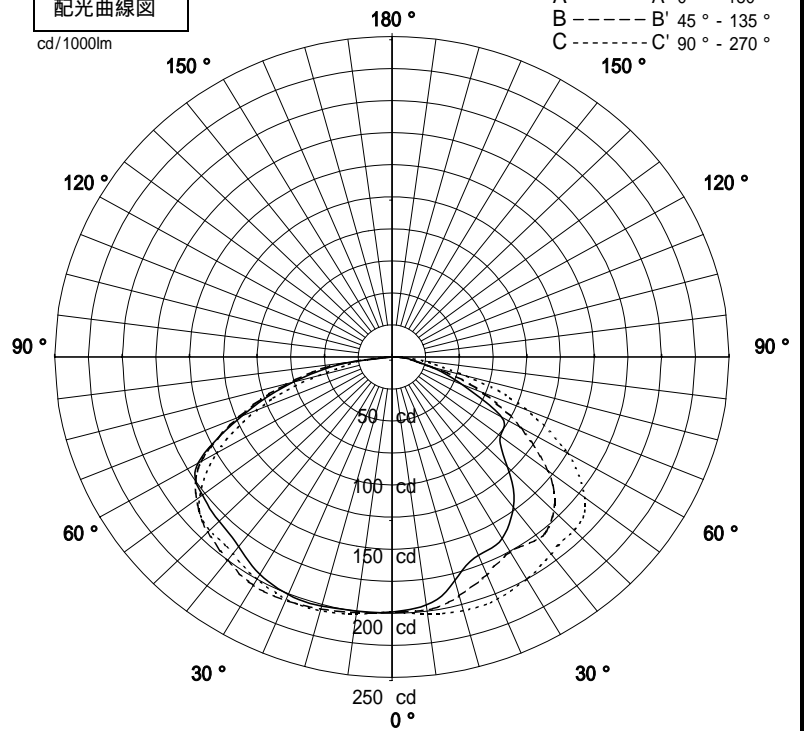


1/2照度角

直射水平面照度

単位:Lx

器具効率	75.0	%
上方効率	0.2	%
下方効率	74.8	%
保守率	良	0.84
	中	0.79
	否	0.7
1/2照度角		
A - A'	67.5	H
C - C'	73.5	H
最大取付間隔		
A - A'	1.34	H
C - C'	1.49	H

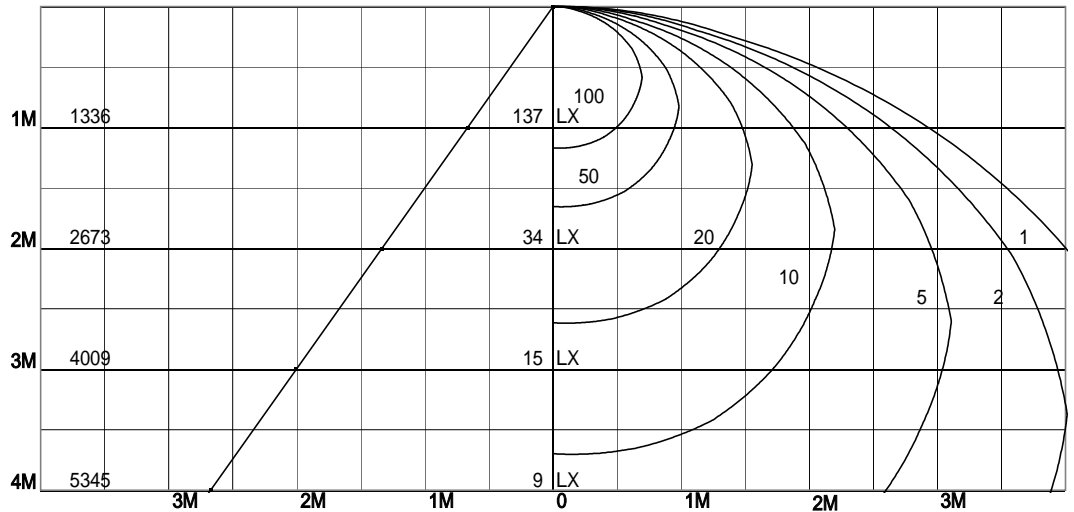

照明率表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁	10%																
床	10%																
0.60	41	31	25	21	40	31	25	20	38	30	24	20	36	29	24	20	19
0.80	48	38	32	27	46	38	32	27	44	37	31	27	42	36	31	27	25
1.00	53	44	38	33	52	43	38	33	49	42	37	33	47	41	36	33	31
1.25	58	50	44	39	56	49	43	39	54	48	43	39	52	46	42	38	36
1.50	61	54	48	44	60	53	48	44	57	52	47	43	55	50	46	43	41
2.00	66	60	55	51	65	59	55	51	62	58	54	50	60	56	53	50	48
2.50	69	64	60	56	68	63	59	56	65	61	58	55	63	60	57	54	52
3.00	71	67	63	60	70	66	62	59	68	64	61	58	65	63	60	58	56
4.00	73	70	67	64	72	69	66	64	70	68	65	63	68	66	64	62	60
5.00	75	72	70	67	74	71	69	67	72	70	68	66	70	68	66	65	63
7.00	77	75	73	71	76	74	72	70	74	72	71	69	72	70	69	68	66
10.00	78	77	75	74	77	76	74	73	75	74	73	72	73	72	71	70	68