

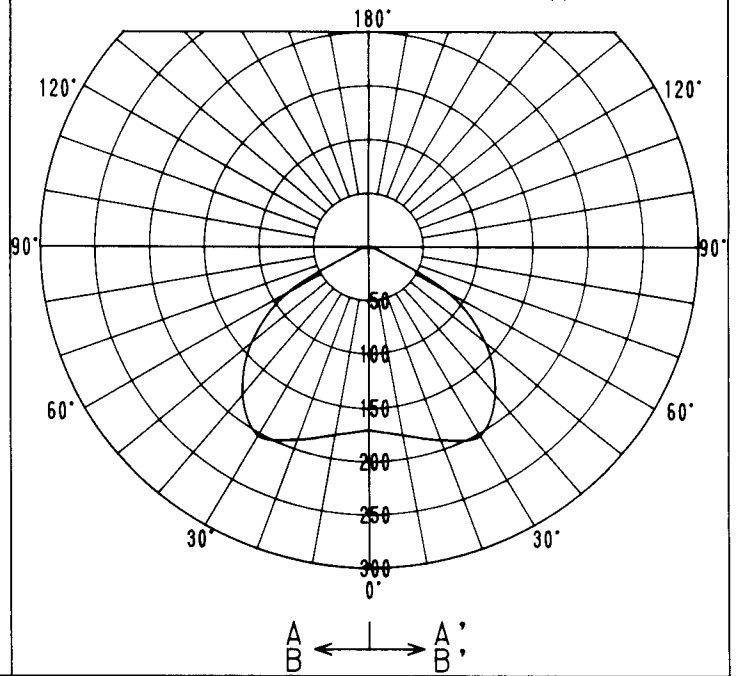


# 屋内照明器具特性




品番	DF-2462		
光源	FDL18EX-L		
光束	1070Lm	灯数	1

配光曲線  
cd/1000Lm



直射水平面照度  
単位：Lx

器具効率	56.0%
上方光束	0.0%
下方光束	56.0%
保守率	良 0.74
	中 0.70
	否 0.62

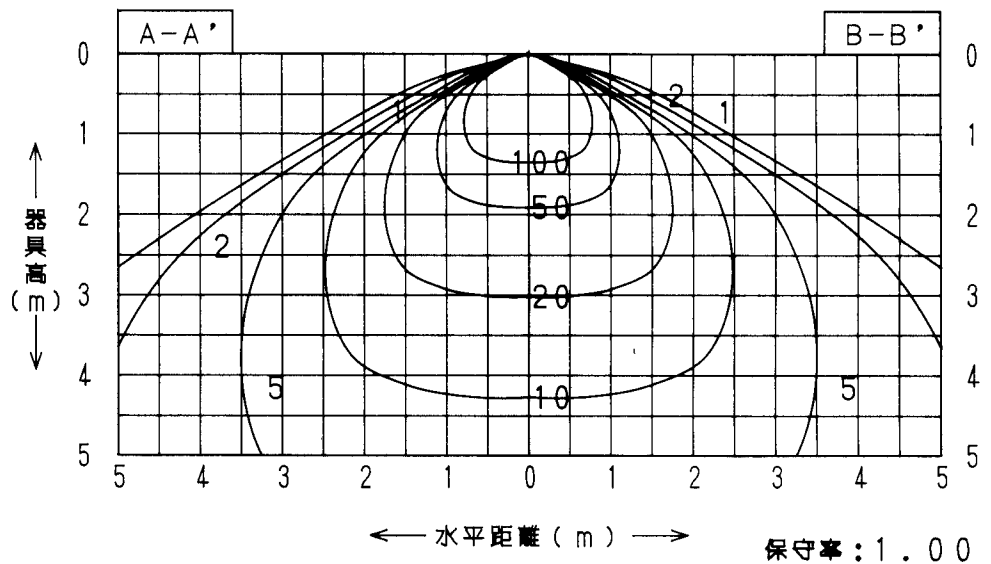

最大取付間隔	
A-A'	1.63H
B-B'	1.63H

照明率表

	80%				70%				50%				30%				0
	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	
天井面																	
壁面																	
床面																	
室指数																	
0.60	34	27	23	20	33	27	23	20	32	26	22	20	30	26	22	20	19
0.80	39	33	29	26	38	33	29	26	37	32	28	26	36	31	28	26	24
1.00	43	38	34	31	42	37	34	31	41	36	33	30	39	36	33	30	29
1.25	47	42	38	35	46	41	38	35	44	40	37	35	43	40	37	35	34
1.50	49	45	42	39	48	44	41	39	47	43	41	38	45	42	40	38	37
2.00	52	49	46	44	52	48	46	44	50	47	45	43	49	46	45	43	42
2.50	54	52	49	47	53	51	49	47	52	50	48	46	51	49	47	46	45
3.00	56	53	51	49	55	53	51	49	53	52	50	49	52	50	49	48	47
4.00	57	55	53	52	56	54	53	52	55	53	52	51	53	52	51	50	49
5.00	58	56	55	54	57	56	54	53	56	54	53	52	54	53	52	52	50
7.00	59	57	56	55	58	57	56	55	56	56	55	54	55	54	54	53	52
10.00	59	58	58	57	58	58	57	56	57	56	56	55	56	55	55	54	53