


屋内照明器具特性




品名	DF-2486		
光源	EFA22EL		
光束	1520 Lm	灯数	1 灯



配光曲線図

cd/1000lm

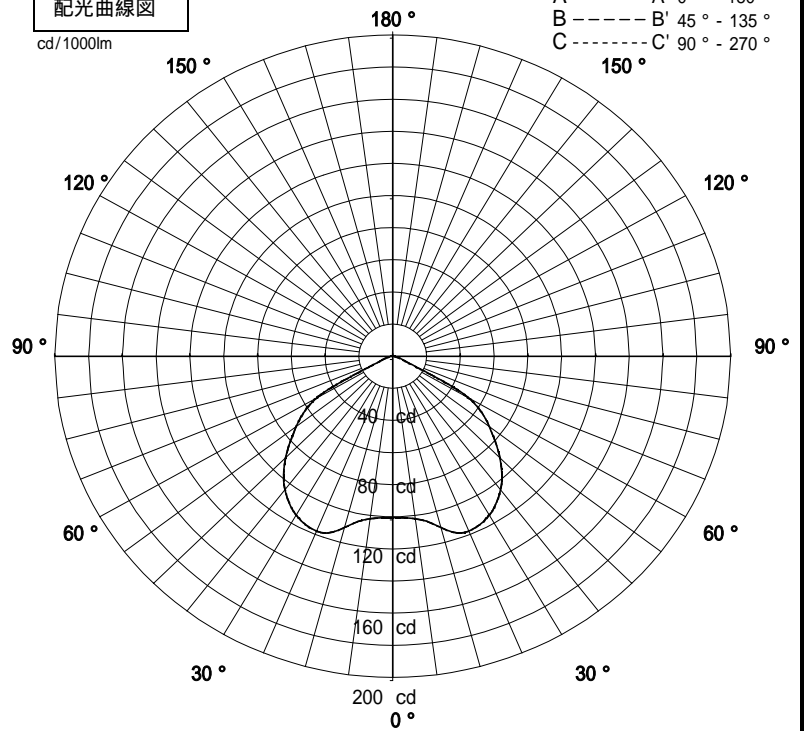


1/2照度角

直射水平面照度

単位:Lx

器具効率	32.3	%
上方効率	0.0	%
下方効率	32.3	%
保守率	良	0.74
	中	0.7
	否	0.61
1/2照度角		
A - A'	76.0	H
C - C'	76.0	H
最大取付間隔		
A - A'	1.56	H
C - C'	1.56	H

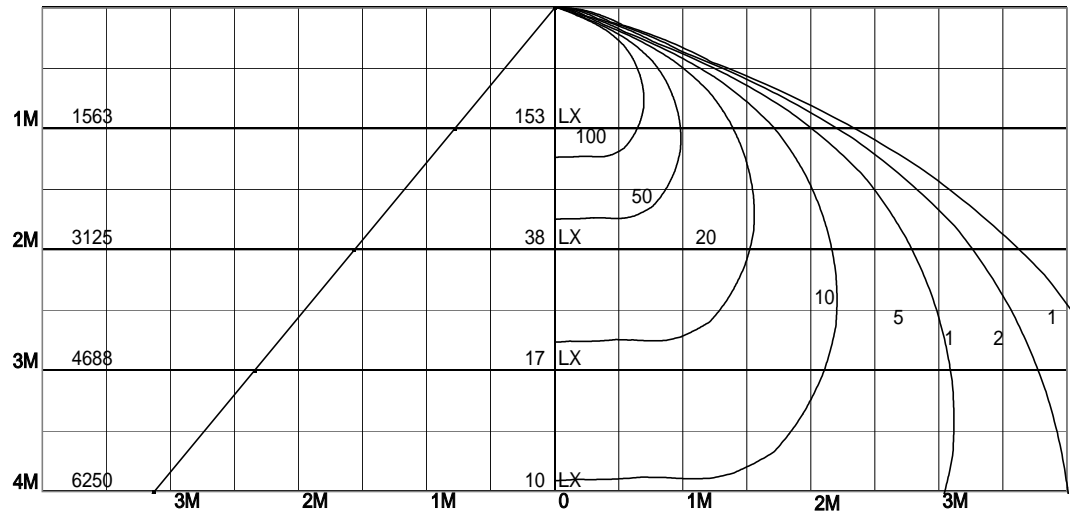

照明率表

天井	80%				70%				50%				30%				0%								
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%								
壁	10%								10%								10%								0%
床	10%																0%								
0.60	19	16	13	12	19	15	13	12	18	15	13	11	18	15	13	11	11								
0.80	23	19	17	15	22	19	17	15	21	18	16	15	20	18	16	15	14								
1.00	25	22	19	18	24	21	19	18	23	21	19	18	23	20	19	17	17								
1.25	27	24	22	20	26	24	22	20	25	23	22	20	25	23	21	20	19								
1.50	28	26	24	22	28	25	24	22	27	25	23	22	26	24	23	22	21								
2.00	30	28	27	25	30	28	26	25	29	27	26	25	28	27	26	25	24								
2.50	31	30	28	27	31	29	28	27	30	29	28	27	29	28	27	26	26								
3.00	32	31	29	28	31	30	29	28	31	30	29	28	30	29	28	28	27								
4.00	33	32	31	30	32	31	30	30	31	31	30	29	31	30	29	29	28								
5.00	33	32	32	31	33	32	31	31	32	31	31	30	31	31	30	30	29								
7.00	34	33	32	32	33	33	32	32	32	32	32	31	32	31	31	31	30								
10.00	34	34	33	33	34	33	33	32	33	32	32	32	32	32	32	31	30								