



屋内照明器具特性




| | | | |
|----|--------------|----|---|
| 品番 | DH-2509 | | |
| 光源 | CDM-T70W/830 | | |
| 光束 | 6600Lm | 灯数 | 1 |

配光曲线
cd/1000Lm

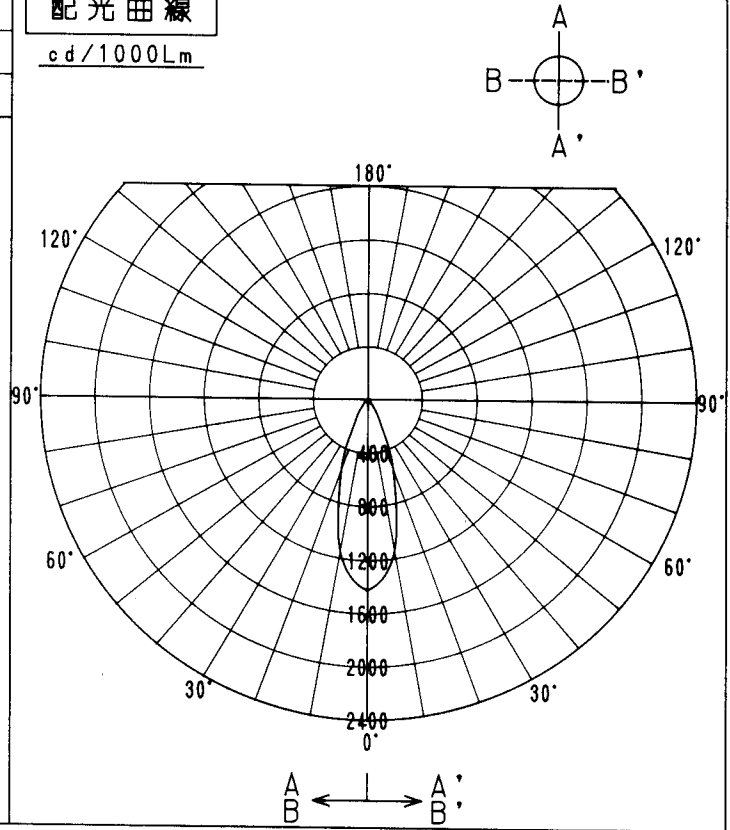

直射水平面照度
单位: Lx

| | |
|--------|--------|
| 器具效率 | 61.6% |
| 上方光束 | 0.0% |
| 下方光束 | 61.6% |
| 保守率 | 良 0.62 |
| | 中 0.58 |
| | 否 0.55 |
| 最大取付間隔 | |
| A-A' | 0.58H |
| B-B' | 0.58H |

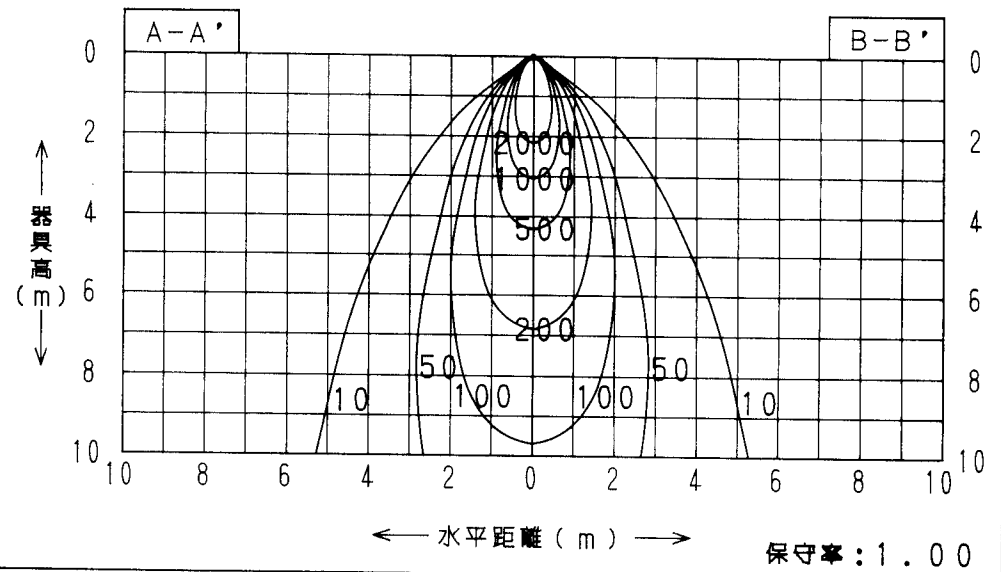

照明率表

| 天井面 | 80% | | | | 70% | | | | 50% | | | | 30% | | | | 0 | | | |
|-------|-----|----|----|----|-----|----|----|----|-----|----|----|----|-----|----|----|----|----|--|--|--|
| | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | | | | |
| 壁面 | | | | | | | | | | | | | | | | | | | | |
| 床面 | 10% | | | | 10% | | | | 10% | | | | 10% | | | | 0 | | | |
| 室指数 | | | | | | | | | | | | | | | | | | | | |
| 0.60 | 52 | 48 | 45 | 44 | 51 | 48 | 45 | 44 | 50 | 47 | 45 | 44 | 50 | 47 | 45 | 43 | 43 | | | |
| 0.80 | 55 | 51 | 49 | 47 | 54 | 51 | 49 | 47 | 53 | 50 | 48 | 47 | 52 | 50 | 48 | 47 | 46 | | | |
| 1.00 | 57 | 54 | 52 | 50 | 57 | 54 | 52 | 50 | 56 | 53 | 52 | 50 | 55 | 53 | 51 | 50 | 49 | | | |
| 1.25 | 59 | 57 | 55 | 53 | 59 | 56 | 54 | 53 | 58 | 56 | 54 | 53 | 57 | 55 | 54 | 52 | 52 | | | |
| 1.50 | 61 | 58 | 57 | 55 | 60 | 58 | 56 | 55 | 59 | 57 | 56 | 55 | 58 | 57 | 55 | 54 | 53 | | | |
| 2.00 | 63 | 61 | 60 | 58 | 62 | 61 | 59 | 58 | 61 | 60 | 59 | 58 | 60 | 59 | 58 | 57 | 56 | | | |
| 2.50 | 64 | 63 | 62 | 61 | 63 | 62 | 61 | 60 | 62 | 61 | 60 | 60 | 61 | 60 | 60 | 59 | 58 | | | |
| 3.00 | 65 | 64 | 63 | 62 | 64 | 63 | 63 | 62 | 63 | 62 | 62 | 61 | 62 | 61 | 61 | 60 | 59 | | | |
| 4.00 | 66 | 65 | 64 | 64 | 65 | 64 | 64 | 63 | 64 | 63 | 63 | 62 | 63 | 62 | 62 | 62 | 60 | | | |
| 5.00 | 66 | 66 | 65 | 65 | 65 | 65 | 65 | 64 | 64 | 64 | 64 | 63 | 63 | 63 | 63 | 62 | 61 | | | |
| 7.00 | 67 | 66 | 66 | 66 | 66 | 66 | 65 | 65 | 65 | 65 | 64 | 64 | 64 | 63 | 63 | 63 | 62 | | | |
| 10.00 | 67 | 67 | 67 | 67 | 66 | 66 | 66 | 66 | 65 | 65 | 65 | 65 | 64 | 64 | 64 | 64 | 62 | | | |