


屋内照明器具特性




品名	DH-2521		
光源	MT150SDW		
光束	10000 Lm	灯数	1 灯



配光曲線図

cd/1000lm

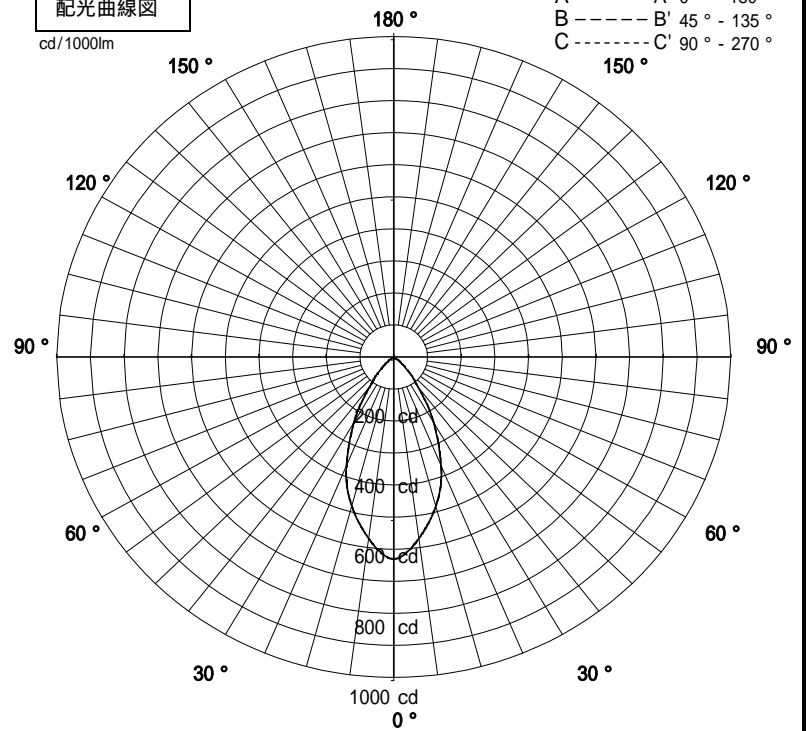


1/2照度角

直射水平面照度

単位:Lx

器具効率	49.7	%
上方効率	0.0	%
下方効率	49.7	%
保守率	良	0.65
	中	0.61
	否	0.54
1/2照度角		
A - A'	42.5	H
C - C'	42.5	H
最大取付間隔		
A - A'	0.78	H
C - C'	0.78	H

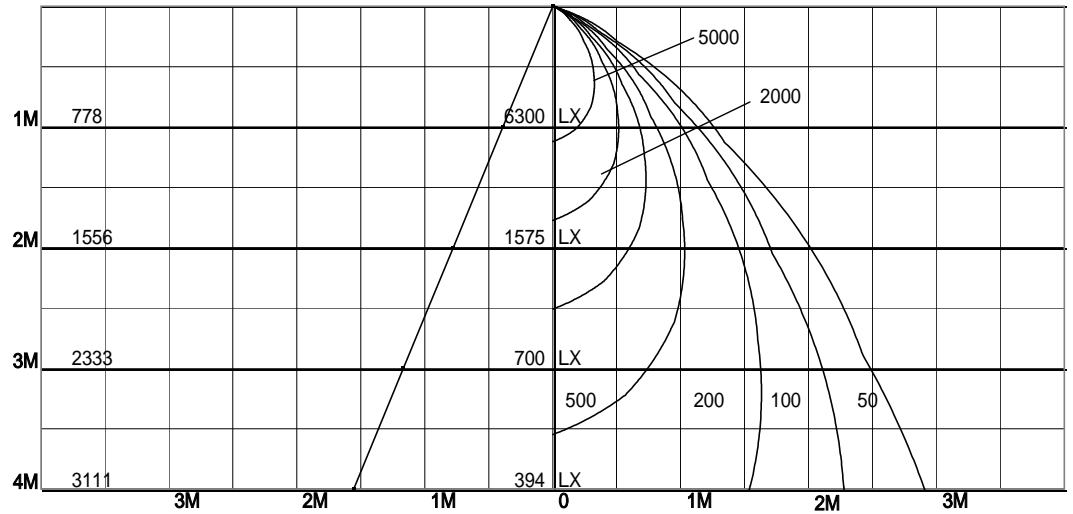

照明率表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁	10%				10%				10%				10%				0%
床	10%																0%
0.60	36	33	31	29	36	33	31	29	35	32	31	29	34	32	30	29	29
0.80	39	36	34	32	38	36	34	32	38	35	33	32	37	35	33	32	32
1.00	41	38	36	35	40	38	36	35	40	38	36	35	39	37	36	35	34
1.25	43	40	39	37	42	40	39	37	41	40	38	37	40	39	38	37	36
1.50	44	42	40	39	43	41	40	39	42	41	40	39	42	40	39	38	38
2.00	45	44	43	42	45	44	42	42	44	43	42	41	43	42	41	41	40
2.50	46	45	44	43	46	45	44	43	45	44	43	43	44	43	43	42	41
3.00	47	46	45	45	46	46	45	44	46	45	44	44	45	44	44	43	42
4.00	48	47	46	46	47	47	46	46	46	46	45	45	45	45	45	44	43
5.00	48	47	47	47	47	47	47	46	46	46	46	46	46	45	45	45	44
7.00	48	48	48	47	48	48	47	47	47	47	46	46	46	46	46	46	44
10.00	48	48	48	48	48	48	48	48	47	47	47	47	46	46	46	46	45