


# 屋内照明器具特性




品名	DE-2594		
光源	KR100/110V57W		
光束	678 Lm	灯数	1 灯



配光曲線図

cd/1000lm

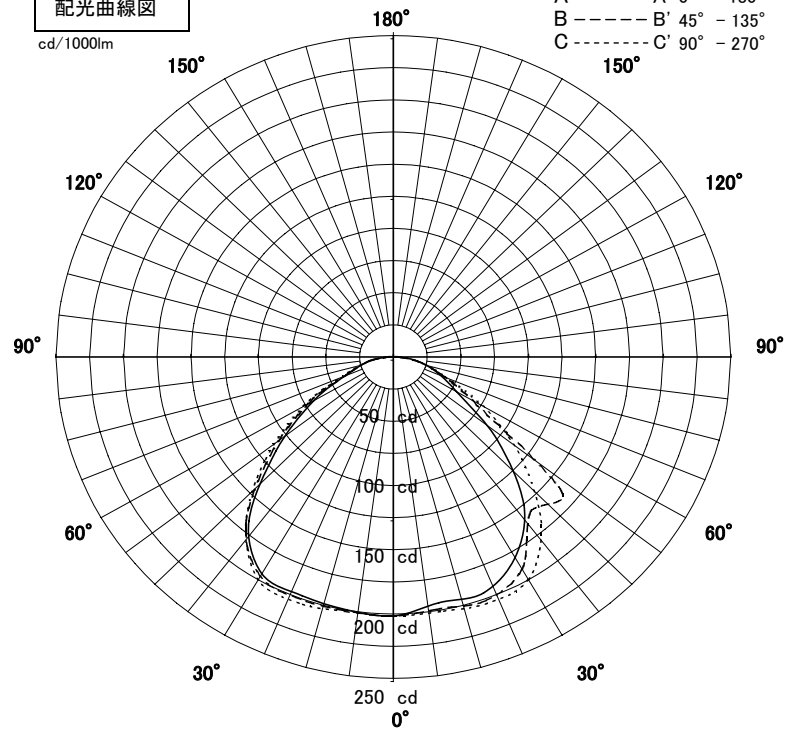


1/2照度角

直射水平面照度

単位:Lx

器具効率	57.4	%
上方効率	0.2	%
下方効率	57.2	%
保守率	良	0.84
	中	0.79
	否	0.7
1/2照度角		
A-A'	68.0	H
B-B'	70.5	H
最大取付間隔		
A-A'	1.35	H
B-B'	1.41	H

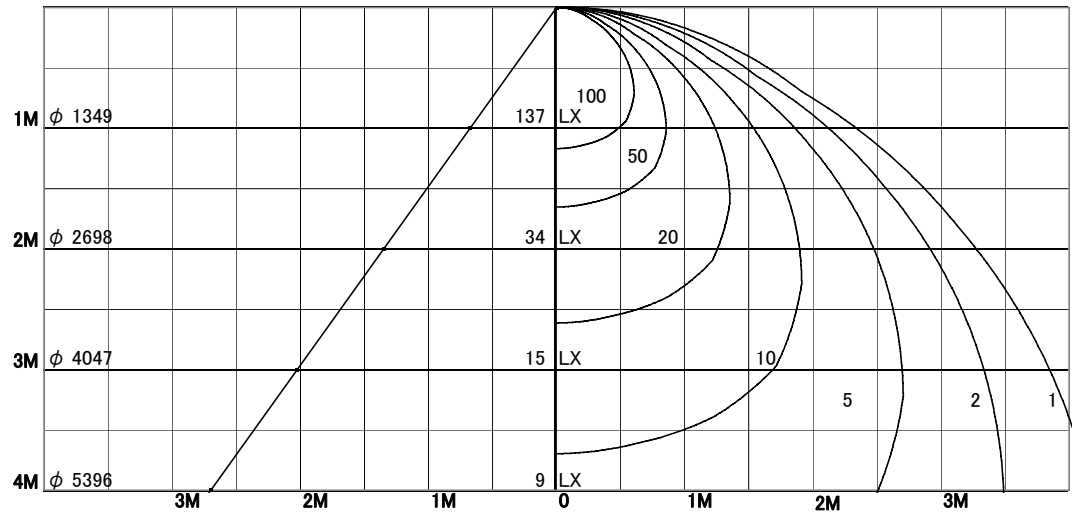

照明率表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁	10%																0%
床	10%																0%
0.60	34	27	23	20	33	27	23	20	32	26	23	20	31	26	22	20	19
0.80	39	33	29	26	39	33	29	26	37	32	28	25	36	31	28	25	24
1.00	43	37	33	30	42	37	33	30	41	36	33	30	39	35	32	30	28
1.25	47	41	38	35	46	41	37	34	44	40	37	34	43	39	36	34	33
1.50	49	44	41	38	48	44	40	38	47	43	40	37	45	42	39	37	36
2.00	52	49	46	43	52	48	45	43	50	47	44	42	48	46	44	42	41
2.50	54	51	49	46	54	51	48	46	52	49	47	45	50	48	47	45	44
3.00	56	53	51	49	55	52	50	48	53	51	49	48	52	50	48	47	46
4.00	57	55	53	51	56	54	53	51	55	53	52	50	53	52	51	50	48
5.00	58	56	55	53	57	56	54	53	56	54	53	52	54	53	52	51	50
7.00	59	58	57	55	58	57	56	55	57	56	55	54	56	55	54	53	51
10.00	60	59	58	57	59	58	57	56	58	57	56	55	56	56	55	54	53

※(100V点灯時)110Vまたは100/110V定格ランプの照度データは100V点灯時の値です。