


屋内照明器具特性




品名	DF-2630		
光源	EFD10EL/9-E17(東芝)		
光束	480 Lm	灯数	1 灯



配光曲線図

cd/1000lm

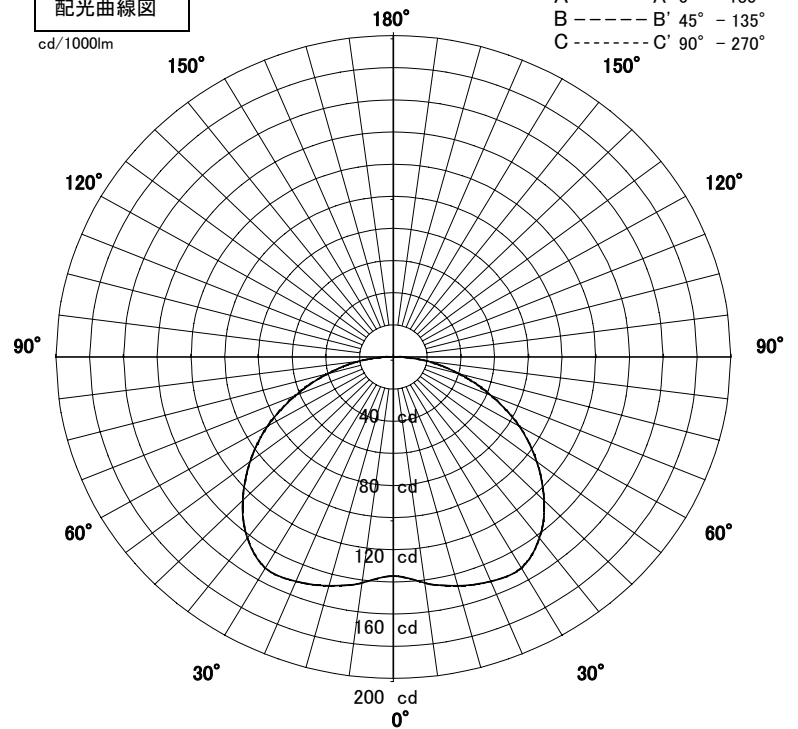


1/2照度角

直射水平面照度

単位:Lx

器具効率	53.7	%
上方効率	0.3	%
下方効率	53.3	%
保守率	良	0.74
	中	0.7
	否	0.62
1/2照度角		
A-A'	76.5	H
B-B'	76.5	H
最大取付間隔		
A-A'	1.58	H
B-B'	1.58	H

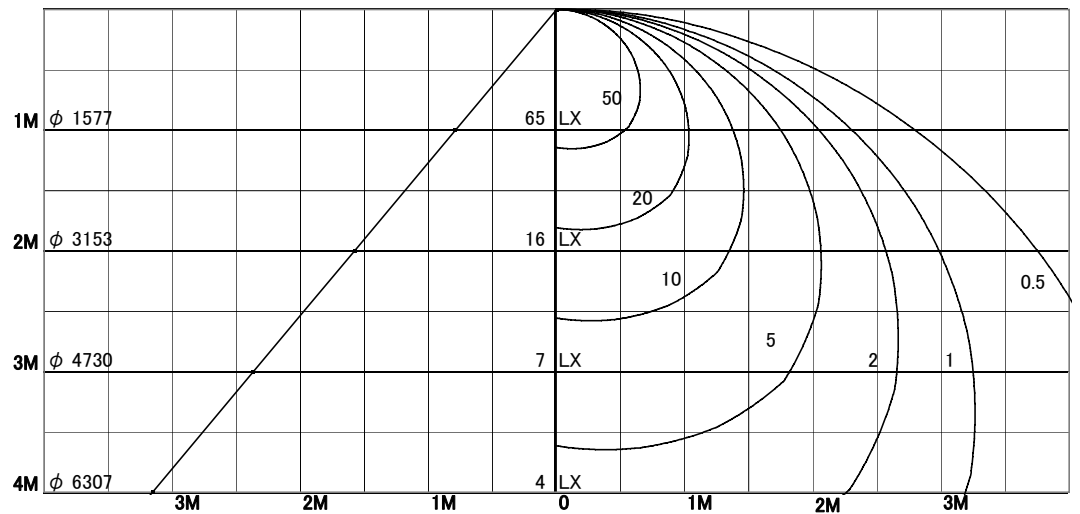

照明率表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁	10%																0%
床	10%																0%
0.60	30	23	19	16	29	23	19	16	28	22	19	16	27	22	18	16	15
0.80	35	28	24	21	34	28	24	21	32	27	23	21	31	26	23	20	19
1.00	38	32	28	25	38	32	28	25	36	31	27	25	34	30	27	24	23
1.25	42	36	32	29	41	36	32	29	39	35	31	29	38	34	31	28	27
1.50	44	39	35	32	43	39	35	32	42	38	34	32	40	37	34	31	30
2.00	48	43	40	37	47	43	40	37	45	42	39	37	43	41	38	36	35
2.50	50	46	43	41	49	45	43	40	47	44	42	40	46	43	41	39	38
3.00	51	48	45	43	50	47	45	43	49	46	44	42	47	45	43	42	40
4.00	53	50	48	46	52	50	48	46	50	48	47	45	49	47	46	45	43
5.00	54	52	50	48	53	51	49	48	51	50	48	47	50	49	48	46	45
7.00	55	53	52	51	54	53	52	50	53	52	51	49	51	50	50	49	47
10.00	56	55	54	53	55	54	53	52	54	53	52	51	52	52	51	50	49