


# 屋内照明器具特性




品名	DF-2933		
光源	EFD21EL		
光束	1520 Lm	灯数	1 灯



配光曲線図

cd/1000lm

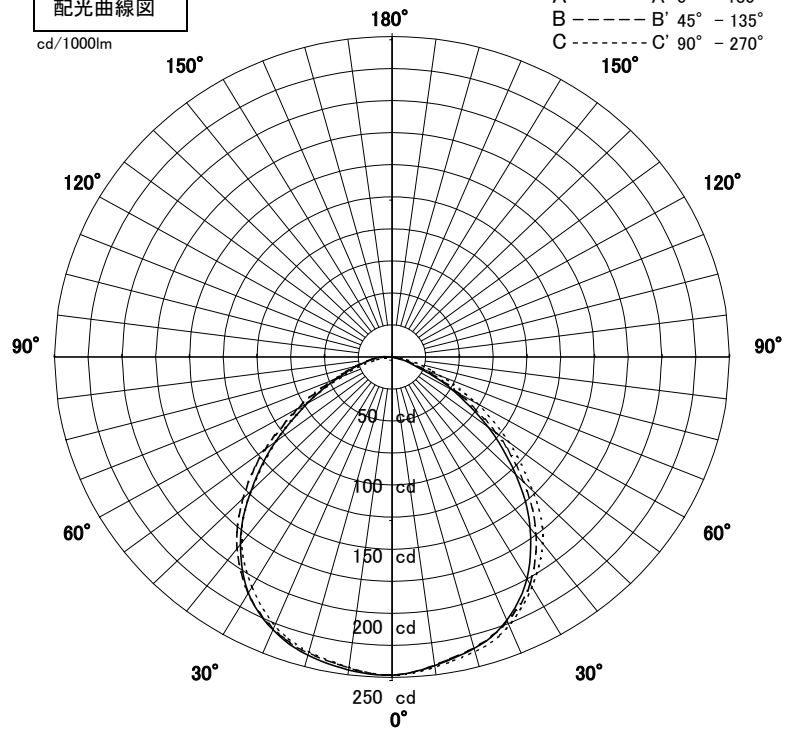


1/2照度角

直射水平面照度

単位:Lx

器具効率	58.0	%
上方効率	0.0	%
下方効率	57.9	%
保守率	良	0.74
	中	0.7
	否	0.61
1/2照度角		
A-A'	63.0	Deg
C-C'	63.5	Deg
最大取付間隔		
A-A'	1.23	H
C-C'	1.24	H

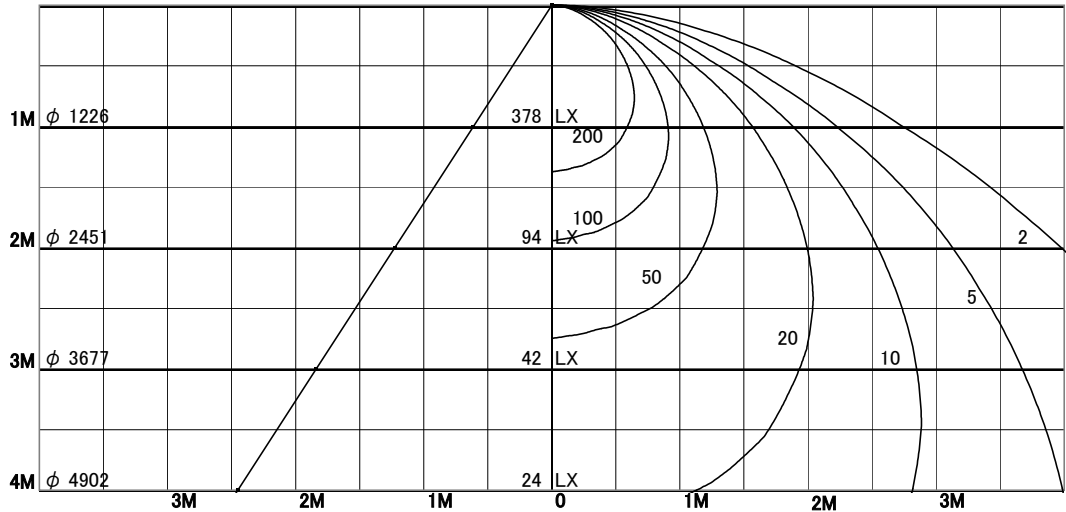

照明率表

	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
天井																	
壁																	
床																	
0.60	36	29	25	22	35	29	25	22	34	28	25	22	33	28	24	22	21
0.80	41	35	31	28	40	34	30	28	39	34	30	27	37	33	30	27	26
1.00	45	39	35	32	44	39	35	32	42	38	35	32	41	37	34	32	31
1.25	48	43	39	37	47	43	39	36	46	42	39	36	44	41	38	36	35
1.50	50	46	43	40	50	46	42	40	48	44	42	39	47	44	41	39	38
2.00	54	50	47	45	53	50	47	45	51	49	46	44	50	47	45	44	42
2.50	56	53	50	48	55	52	50	48	53	51	49	47	52	50	48	47	45
3.00	57	54	52	50	56	54	52	50	55	53	51	49	53	52	50	49	47
4.00	58	56	55	53	58	56	54	53	56	55	53	52	55	53	52	51	50
5.00	59	58	56	55	58	57	56	54	57	56	55	54	56	55	54	53	51
7.00	60	59	58	57	59	58	57	56	58	57	56	55	57	56	55	54	53
10.00	61	60	59	58	60	59	59	58	59	58	57	57	57	57	56	56	54