


屋内照明器具特性




品名	DD-2975		
光源	XR-E WARM		
光束	60 Lm	灯数	1 灯

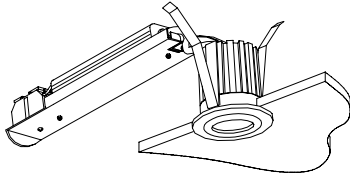

配光曲線図

実光度

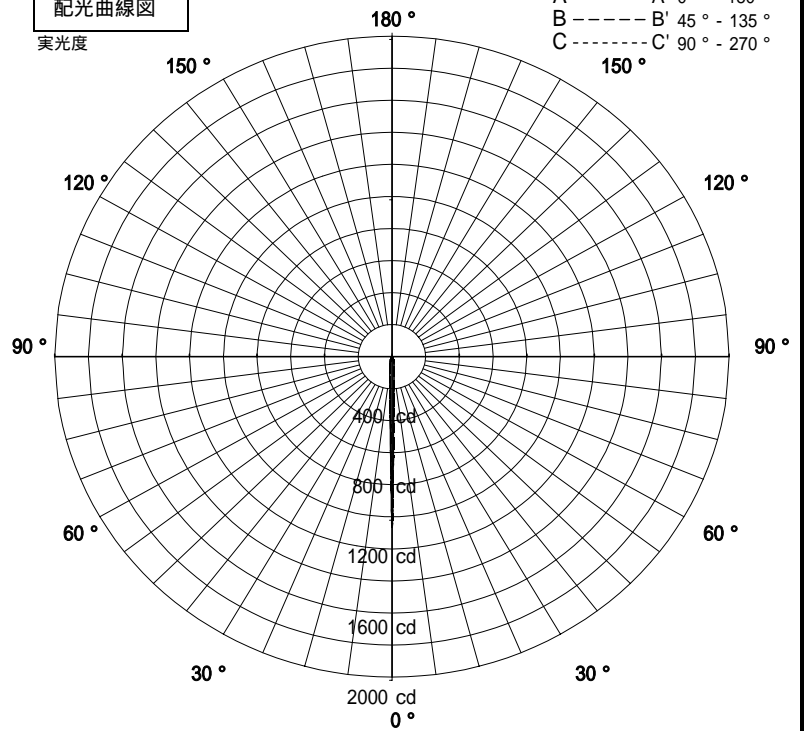


1/2照度角

直射水平面照度

単位:Lx

器具効率	72.4	%
上方効率	0.0	%
下方効率	72.3	%
保守率	良	1
	中	1
	否	1
1/2照度角		
A - A'	7.0	H
C - C'	7.0	H
最大取付間隔		
A - A'	0.12	H
C - C'	0.12	H

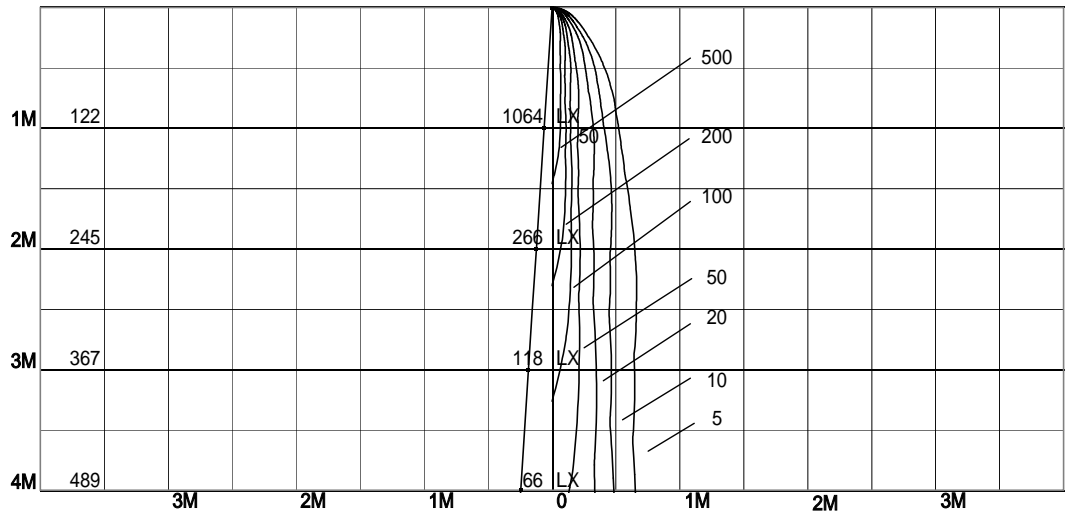

照明率表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁	10%																0%
床	10%																0%
0.60	34	31	29	28	34	31	29	28	33	31	29	28	33	31	29	28	28
0.80	36	34	32	31	36	34	32	31	35	33	32	30	35	33	31	30	30
1.00	38	36	34	33	38	36	34	33	37	35	34	33	36	35	34	33	32
1.25	40	38	36	35	39	37	36	35	39	37	36	35	38	36	35	34	34
1.50	41	39	38	36	40	39	37	36	40	38	37	36	39	38	37	36	35
2.00	42	41	40	39	42	41	40	39	41	40	39	38	40	39	39	38	37
2.50	43	42	41	40	43	42	41	40	42	41	40	40	41	41	40	39	39
3.00	44	43	42	42	43	43	42	41	43	42	41	41	42	41	41	40	40
4.00	45	44	43	43	44	44	43	43	43	43	42	42	42	42	42	41	40
5.00	45	44	44	44	44	44	44	43	44	43	43	43	43	42	42	42	41
7.00	45	45	45	45	45	45	44	44	44	44	44	43	43	43	43	43	42
10.00	46	45	45	45	45	45	45	45	44	44	44	44	43	43	43	43	42