


屋内照明器具特性




品名	DD-2977		
光源	XR-E WARM		
光束	60 Lm	灯数	1 灯

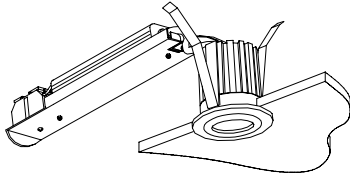

配光曲線図

実光度

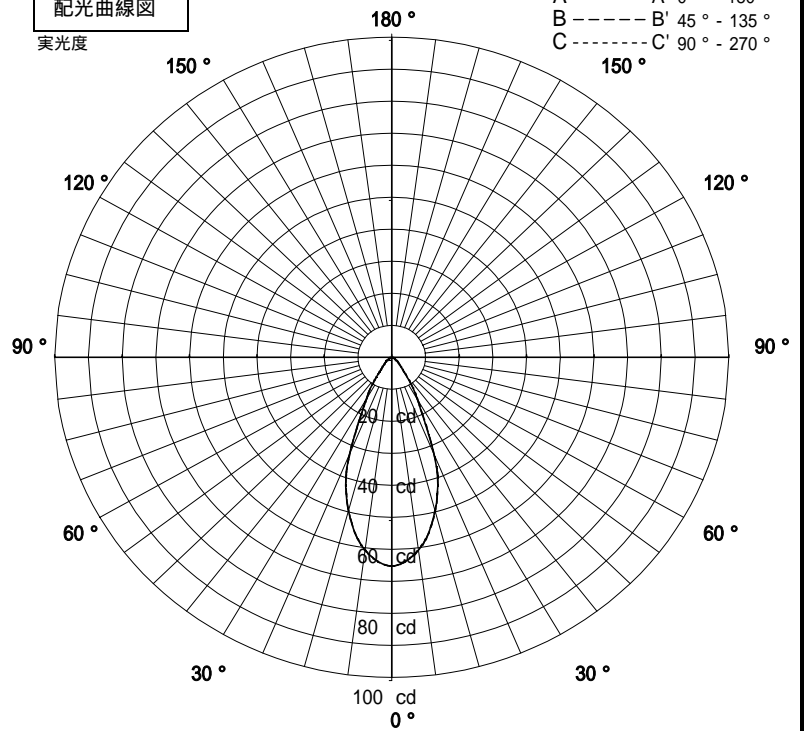


1/2照度角

直射水平面照度

単位:Lx

器具効率	71.7	%
上方効率	0.0	%
下方効率	71.6	%
保守率	良	1
	中	1
	否	1
1/2照度角		
A - A'	40.0	H
C - C'	40.0	H
最大取付間隔		
A - A'	0.73	H
C - C'	0.73	H

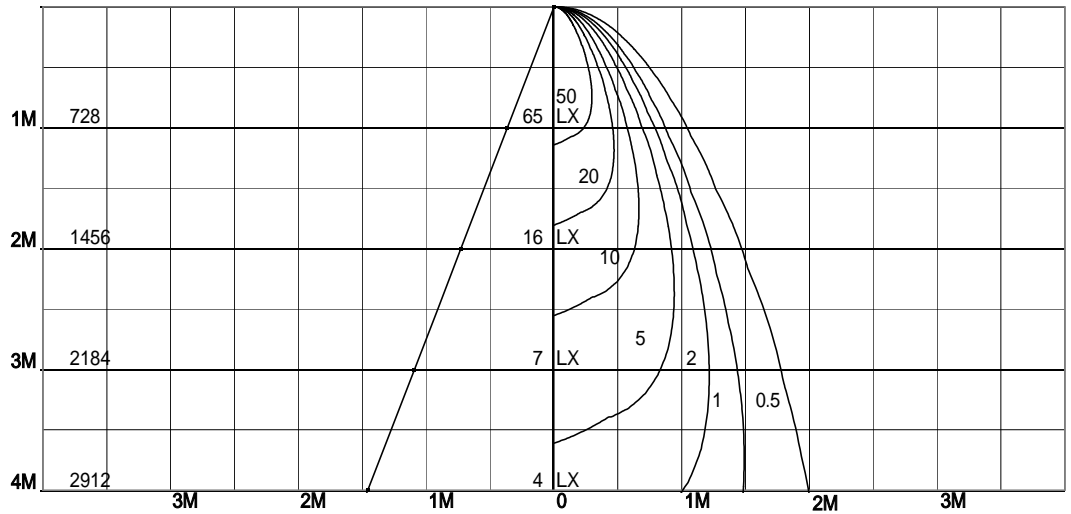

照明率表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁	10%																0%
床	10%																0%
0.60	48	43	40	38	47	43	40	38	46	43	40	38	45	42	40	38	37
0.80	51	47	44	42	51	47	44	42	50	46	44	42	49	46	43	42	41
1.00	54	50	48	46	54	50	48	46	52	49	47	45	51	49	47	45	44
1.25	57	53	51	49	56	53	51	49	55	52	50	48	54	51	50	48	47
1.50	58	55	53	51	57	55	53	51	56	54	52	51	55	53	52	50	49
2.00	61	58	56	55	60	58	56	55	59	57	55	54	57	56	55	54	53
2.50	62	60	59	57	61	60	58	57	60	59	57	56	59	58	57	56	55
3.00	63	61	60	59	62	61	60	59	61	60	59	58	60	59	58	57	56
4.00	64	63	62	61	63	62	61	61	62	61	60	60	61	60	60	59	58
5.00	64	64	63	62	64	63	62	62	62	62	61	61	61	61	60	60	58
7.00	65	65	64	64	64	64	63	63	63	63	62	62	62	62	61	61	60
10.00	65	65	65	65	65	65	64	64	64	63	63	63	62	62	62	62	60