


屋内照明器具特性




品名	DD-2980		
光源	COOLWHITE		
光束	91 Lm	灯数	3 灯

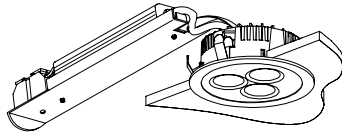

配光曲線図

実光度

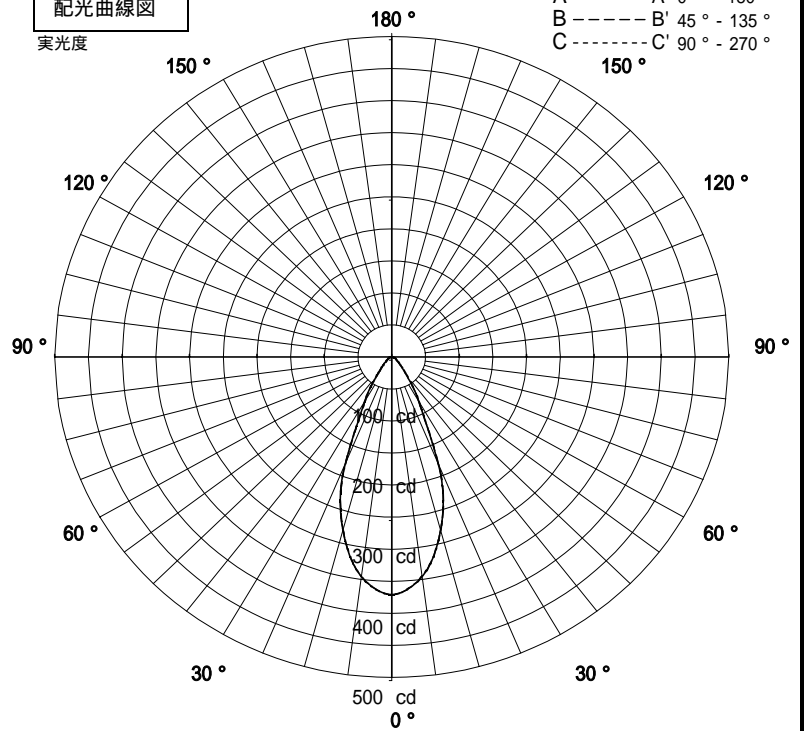


1/2照度角

直射水平面照度

単位:Lx

器具効率	88.0	%
上方効率	0.0	%
下方効率	87.9	%
保守率	良	1
	中	1
	否	1
1/2照度角		
A - A'	40.0	H
C - C'	40.0	H
最大取付間隔		
A - A'	0.73	H
C - C'	0.73	H

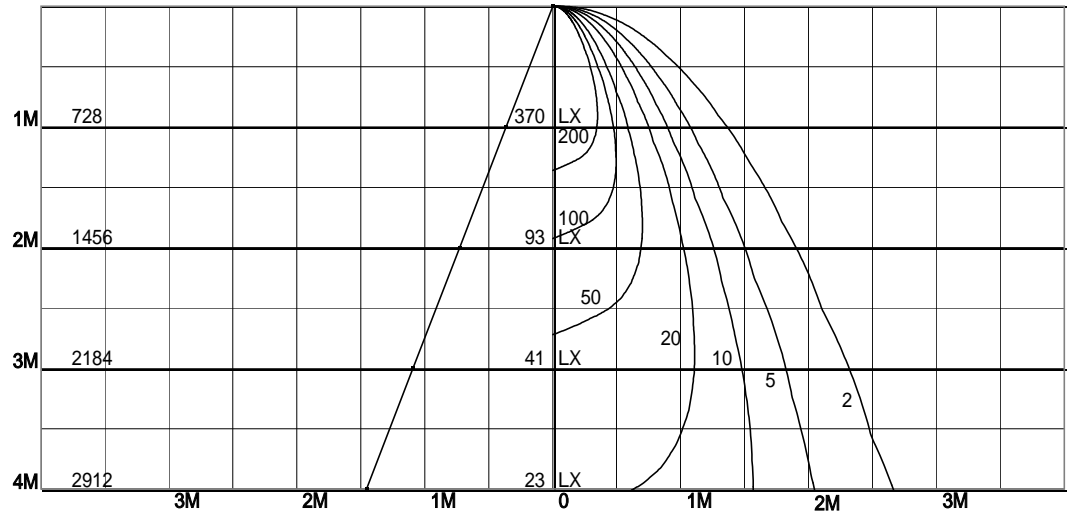

照明率表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁	10%																0%
床	10%																0%
0.60	58	53	49	47	58	52	49	47	56	52	49	47	55	51	49	46	46
0.80	63	57	54	51	62	57	54	51	61	56	53	51	59	56	53	51	50
1.00	66	62	58	56	65	61	58	56	64	60	58	55	63	59	57	55	54
1.25	69	65	62	60	68	64	62	59	67	64	61	59	65	63	60	59	57
1.50	71	67	65	62	70	67	64	62	69	66	64	62	67	65	63	61	60
2.00	74	71	69	67	73	71	68	67	72	69	68	66	70	68	67	65	64
2.50	76	73	72	70	75	73	71	70	73	72	70	69	72	70	69	68	67
3.00	77	75	74	72	76	74	73	72	74	73	72	71	73	72	71	70	69
4.00	78	77	76	74	77	76	75	74	76	75	74	73	74	73	73	72	70
5.00	79	78	77	76	78	77	76	75	76	76	75	74	75	74	74	73	71
7.00	79	79	78	78	79	78	77	77	77	77	76	76	76	75	75	75	73
10.00	80	80	79	79	79	79	78	78	78	77	77	77	76	76	76	75	73