


屋内照明器具特性




品名	DD-2986		
光源	KZZ-534		
光束	38 Lm	灯数	1 灯

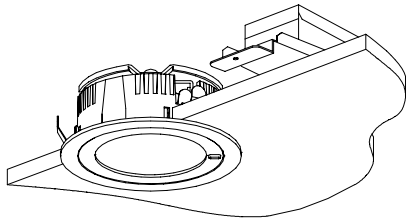

配光曲線図

cd/1000lm

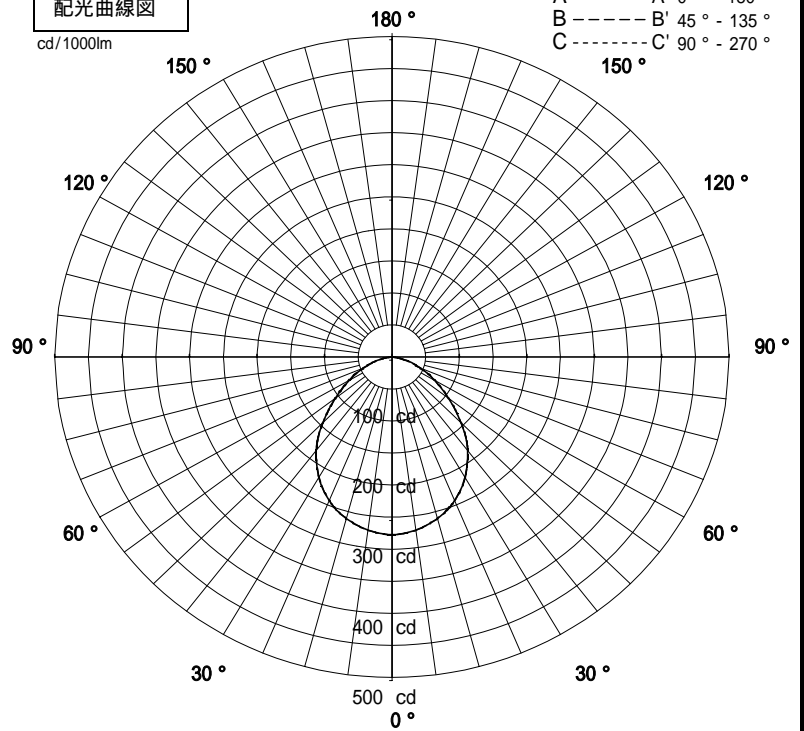


1/2照度角

直射水平面照度

単位:Lx

器具効率	61.3	%
上方効率	0.0	%
下方効率	61.3	%
保守率	良	0.84
	中	0.79
	否	0.7
1/2照度角		
A - A'	60.5	H
C - C'	60.5	H
最大取付間隔		
A - A'	1.17	H
C - C'	1.17	H

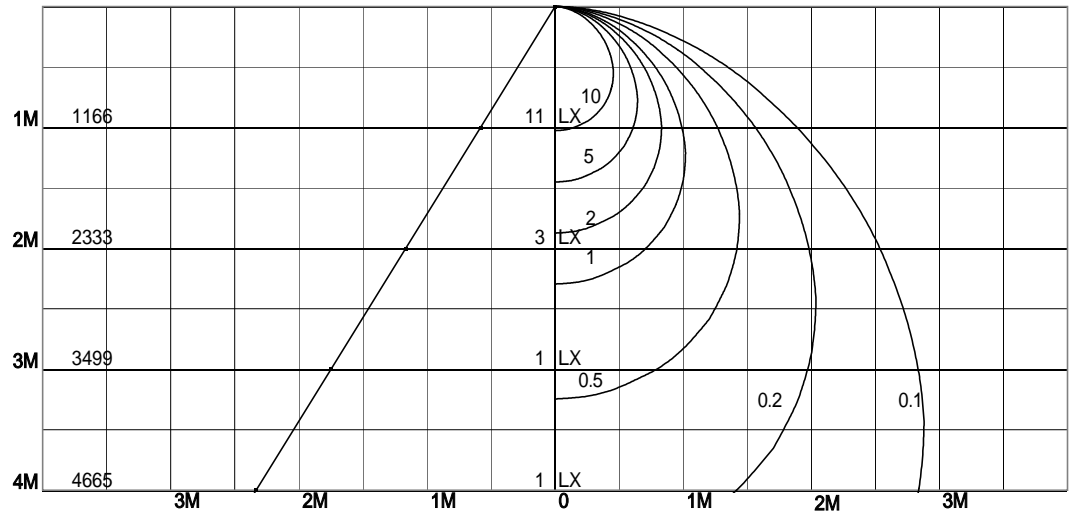

照明率表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁	10%				10%				10%				10%				0%
床	10%				10%				10%				10%				0%
0.60	38	31	27	24	37	31	26	23	36	30	26	23	34	29	26	23	22
0.80	43	37	32	29	42	36	32	29	41	35	32	29	39	35	31	29	28
1.00	47	41	37	34	46	41	37	34	44	40	36	33	43	39	36	33	32
1.25	50	45	41	38	50	45	41	38	48	44	40	38	46	43	40	38	36
1.50	53	48	45	42	52	48	44	42	50	47	44	41	49	46	43	41	39
2.00	56	53	50	47	55	52	49	47	54	51	48	46	52	50	48	46	44
2.50	58	55	53	50	58	55	52	50	56	53	51	50	54	52	51	49	48
3.00	60	57	55	53	59	57	54	53	57	55	53	52	56	54	53	51	50
4.00	61	59	57	56	61	59	57	55	59	57	56	55	58	56	55	54	52
5.00	62	61	59	58	61	60	58	57	60	59	57	56	58	57	56	55	54
7.00	63	62	61	60	63	61	60	59	61	60	59	58	60	59	58	57	56
10.00	64	63	62	62	63	62	62	61	62	61	60	60	60	60	59	59	57