


# 屋内照明器具特性




品名	DD-3001		
光源	WW-1107L		
光束	2.5 Lm	灯数	1 灯



配光曲線図

実光度

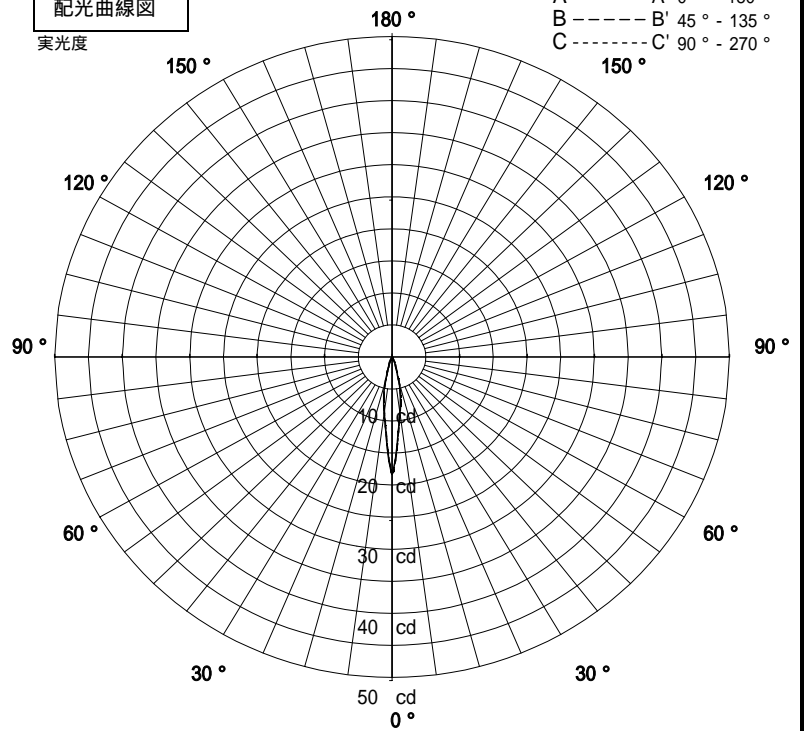


1/2照度角

直射水平面照度

単位:Lx

器具効率	90.4	%
上方効率	0.0	%
下方効率	90.4	%
保守率	良	0.84
	中	0.79
	否	0.7
1/2照度角		
A - A'	17.0	H
C - C'	17.0	H
最大取付間隔		
A - A'	0.30	H
C - C'	0.30	H

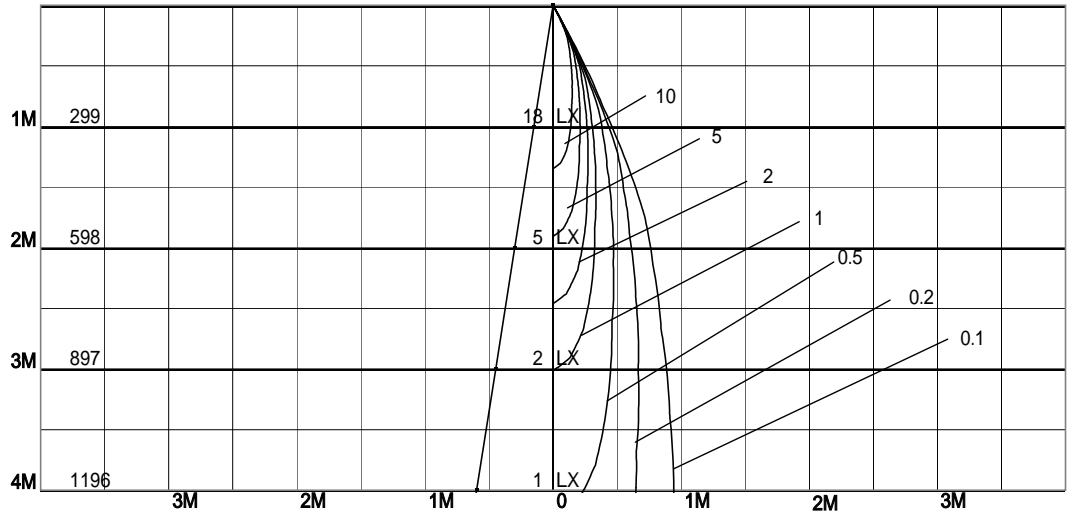

照明率表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁	10%																0%
床	10%																0%
0.60	58	55	52	51	58	54	52	51	57	54	52	51	56	54	52	50	50
0.80	61	58	55	54	61	58	55	54	60	57	55	54	59	56	55	53	53
1.00	64	61	59	57	63	60	58	57	62	60	58	57	61	59	58	56	56
1.25	66	63	61	60	65	63	61	59	64	62	60	59	63	61	60	59	58
1.50	67	65	63	62	66	64	63	61	65	63	62	61	64	63	61	60	59
2.00	69	67	66	65	68	67	66	65	67	66	65	64	66	65	64	63	62
2.50	70	69	68	67	70	69	68	67	68	68	67	66	67	67	66	65	64
3.00	71	70	69	69	70	70	69	68	69	69	68	68	68	68	67	67	66
4.00	72	71	71	70	71	71	70	70	70	70	69	69	69	69	68	68	67
5.00	72	72	72	71	72	71	71	71	70	70	70	70	69	69	69	69	67
7.00	73	73	73	72	72	72	72	72	71	71	71	71	70	70	70	70	68
10.00	73	73	73	73	72	72	72	73	71	71	71	71	70	70	70	70	68