


# 屋内照明器具特性




品名	DD-3002		
光源	WW-1103L		
光束	12 Lm	灯数	1 灯



配光曲線図

実光度

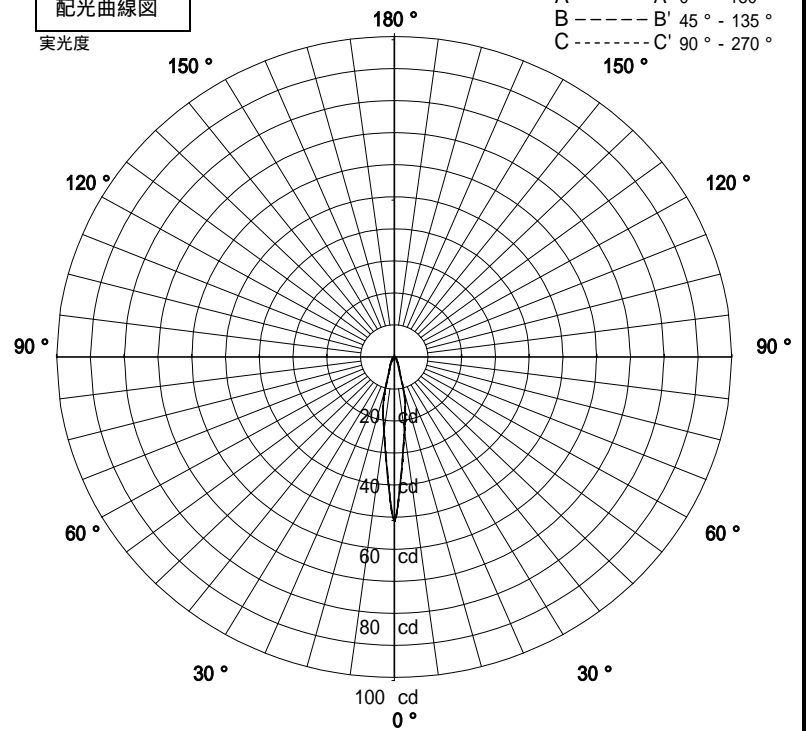


1/2照度角

直射水平面照度

単位:Lx

器具効率	71.0	%
上方効率	0.0	%
下方効率	71.0	%
保守率	良	0.84
	中	0.79
	否	0.7
1/2照度角		
A - A'	15.5	H
C - C'	15.5	H
最大取付間隔		
A - A'	0.27	H
C - C'	0.27	H

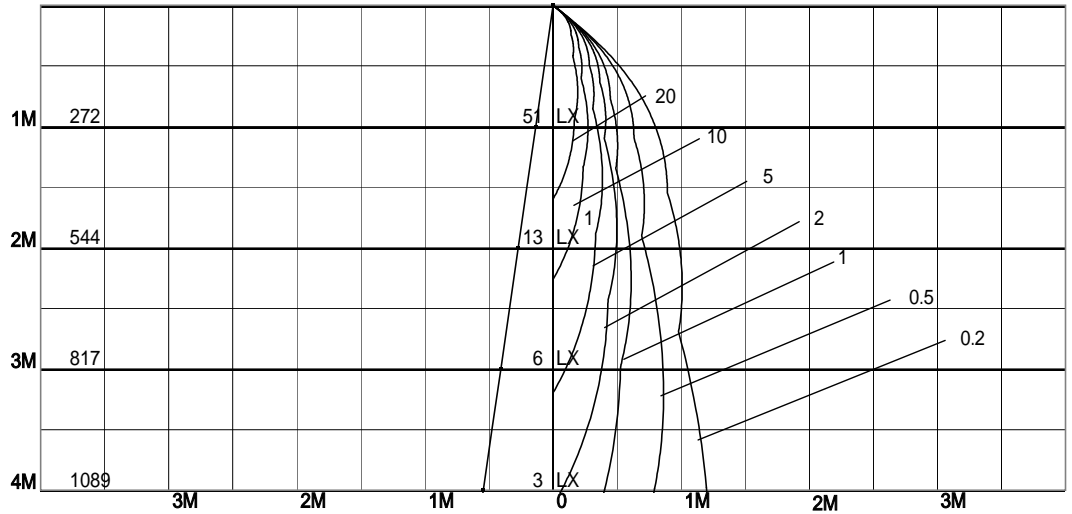

照明率表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁	10%				10%				10%				10%				0%
床	10%																0%
0.60	49	46	43	42	49	45	43	42	48	45	43	42	47	45	43	42	41
0.80	52	49	47	45	51	48	46	45	51	48	46	45	50	47	46	45	44
1.00	54	52	50	48	54	51	49	48	53	51	49	48	52	50	49	47	47
1.25	56	54	52	50	56	53	52	50	55	53	51	50	54	52	51	50	49
1.50	57	55	54	52	57	55	53	52	56	54	53	52	55	53	52	51	50
2.00	59	58	56	55	59	57	56	55	58	57	56	55	57	56	55	54	53
2.50	60	59	58	57	60	59	58	57	59	58	57	57	58	57	56	56	55
3.00	61	60	60	59	61	60	59	59	60	59	58	58	59	58	58	57	56
4.00	62	61	61	60	61	61	60	60	60	60	59	59	59	59	59	58	57
5.00	62	62	61	61	62	61	61	61	61	60	60	60	60	59	59	59	58
7.00	63	63	62	62	62	62	62	62	61	61	61	61	60	60	60	60	58
10.00	63	63	63	63	62	62	62	62	61	61	61	61	60	60	60	60	59