


屋内照明器具特性




品名	DD-3003		
光源	WW-1103L		
光束	12 Lm	灯数	1 灯



配光曲線図

実光度

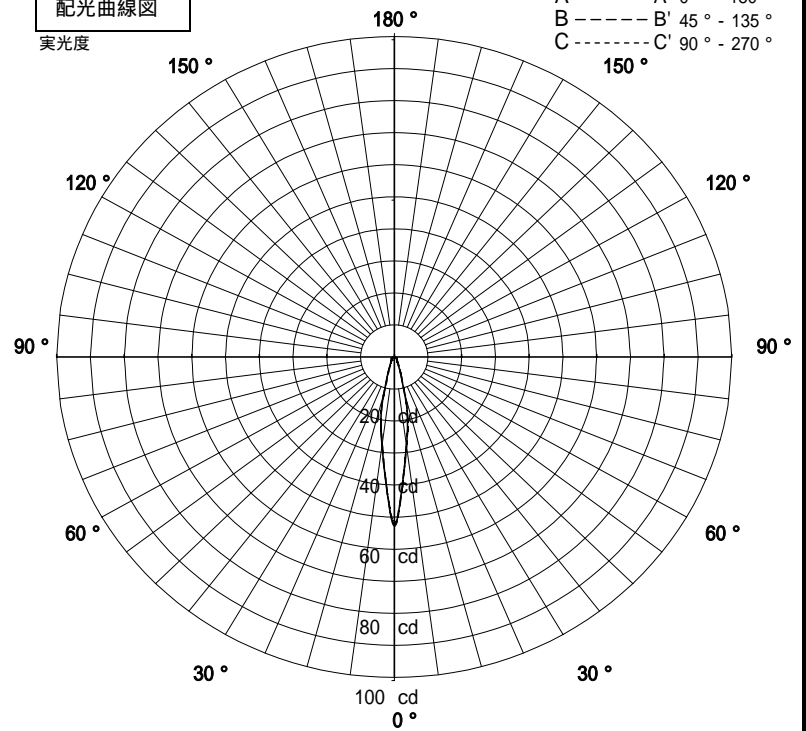


1/2照度角

直射水平面照度

単位:Lx

器具効率	97.3	%
上方効率	0.0	%
下方効率	97.3	%
保守率	良	0.84
	中	0.79
	否	0.7
1/2照度角		
A - A'	17.0	H
C - C'	17.0	H
最大取付間隔		
A - A'	0.30	H
C - C'	0.30	H

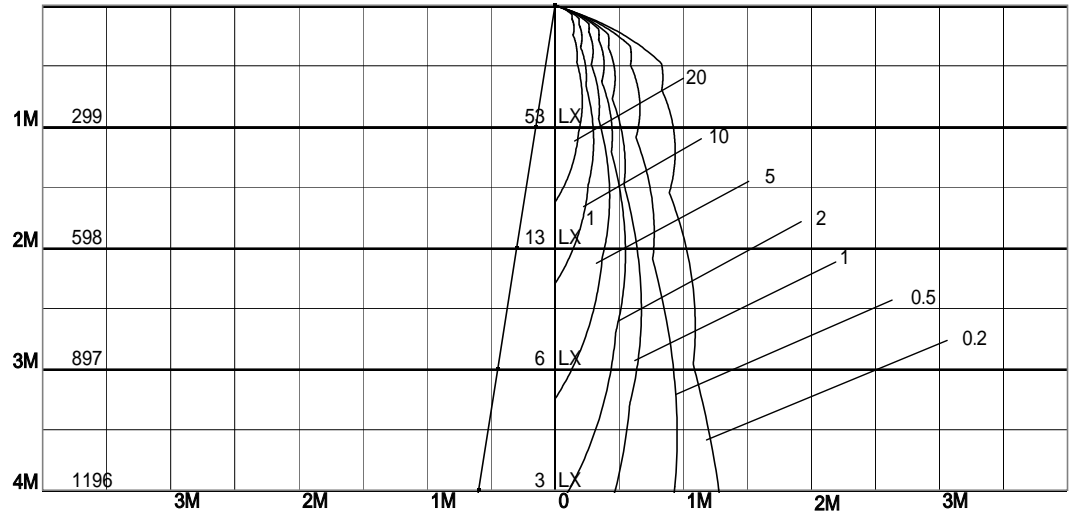

照明率表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁	10%																0%
床	10%																0%
0.60	63	56	51	48	62	55	51	48	60	55	51	48	59	54	51	48	47
0.80	68	62	58	54	67	61	57	54	66	61	57	54	64	60	56	54	53
1.00	73	67	63	60	72	66	63	60	70	65	62	59	68	65	62	59	58
1.25	76	71	68	65	75	71	67	64	73	70	67	64	72	69	66	64	62
1.50	79	74	71	68	78	74	71	68	76	73	70	67	74	71	69	67	65
2.00	82	79	76	74	81	78	76	74	80	77	75	73	78	76	74	72	71
2.50	84	82	80	78	83	81	79	77	82	80	78	76	80	78	77	76	74
3.00	86	84	82	80	85	83	81	80	83	82	80	79	81	80	79	78	76
4.00	87	86	84	83	86	85	84	83	85	83	82	81	83	82	81	80	78
5.00	88	87	86	85	87	86	85	84	85	84	84	83	84	83	82	82	80
7.00	89	88	88	87	88	87	87	86	86	86	85	85	85	84	84	83	81
10.00	90	89	89	88	89	88	88	87	87	87	86	86	85	85	85	84	82