


# 屋内照明器具特性




品名	DD-3004		
光源	WW-1103L		
光束	12 Lm	灯数	1 灯



配光曲線図

実光度

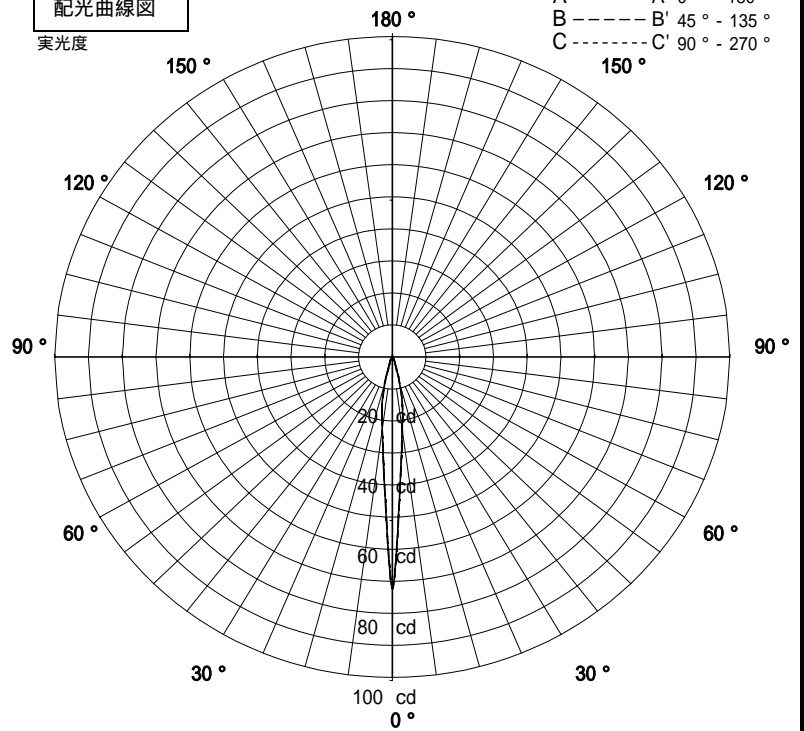


1/2照度角

直射水平面照度

単位:Lx

器具効率	56.9	%
上方効率	0.0	%
下方効率	56.9	%
保守率	良	0.84
	中	0.79
	否	0.7
1/2照度角		
A - A'	13.5	H
C - C'	13.5	H
最大取付間隔		
A - A'	0.24	H
C - C'	0.24	H

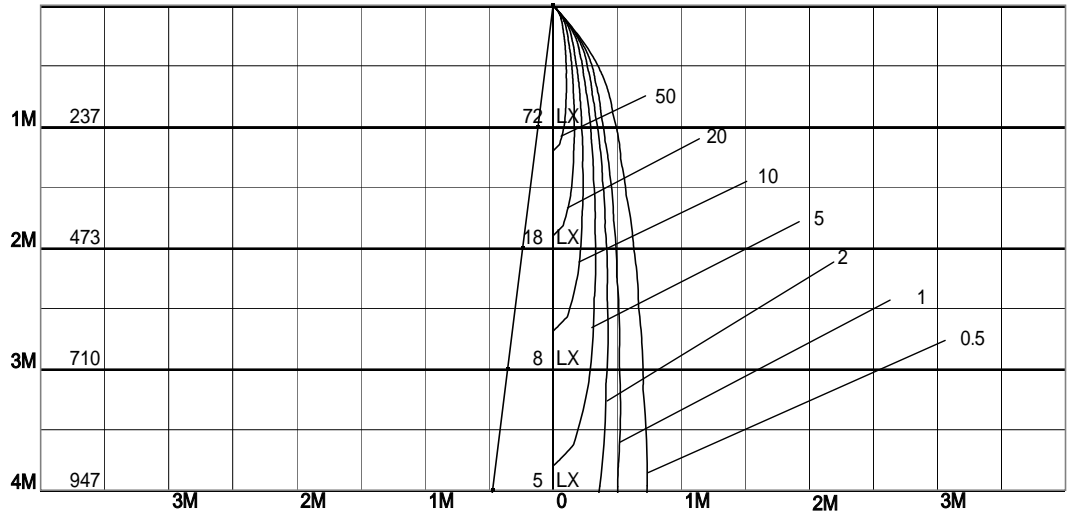

照明率表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁	10%																0%
床	10%																0%
0.60	37	35	34	33	37	35	33	32	37	35	33	32	36	34	33	32	32
0.80	39	37	36	35	39	37	35	34	38	37	35	34	38	36	35	34	34
1.00	41	39	38	37	41	39	38	37	40	38	37	36	39	38	37	36	36
1.25	42	40	39	38	42	40	39	38	41	40	39	38	40	39	38	38	37
1.50	43	42	40	39	43	41	40	39	42	41	40	39	41	40	39	39	38
2.00	44	43	42	42	44	43	42	41	43	42	42	41	42	42	41	41	40
2.50	45	44	44	43	45	44	43	43	44	43	43	42	43	43	42	42	41
3.00	46	45	45	44	45	45	44	44	44	44	44	43	44	43	43	43	42
4.00	46	46	45	45	46	45	45	45	45	45	44	44	44	44	44	44	43
5.00	46	46	46	46	46	46	46	45	45	45	45	45	44	44	44	44	43
7.00	47	47	47	46	46	46	46	46	45	45	45	45	45	45	45	45	44
10.00	47	47	47	47	46	46	47	47	46	46	46	46	45	45	45	45	44