


屋内照明器具特性




品名	DF-3030		
光源	EFD15EL/13-E17		
光束	810 Lm	灯数	1 灯



配光曲線図

cd/1000lm

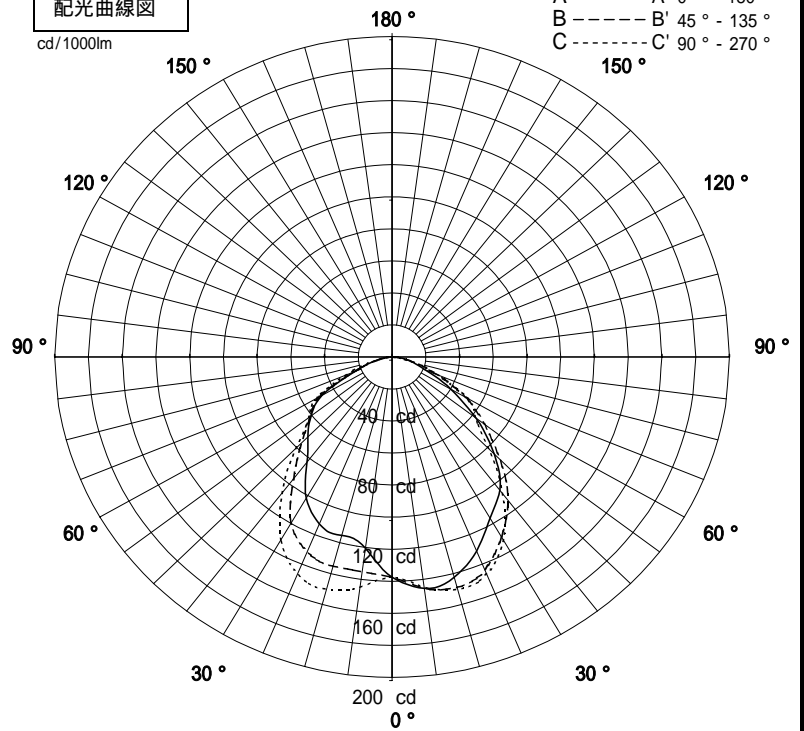


1/2照度角

直射水平面照度

単位:Lx

器具効率	35.1	%
上方効率	0.0	%
下方効率	35.1	%
保守率	良	0.74
	中	0.7
	否	0.61
1/2照度角		
A - A'	61.0	Deg
C - C'	68.0	Deg
最大取付間隔		
A - A'	1.18	H
C - C'	1.35	H

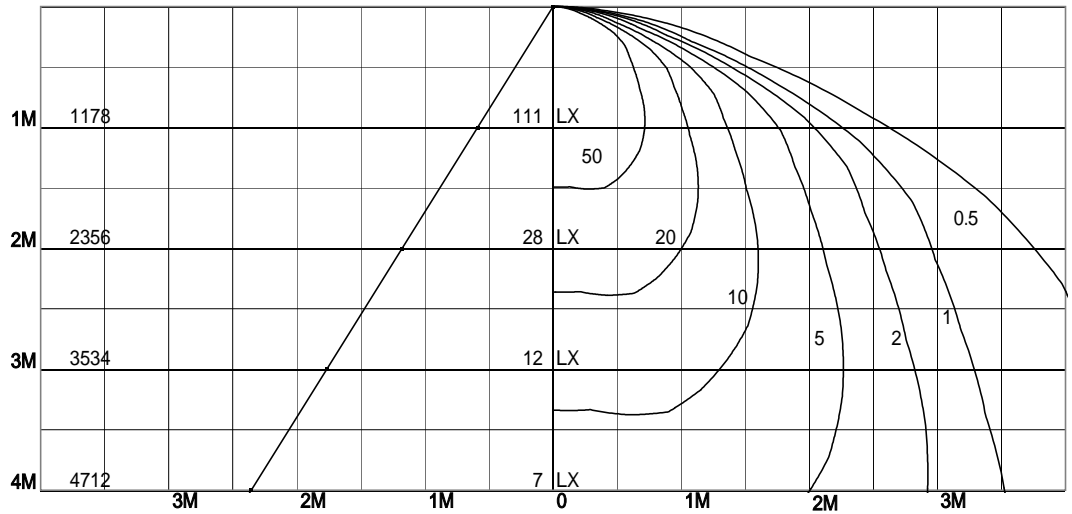

照明率表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁	10%																
床	10%																
0.60	21	17	15	13	21	17	15	13	20	17	15	13	19	16	14	13	12
0.80	24	21	18	16	24	20	18	16	23	20	18	16	22	20	18	16	15
1.00	27	23	21	19	26	23	21	19	25	22	20	19	24	22	20	19	18
1.25	29	26	23	22	28	25	23	21	27	25	23	21	26	24	23	21	20
1.50	30	27	25	24	30	27	25	23	29	26	25	23	28	26	24	23	22
2.00	32	30	28	27	32	30	28	27	31	29	27	26	30	28	27	26	25
2.50	33	32	30	29	33	31	30	29	32	31	29	28	31	30	29	28	27
3.00	34	33	31	30	34	32	31	30	33	32	31	30	32	31	30	29	28
4.00	35	34	33	32	35	34	33	32	34	33	32	31	33	32	31	31	30
5.00	36	35	34	33	35	34	33	33	34	34	33	32	34	33	32	32	31
7.00	36	36	35	34	36	35	35	34	35	34	34	33	34	34	33	33	32
10.00	37	36	36	35	36	36	35	35	36	35	35	34	35	34	34	34	33