


屋内照明器具特性




品名	DF-3038		
光源	EFA12EL		
光束	810 Lm	灯数	1 灯



配光曲線図

cd/1000lm

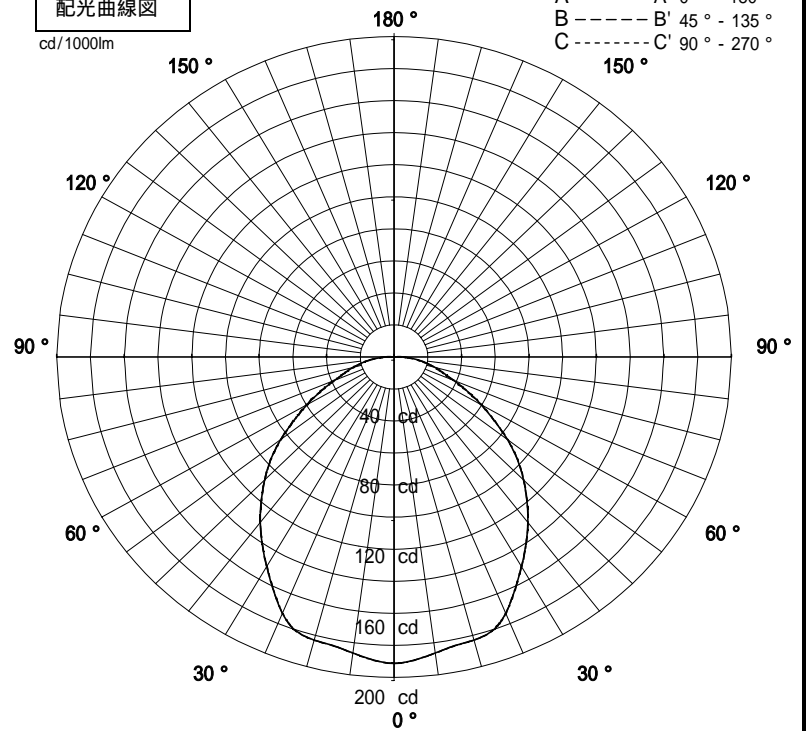


1/2照度角

直射水平面照度

単位:Lx

器具効率	47.0	%
上方効率	0.3	%
下方効率	46.7	%
保守率	良	0.74
	中	0.7
	否	0.61
1/2照度角		
A - A'	61.0	Deg
C - C'	61.0	Deg
最大取付間隔		
A - A'	1.18	H
C - C'	1.18	H

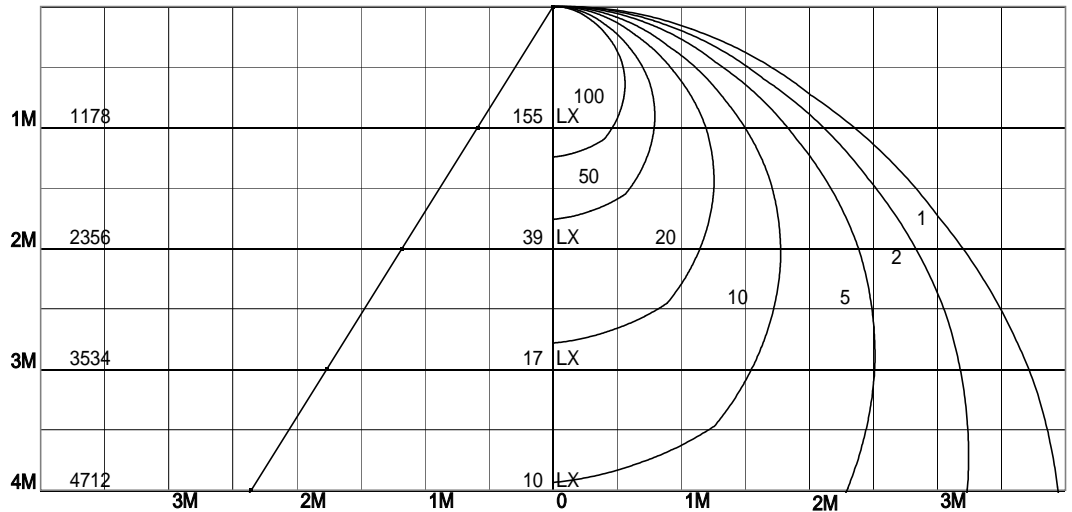

照明率表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁	10%																
床	10%																
0.60	28	22	19	16	27	22	19	16	26	21	18	16	25	21	18	16	15
0.80	32	27	23	21	31	26	23	20	30	26	23	20	29	25	22	20	19
1.00	35	30	27	24	34	30	26	24	33	29	26	24	32	28	26	24	23
1.25	37	33	30	27	37	33	30	27	35	32	29	27	34	31	29	27	26
1.50	39	35	32	30	39	35	32	30	37	34	32	30	36	33	31	29	28
2.00	42	39	36	34	41	38	36	34	40	37	35	34	39	37	35	33	32
2.50	44	41	39	37	43	40	38	37	42	40	38	36	40	39	37	36	35
3.00	45	42	40	39	44	42	40	39	43	41	39	38	42	40	39	38	36
4.00	46	44	43	41	45	44	42	41	44	43	41	40	43	42	41	40	38
5.00	47	45	44	43	46	45	43	42	45	44	43	42	44	43	42	41	40
7.00	48	47	45	45	47	46	45	44	46	45	44	43	45	44	43	43	41
10.00	48	47	47	46	48	47	46	46	47	46	45	45	45	45	44	44	43