


屋内照明器具特性




品名	DF-3040		
光源	EFA22EL		
光束	1520 Lm	灯数	1 灯



配光曲線図

cd/1000lm

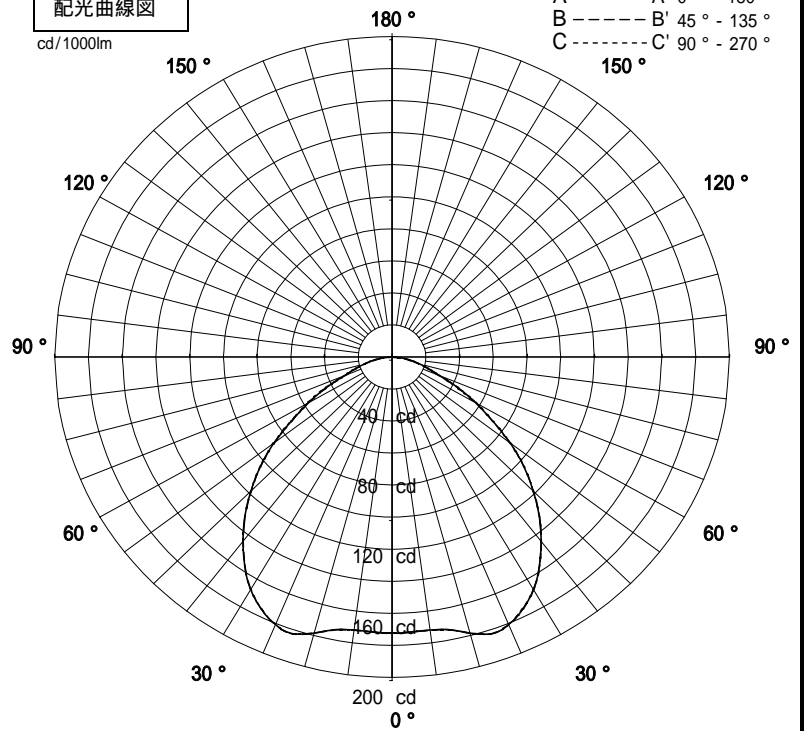


1/2照度角

直射水平面照度

単位:Lx

器具効率	46.8	%
上方効率	0.0	%
下方効率	46.8	%
保守率	良	0.74
	中	0.7
	否	0.61
1/2照度角		
A - A'	69.0	Deg
C - C'	69.0	Deg
最大取付間隔		
A - A'	1.37	H
C - C'	1.37	H

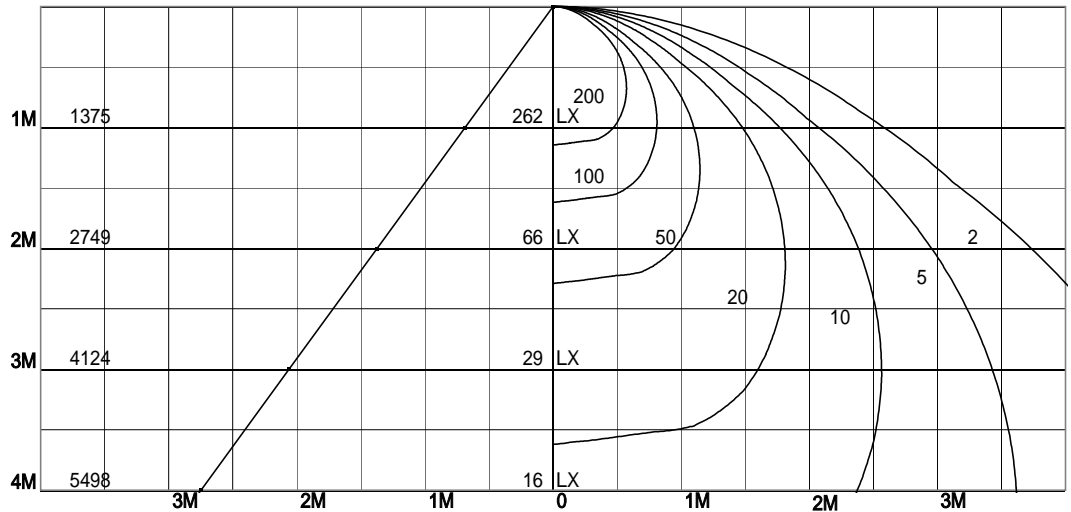

照明率表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁	10%																0%
床	10%																0%
0.60	29	23	20	17	28	23	20	17	27	22	20	17	26	22	19	17	16
0.80	33	28	24	22	32	27	24	22	31	27	24	22	30	26	24	22	21
1.00	36	31	28	26	35	31	28	26	34	30	28	25	33	30	27	25	24
1.25	39	35	32	29	38	34	31	29	37	33	31	29	35	33	30	29	28
1.50	41	37	34	32	40	37	34	32	39	36	33	31	37	35	33	31	30
2.00	43	40	38	36	43	40	38	36	41	39	37	35	40	38	37	35	34
2.50	45	42	40	39	44	42	40	38	43	41	39	38	42	40	39	38	36
3.00	46	44	42	41	45	43	42	40	44	42	41	40	43	42	40	39	38
4.00	47	46	44	43	46	45	44	42	45	44	43	42	44	43	42	41	40
5.00	48	46	45	44	47	46	45	44	46	45	44	43	45	44	43	42	41
7.00	49	48	47	46	48	47	46	45	47	46	45	45	46	45	45	44	43
10.00	49	48	48	47	49	48	47	47	47	47	46	46	46	46	45	45	44