


屋内照明器具特性




| | | | |
|----|-----------|----|-----|
| 品名 | DF-3047 | | |
| 光源 | FHT32EX-L | | |
| 光束 | 2400 Lm | 灯数 | 1 灯 |

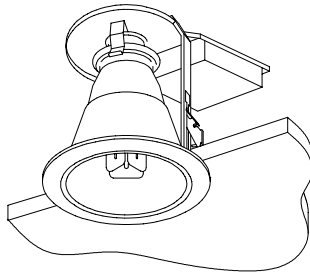

配光曲線図

cd/1000lm

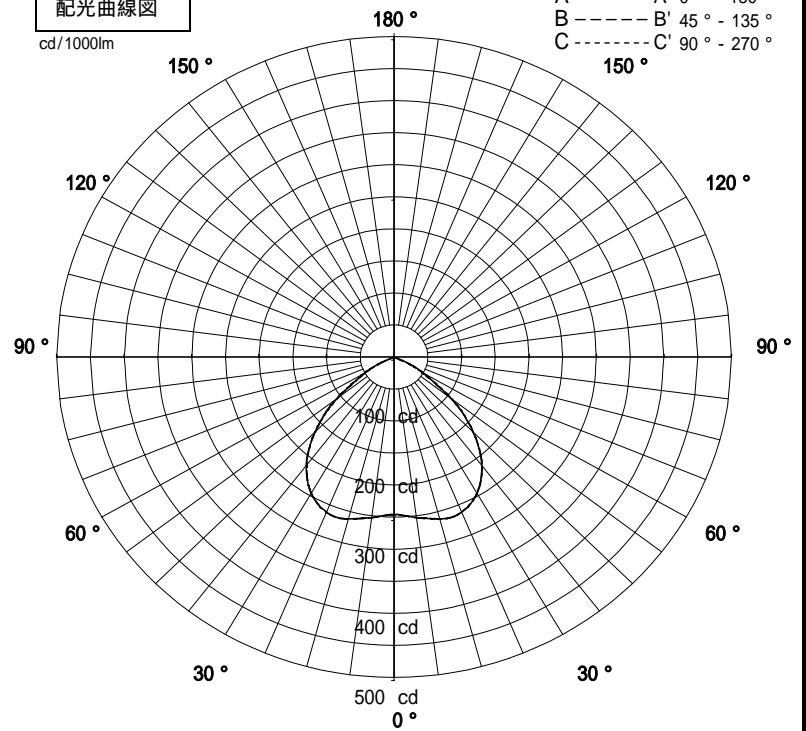


1/2照度角

直射水平面照度

単位:Lx

| | | |
|--------|------|------|
| 器具効率 | 58.7 | % |
| 上方効率 | 0.0 | % |
| 下方効率 | 58.7 | % |
| 保守率 | 良 | 0.74 |
| | 中 | 0.7 |
| | 否 | 0.61 |
| 1/2照度角 | | |
| A - A' | 70.0 | Deg |
| C - C' | 70.0 | Deg |
| 最大取付間隔 | | |
| A - A' | 1.40 | H |
| C - C' | 1.40 | H |

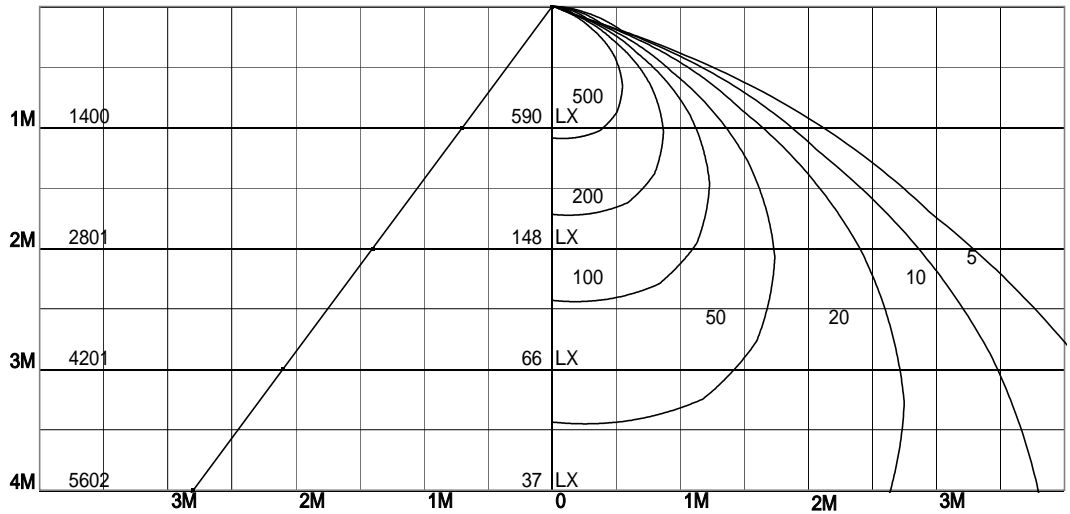

照明率表

| 天井 | 80% | | | | 70% | | | | 50% | | | | 30% | | | | 0% |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|
| | 70% | 50% | 30% | 10% | 70% | 50% | 30% | 10% | 70% | 50% | 30% | 10% | 70% | 50% | 30% | 10% | 0% |
| 壁 | 10% | | | | | | | | | | | | | | | | |
| 床 | 10% | | | | | | | | | | | | | | | | |
| 0.60 | 38 | 32 | 28 | 25 | 37 | 32 | 28 | 25 | 36 | 31 | 28 | 25 | 35 | 30 | 27 | 25 | 24 |
| 0.80 | 43 | 38 | 34 | 31 | 43 | 37 | 34 | 31 | 41 | 37 | 33 | 31 | 40 | 36 | 33 | 31 | 30 |
| 1.00 | 47 | 42 | 39 | 36 | 47 | 42 | 39 | 36 | 45 | 41 | 38 | 36 | 44 | 40 | 38 | 36 | 35 |
| 1.25 | 51 | 46 | 43 | 41 | 50 | 46 | 43 | 40 | 48 | 45 | 42 | 40 | 47 | 44 | 42 | 40 | 39 |
| 1.50 | 53 | 49 | 46 | 44 | 52 | 49 | 46 | 44 | 51 | 48 | 45 | 43 | 49 | 47 | 45 | 43 | 42 |
| 2.00 | 56 | 53 | 51 | 49 | 55 | 53 | 50 | 48 | 54 | 52 | 50 | 48 | 52 | 51 | 49 | 47 | 46 |
| 2.50 | 58 | 55 | 53 | 52 | 57 | 55 | 53 | 51 | 56 | 54 | 52 | 51 | 54 | 53 | 51 | 50 | 49 |
| 3.00 | 59 | 57 | 55 | 54 | 58 | 56 | 55 | 53 | 57 | 55 | 54 | 53 | 55 | 54 | 53 | 52 | 51 |
| 4.00 | 60 | 58 | 57 | 56 | 59 | 58 | 57 | 55 | 58 | 57 | 56 | 55 | 57 | 56 | 55 | 54 | 52 |
| 5.00 | 61 | 59 | 58 | 57 | 60 | 59 | 58 | 57 | 58 | 57 | 57 | 56 | 57 | 56 | 56 | 55 | 53 |
| 7.00 | 61 | 60 | 59 | 59 | 61 | 60 | 59 | 58 | 59 | 58 | 58 | 57 | 58 | 57 | 57 | 56 | 55 |
| 10.00 | 62 | 61 | 60 | 60 | 61 | 60 | 60 | 59 | 60 | 59 | 59 | 58 | 58 | 58 | 57 | 57 | 55 |