


屋内照明器具特性




品名	DF-3049		
光源	FHT42EX-L		
光束	3200 Lm	灯数	1 灯



配光曲線図

cd/1000lm

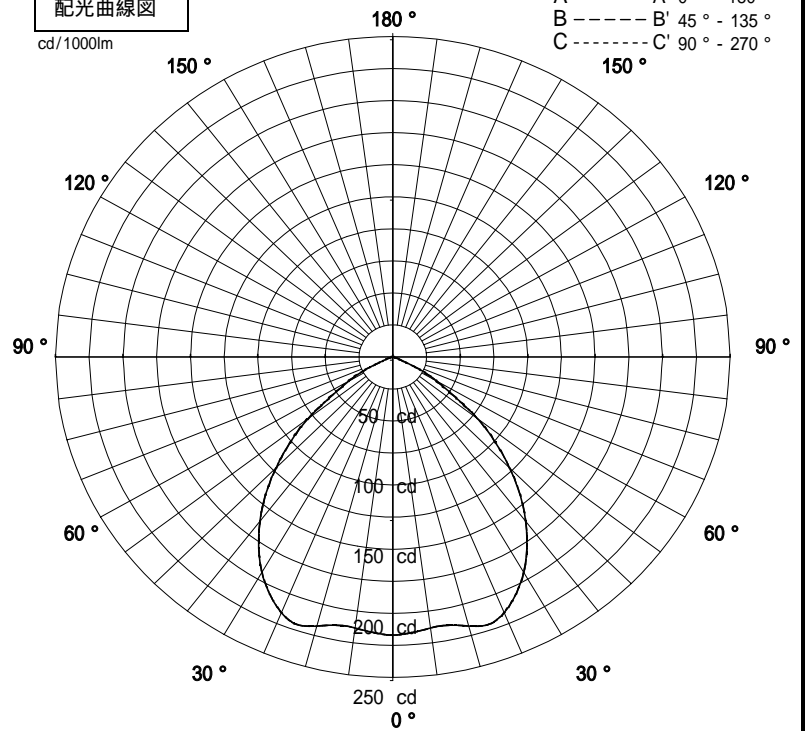


1/2照度角

直射水平面照度

単位:Lx

器具効率	46.2	%
上方効率	0.0	%
下方効率	46.2	%
保守率	良	0.74
	中	0.7
	否	0.61
1/2照度角		
A - A'	65.5	Deg
C - C'	65.5	Deg
最大取付間隔		
A - A'	1.29	H
C - C'	1.29	H

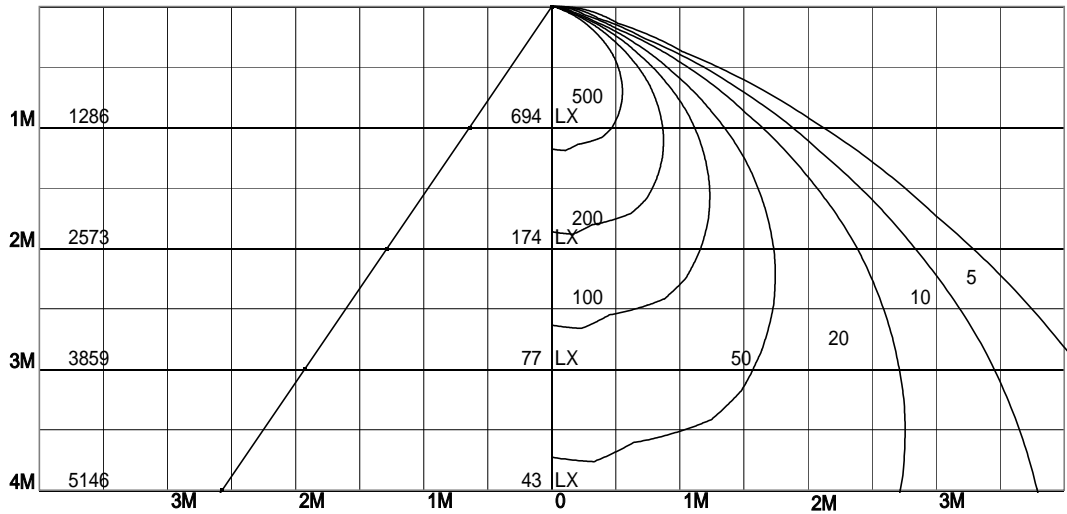

照明率表

	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
天井																	
壁																	
床																	
0.60	30	25	22	20	30	25	22	20	29	25	22	20	28	24	22	20	19
0.80	34	30	27	25	34	30	27	25	33	29	26	25	32	28	26	24	24
1.00	37	33	31	28	37	33	30	28	36	32	30	28	34	32	30	28	27
1.25	40	36	34	32	39	36	34	32	38	35	33	32	37	35	33	31	30
1.50	42	39	36	34	41	38	36	34	40	37	36	34	39	37	35	34	33
2.00	44	42	40	38	43	41	39	38	42	40	39	38	41	40	38	37	36
2.50	45	43	42	40	45	43	41	40	44	42	41	40	43	41	40	39	38
3.00	46	45	43	42	46	44	43	42	44	43	42	41	43	42	41	41	40
4.00	47	46	45	44	46	45	44	43	45	44	44	43	44	44	43	42	41
5.00	48	47	46	45	47	46	45	44	46	45	44	44	45	44	44	43	42
7.00	48	47	47	46	48	47	46	46	47	46	45	45	45	45	45	44	43
10.00	49	48	47	47	48	47	47	46	47	46	46	46	46	46	45	45	44