


屋内照明器具特性




| | | | |
|----|-----------|----|-----|
| 品名 | DF-3050 | | |
| 光源 | FHT42EX-L | | |
| 光束 | 3200 Lm | 灯数 | 1 灯 |



配光曲線図

cd/1000lm

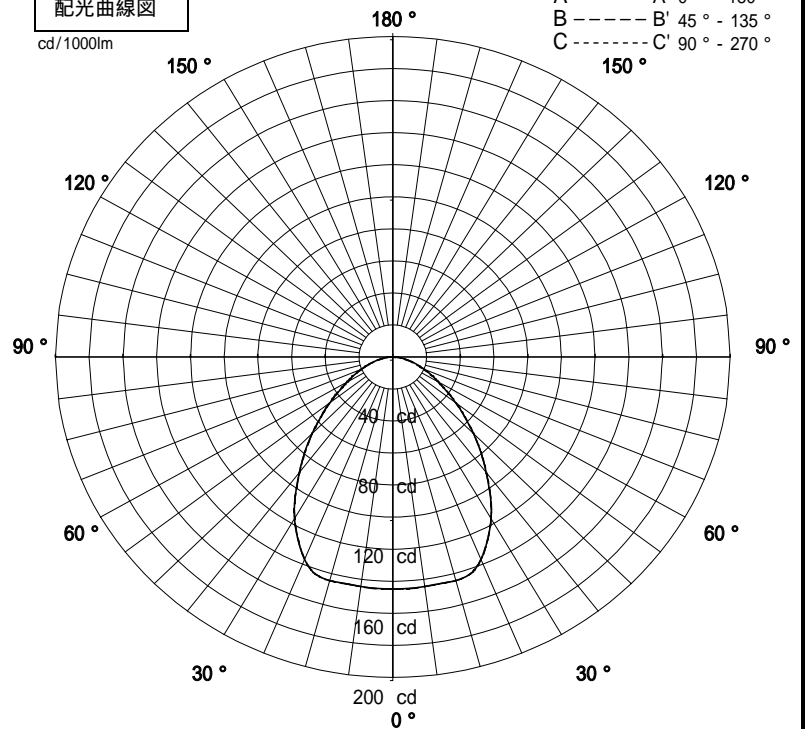


1/2照度角

直射水平面照度

単位:Lx

| | | |
|--------|------|------|
| 器具効率 | 30.6 | % |
| 上方効率 | 0.0 | % |
| 下方効率 | 30.6 | % |
| 保守率 | 良 | 0.74 |
| | 中 | 0.7 |
| | 否 | 0.61 |
| 1/2照度角 | | |
| A - A' | 61.5 | Deg |
| C - C' | 61.5 | Deg |
| 最大取付間隔 | | |
| A - A' | 1.19 | H |
| C - C' | 1.19 | H |

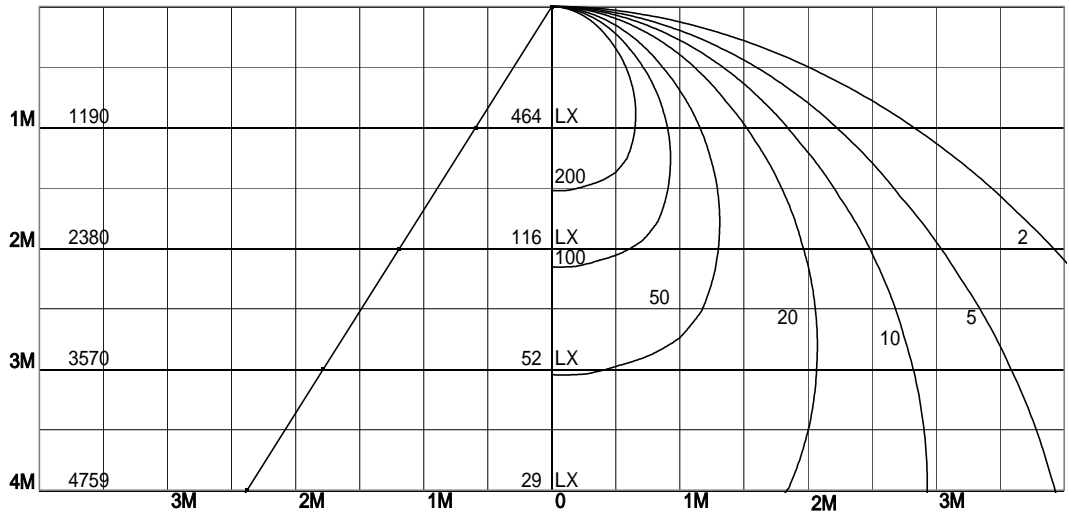

照明率表

| | 80% | | | | 70% | | | | 50% | | | | 30% | | | | 0% |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|
| | 70% | 50% | 30% | 10% | 70% | 50% | 30% | 10% | 70% | 50% | 30% | 10% | 70% | 50% | 30% | 10% | 0% |
| 天井 | | | | | | | | | | | | | | | | | |
| 壁 | | | | | | | | | | | | | | | | | |
| 床 | | | | | | | | | | | | | | | | | |
| 0.60 | 19 | 16 | 14 | 13 | 19 | 16 | 14 | 13 | 18 | 16 | 14 | 12 | 18 | 15 | 14 | 12 | 12 |
| 0.80 | 22 | 19 | 17 | 15 | 21 | 19 | 17 | 15 | 21 | 18 | 16 | 15 | 20 | 18 | 16 | 15 | 14 |
| 1.00 | 24 | 21 | 19 | 17 | 23 | 21 | 19 | 17 | 23 | 20 | 19 | 17 | 22 | 20 | 18 | 17 | 17 |
| 1.25 | 25 | 23 | 21 | 20 | 25 | 23 | 21 | 20 | 24 | 22 | 21 | 19 | 23 | 22 | 20 | 19 | 19 |
| 1.50 | 27 | 24 | 23 | 21 | 26 | 24 | 22 | 21 | 25 | 24 | 22 | 21 | 25 | 23 | 22 | 21 | 20 |
| 2.00 | 28 | 26 | 25 | 24 | 28 | 26 | 25 | 24 | 27 | 26 | 24 | 23 | 26 | 25 | 24 | 23 | 22 |
| 2.50 | 29 | 28 | 26 | 25 | 29 | 27 | 26 | 25 | 28 | 27 | 26 | 25 | 27 | 26 | 25 | 25 | 24 |
| 3.00 | 30 | 29 | 27 | 27 | 29 | 28 | 27 | 26 | 29 | 28 | 27 | 26 | 28 | 27 | 26 | 26 | 25 |
| 4.00 | 31 | 30 | 29 | 28 | 30 | 29 | 28 | 28 | 29 | 29 | 28 | 27 | 29 | 28 | 27 | 27 | 26 |
| 5.00 | 31 | 30 | 29 | 29 | 31 | 30 | 29 | 29 | 30 | 29 | 29 | 28 | 29 | 29 | 28 | 28 | 27 |
| 7.00 | 32 | 31 | 30 | 30 | 31 | 31 | 30 | 30 | 30 | 30 | 30 | 29 | 30 | 29 | 29 | 29 | 28 |
| 10.00 | 32 | 31 | 31 | 31 | 31 | 31 | 31 | 30 | 31 | 30 | 30 | 30 | 30 | 30 | 30 | 29 | 28 |