


屋内照明器具特性




品名	DF-3052		
光源	FHT32EX-L		
光束	2400 Lm	灯数	1 灯



配光曲線図

cd/1000lm

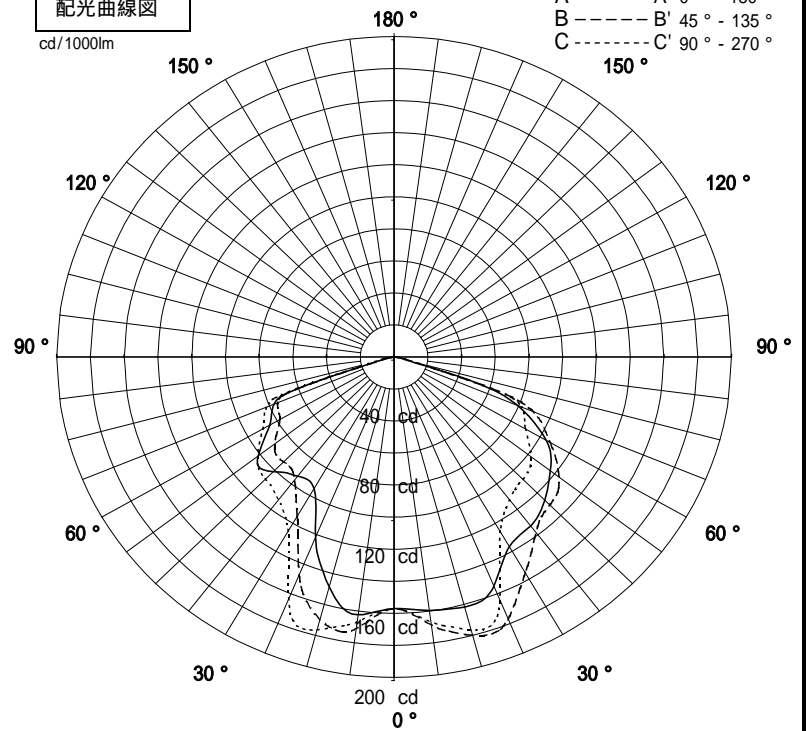


1/2照度角

直射水平面照度

単位:Lx

器具効率	50.8	%
上方効率	0.0	%
下方効率	50.8	%
保守率	良	0.74
	中	0.7
	否	0.61
1/2照度角		
A - A'	58.5	Deg
C - C'	62.0	Deg
最大取付間隔		
A - A'	1.12	H
C - C'	1.20	H

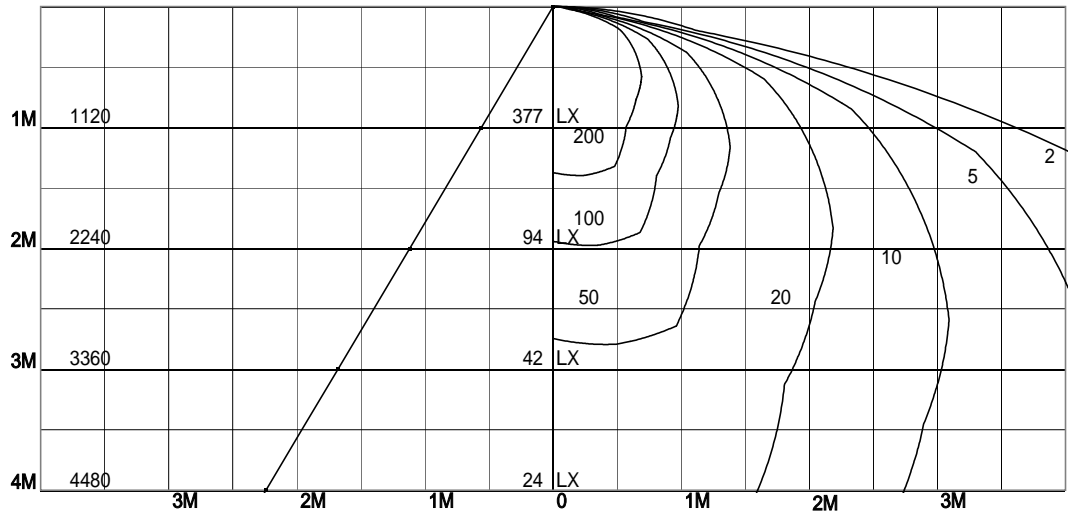

照明率表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁	10%																0%
床	10%																0%
0.60	28	21	17	15	27	21	17	15	26	21	17	14	25	20	17	14	13
0.80	32	26	22	19	31	26	22	19	30	25	21	19	29	24	21	19	18
1.00	36	30	26	23	35	30	26	23	33	29	25	23	32	28	25	22	21
1.25	39	34	30	27	38	33	30	27	36	32	29	26	35	31	29	26	25
1.50	41	36	33	30	40	36	33	30	39	35	32	30	37	34	31	29	28
2.00	44	41	38	35	44	40	37	35	42	39	37	34	41	38	36	34	33
2.50	47	43	41	38	46	43	40	38	44	42	40	38	43	41	39	37	36
3.00	48	45	43	41	47	45	43	41	46	44	42	40	44	43	41	40	38
4.00	50	48	46	44	49	47	45	44	48	46	44	43	46	45	44	43	41
5.00	51	49	48	46	50	48	47	46	49	47	46	45	47	46	45	44	43
7.00	52	51	50	49	51	50	49	48	50	49	48	47	49	48	47	47	45
10.00	53	52	51	51	52	51	51	50	51	50	50	49	50	49	49	48	47