


屋内照明器具特性




品名	DF-3053		
光源	FHT32EX-L		
光束	2400 Lm	灯数	1 灯



配光曲線図

cd/1000lm

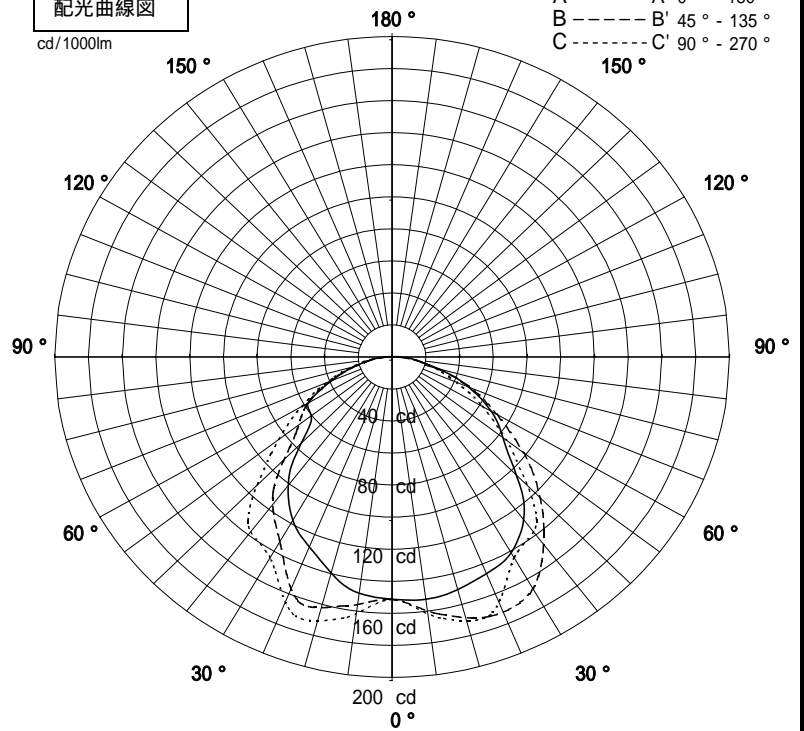


1/2照度角

直射水平面照度

単位:Lx

器具効率	45.5	%
上方効率	0.2	%
下方効率	45.3	%
保守率	良	0.74
	中	0.7
	否	0.61
1/2照度角		
A - A'	64.5	Deg
C - C'	70.5	Deg
最大取付間隔		
A - A'	1.26	H
C - C'	1.41	H

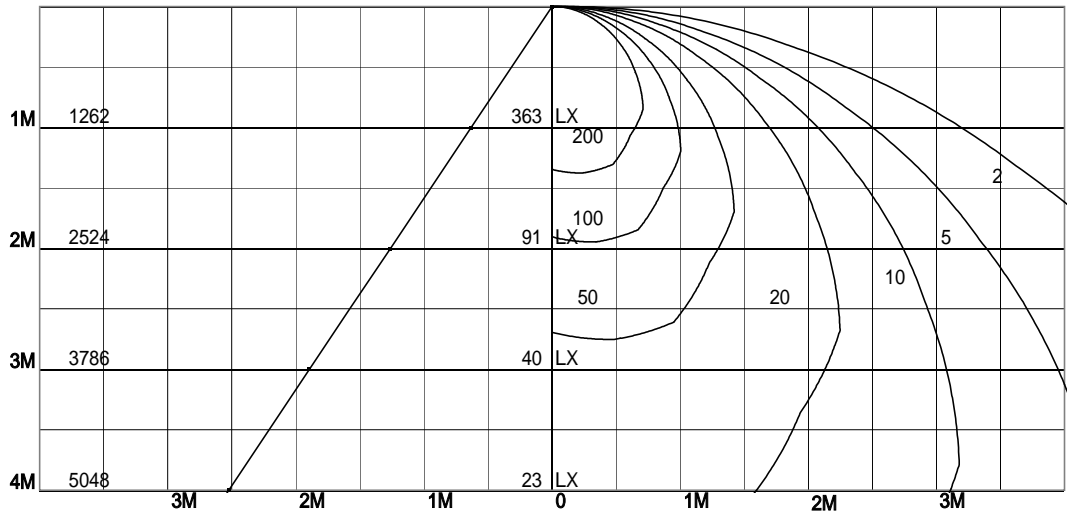

照明率表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁	10%																
床	10%																
0.60	27	21	18	15	26	21	18	15	25	21	18	15	24	20	17	15	14
0.80	31	25	22	19	30	25	22	19	29	25	22	19	28	24	21	19	18
1.00	34	29	25	23	33	28	25	23	32	28	25	23	30	27	25	23	22
1.25	36	32	29	26	35	32	29	26	34	31	28	26	33	30	28	26	25
1.50	38	34	31	29	37	34	31	29	36	33	30	28	35	32	30	28	27
2.00	41	38	35	33	40	37	35	33	39	36	34	32	37	35	34	32	31
2.50	42	40	38	36	42	39	37	35	40	38	37	35	39	37	36	35	33
3.00	43	41	39	38	43	41	39	37	42	40	38	37	40	39	38	36	35
4.00	45	43	41	40	44	43	41	40	43	42	40	39	42	41	40	39	37
5.00	46	44	43	42	45	44	42	41	44	43	42	41	43	42	41	40	39
7.00	46	45	44	43	46	45	44	43	45	44	43	42	44	43	42	42	40
10.00	47	46	46	45	47	46	45	44	45	45	44	44	44	44	43	43	42