


# 屋内照明器具特性




品名	DF-3057		
光源	FHT42EX-L		
光束	3200 Lm	灯数	1 灯



配光曲線図

cd/1000lm

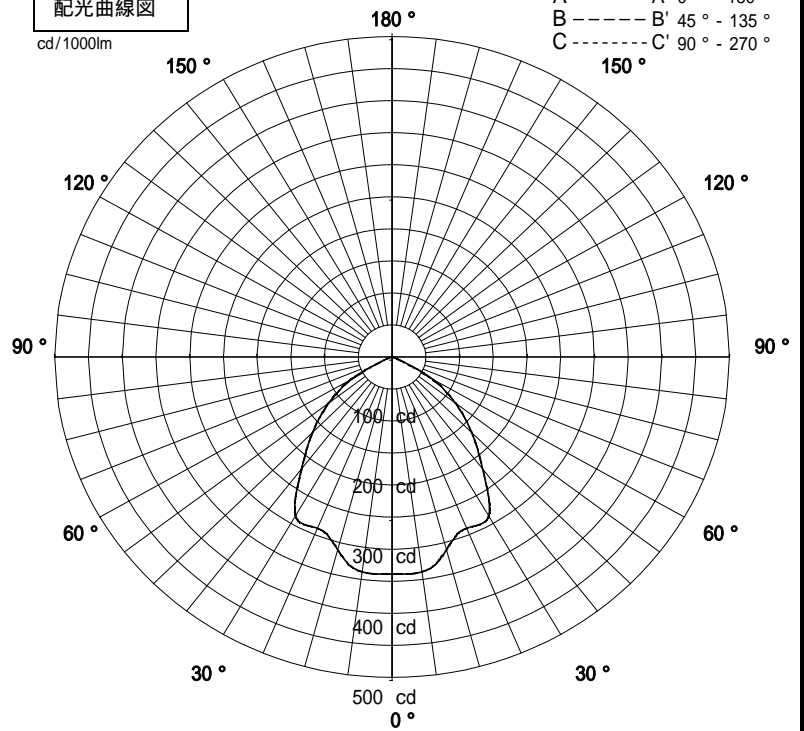


1/2照度角

直射水平面照度

単位:Lx

器具効率	66.9	%
上方効率	0.0	%
下方効率	66.9	%
保守率	良	0.74
	中	0.7
	否	0.61
1/2照度角		
A - A'	63.0	Deg
C - C'	63.0	Deg
最大取付間隔		
A - A'	1.23	H
C - C'	1.23	H

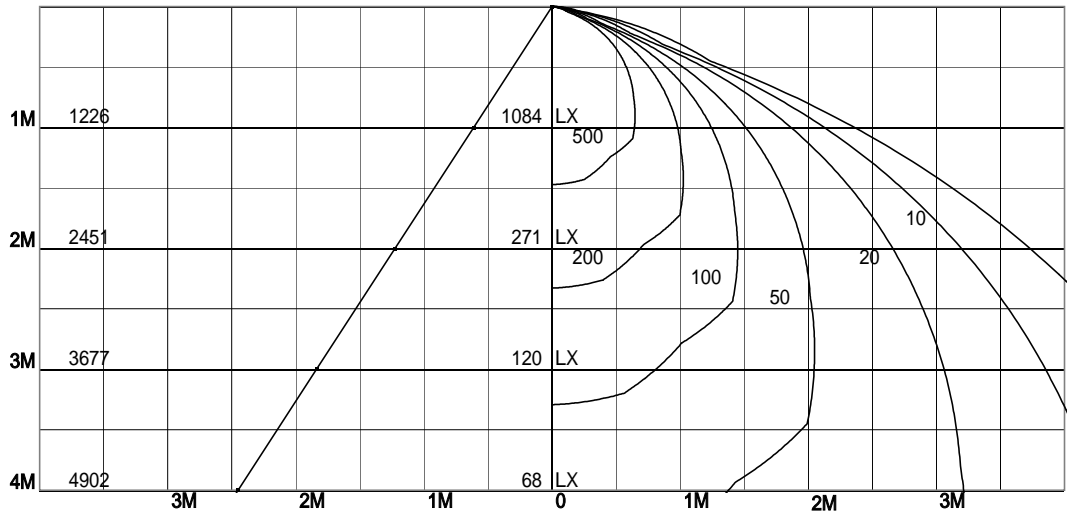

照明率表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁	10%				10%				10%				10%				0%
床	10%																0%
0.60	44	37	32	29	43	37	32	29	42	36	32	29	40	35	32	29	28
0.80	50	43	39	36	49	43	39	36	47	42	38	36	46	41	38	36	34
1.00	54	49	44	41	53	48	44	41	52	47	44	41	50	46	43	41	39
1.25	58	53	49	46	57	53	49	46	56	52	48	46	54	51	48	46	44
1.50	61	56	53	50	60	56	52	50	58	55	52	49	56	54	51	49	48
2.00	64	61	58	56	63	60	58	55	62	59	57	55	60	58	56	54	53
2.50	66	63	61	59	65	63	61	59	64	62	60	58	62	60	59	57	56
3.00	67	65	63	61	67	65	63	61	65	63	62	60	64	62	61	60	58
4.00	69	67	66	64	68	66	65	64	66	65	64	63	65	64	63	62	60
5.00	70	68	67	66	69	68	66	65	67	66	65	64	66	65	64	63	62
7.00	71	70	68	68	70	69	68	67	68	67	67	66	67	66	65	65	63
10.00	71	70	70	69	70	70	69	68	69	68	68	67	67	67	66	66	64