


屋内照明器具特性




品名	DF-3060		
光源	FHT42WEX-L		
光束	3200 Lm	灯数	1 灯



配光曲線図

cd/1000lm

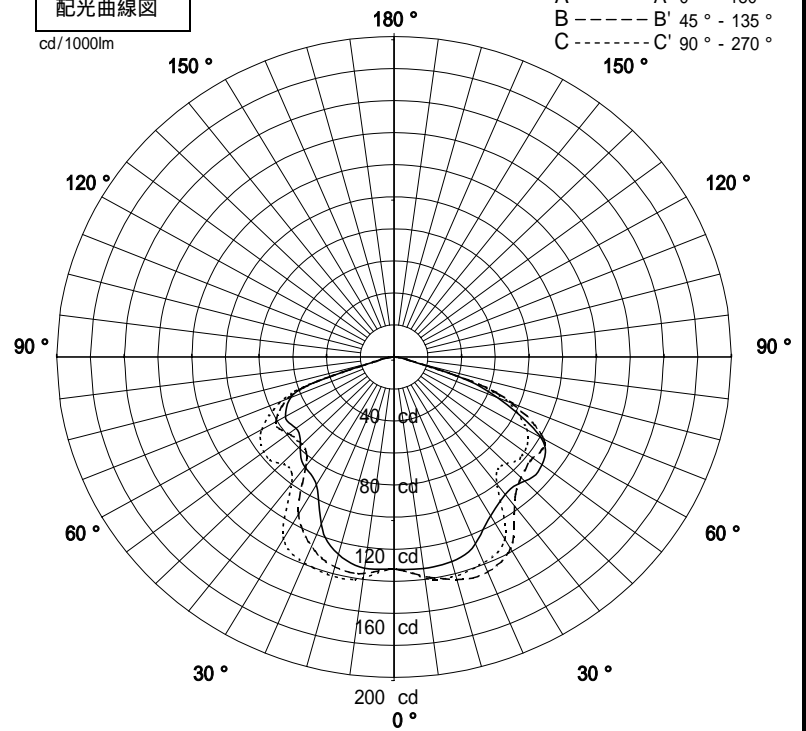


1/2照度角

直射水平面照度

単位:Lx

器具効率	44.9	%
上方効率	0.0	%
下方効率	44.9	%
保守率	良	0.74
	中	0.7
	否	0.61
1/2照度角		
A - A'	60.5	Deg
C - C'	68.0	Deg
最大取付間隔		
A - A'	1.17	H
C - C'	1.35	H

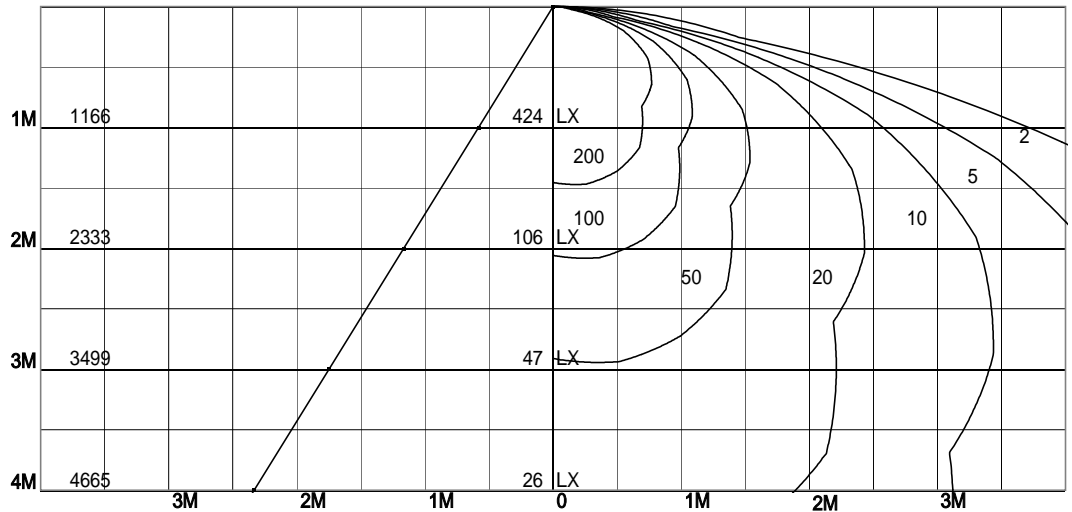

照明率表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁	10%				10%				10%				10%				0%
床	10%																0%
0.60	25	19	16	13	24	19	15	13	23	18	15	13	22	18	15	13	12
0.80	29	23	20	17	28	23	19	17	27	22	19	17	26	22	19	17	16
1.00	32	27	23	20	31	26	23	20	30	26	22	20	28	25	22	20	19
1.25	35	30	27	24	34	30	26	24	32	29	26	24	31	28	25	23	22
1.50	37	33	29	27	36	32	29	27	34	31	28	26	33	30	28	26	25
2.00	40	36	33	31	39	36	33	31	37	35	33	31	36	34	32	30	29
2.50	41	39	36	34	41	38	36	34	39	37	35	34	38	36	35	33	32
3.00	43	40	38	36	42	40	38	36	41	39	37	36	40	38	37	35	34
4.00	44	42	41	39	44	42	40	39	42	41	40	38	41	40	39	38	37
5.00	45	44	42	41	45	43	42	41	43	42	41	40	42	41	40	40	38
7.00	46	45	44	43	46	45	44	43	45	44	43	42	43	43	42	42	40
10.00	47	46	46	45	46	46	45	45	45	45	44	44	44	44	43	43	42