


屋内照明器具特性




品名	DD-3292-N		
光源	LED 60W × 1		
実効光束 (器具光束)	4637lm	効率	77.3lm/W

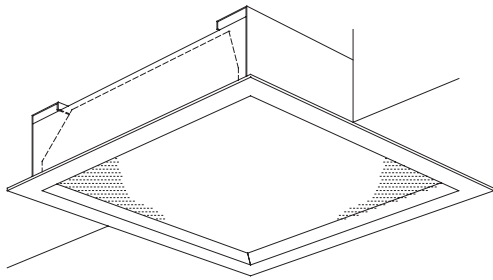

配光曲線図

実光度

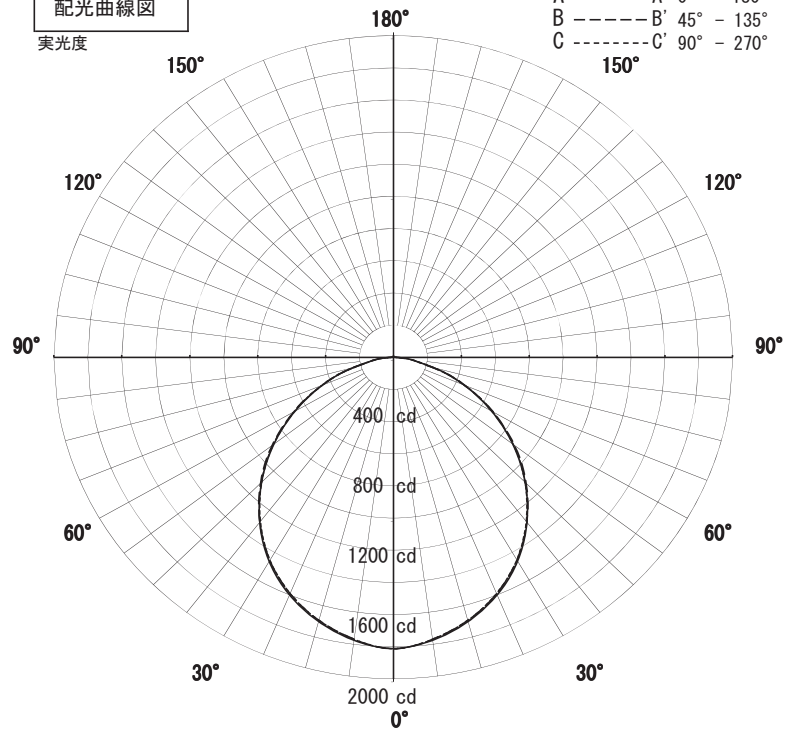

A ——— A' 0° - 180°
 B - - - - B' 45° - 135°
 C - - - - C' 90° - 270°


1/2照度角

直射水平面照度

単位：Lx

色温度	5000K	
演色評価指数	Ra70	
保守率	良	0.8
	中	0.6
	否	0.54

1/2照度角		
A - A'	62.0	Deg
C - C'	62.0	Deg
最大取付間隔		
A - A'	1.20	H
C - C'	1.20	H

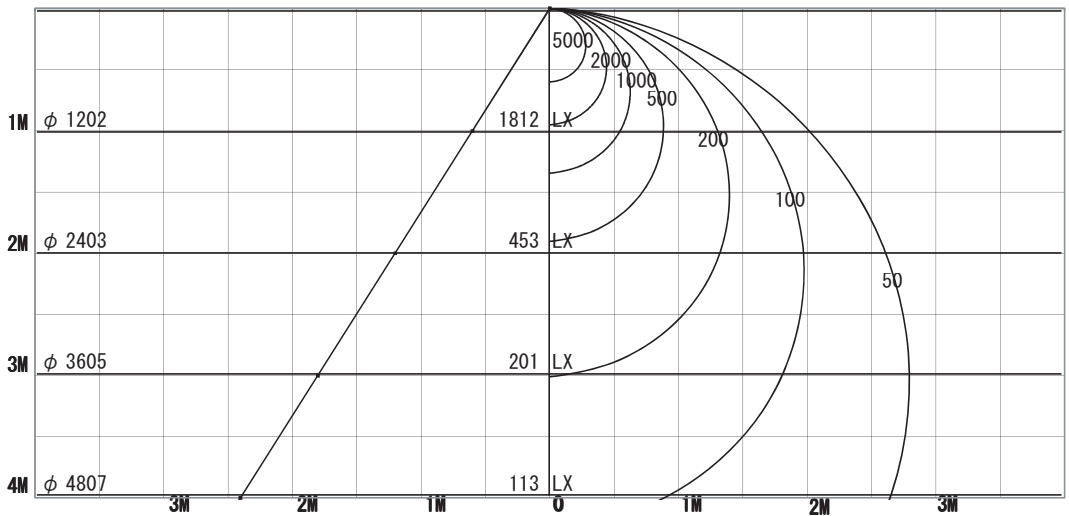

照 明 率 表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁	10%																0%
床	10%																0%
0.60	59	47	39	34	57	46	39	34	55	45	39	34	53	44	38	34	32
0.80	68	56	49	43	66	56	48	43	64	54	48	43	61	53	47	43	41
1.00	74	64	57	51	73	63	56	51	70	62	55	50	67	60	55	50	48
1.25	80	71	64	59	79	70	64	58	76	68	63	58	73	67	62	57	55
1.50	85	76	70	64	83	75	69	64	80	73	68	64	77	72	67	63	61
2.00	91	84	78	74	89	83	78	73	86	81	76	72	83	79	75	72	69
2.50	94	89	84	80	93	87	83	79	90	85	82	78	87	83	80	77	75
3.00	97	92	88	84	95	91	87	83	92	89	85	82	90	87	84	81	79
4.00	100	96	92	89	98	95	92	89	95	93	90	87	93	90	88	86	84
5.00	101	98	95	93	100	97	94	92	97	95	93	91	95	93	91	89	87
7.00	103	101	99	97	102	100	98	96	99	98	96	94	97	96	94	93	90
10.00	105	103	101	100	103	102	100	99	101	100	98	97	99	97	96	96	93