

品名

DD-3316-N

光源

LED_7.2W

実効光束
(器具光束)

485lm


効率


67.4lm/W

配光曲線図

cd/1000lm

A ——— A' 0° - 180°
B - - - - - B' 45° - 135°
C - - - - - C' 90° - 270°

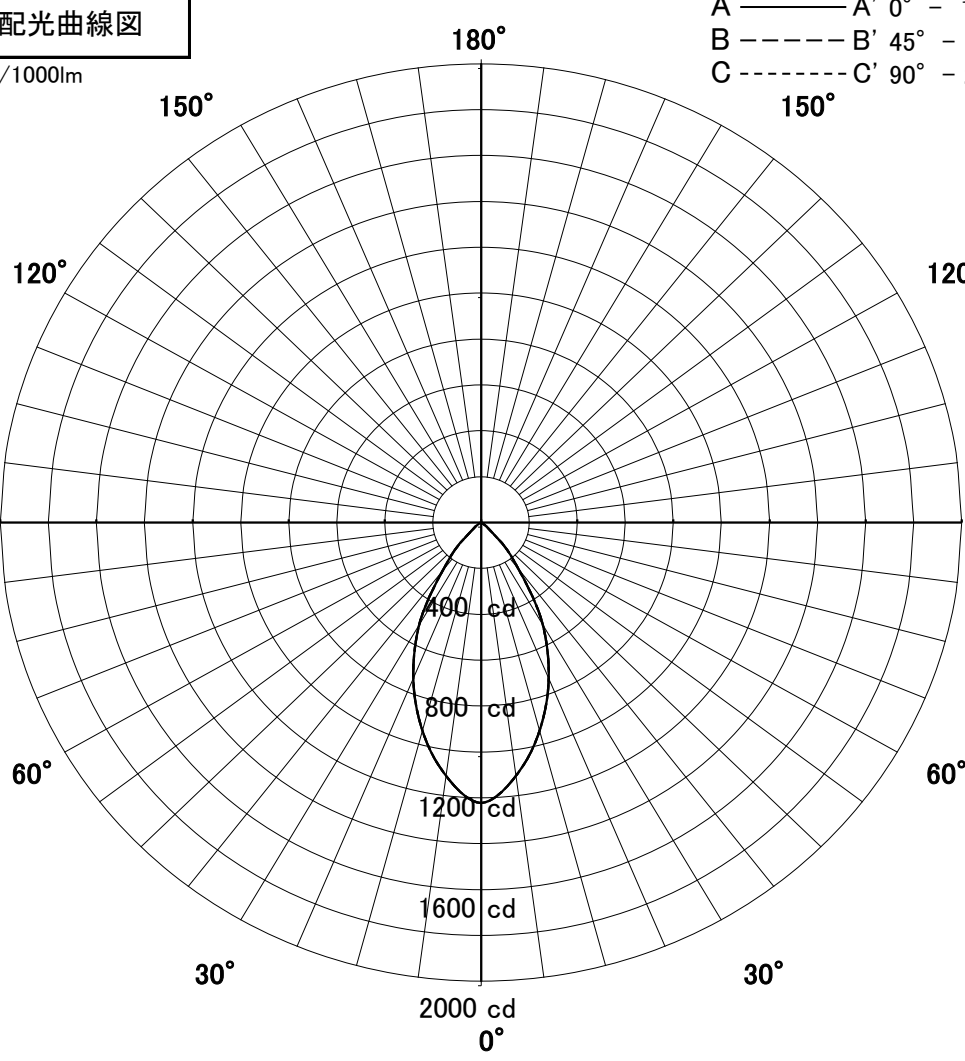

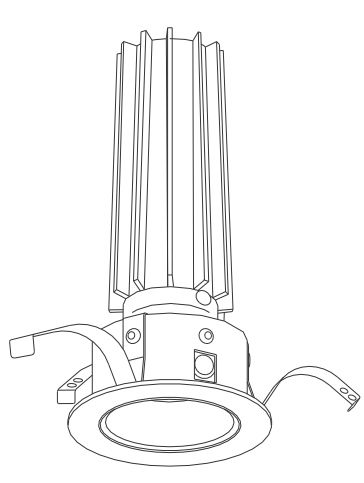

1/2照度角

直射水平面照度

単位:Lx

色温度

5000K

演色評価指数

Ra70

保守率

良

0.8

保守率

中

0.6

保守率

否

0.54

1/2照度角


A-A' 43.5 Deg

C-C' 43.5 Deg

最大取付間隔

A-A' 0.80 H

C-C' 0.80 H

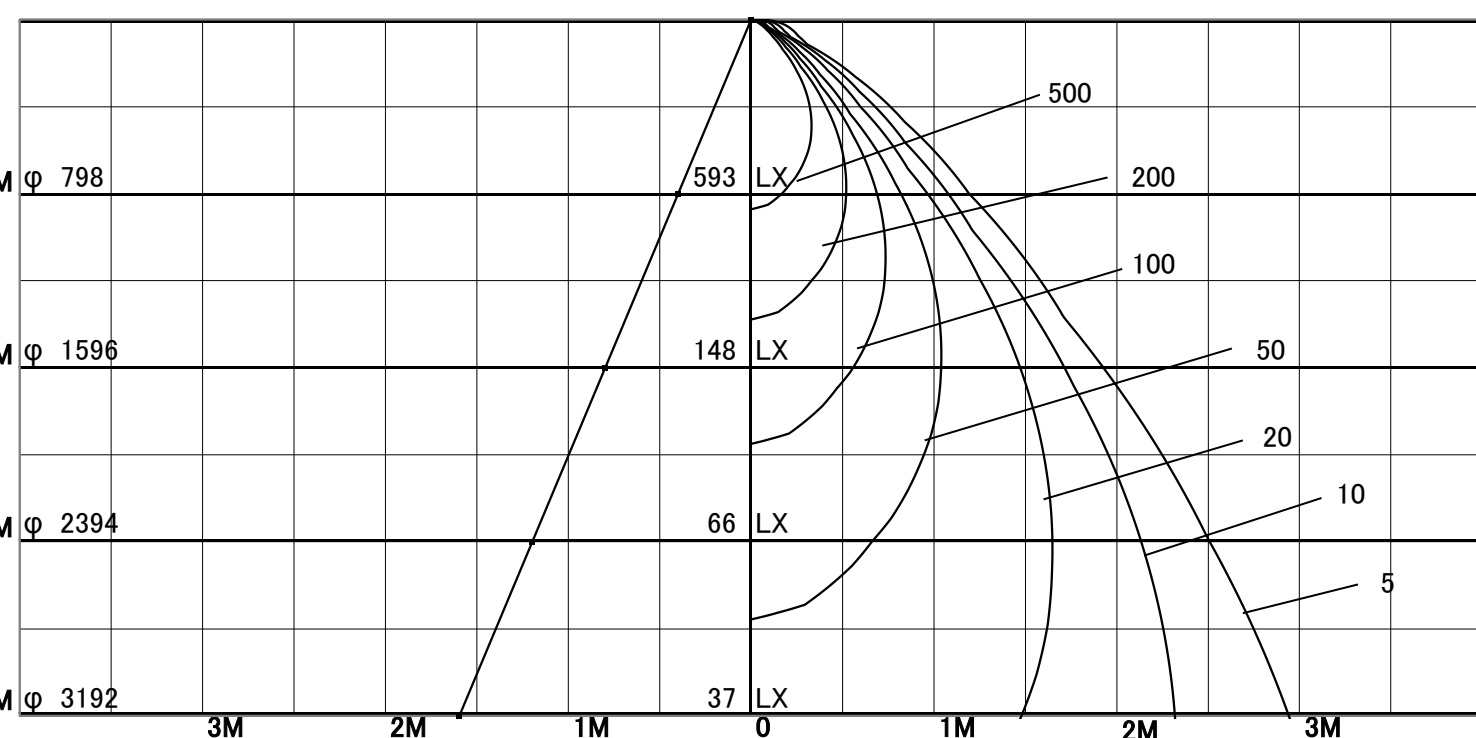

照 明 率 表

天井	80%				70%				50%				30%				0%
壁	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
床	10%				10%				10%				10%				0%
0.60	75	68	64	61	74	68	64	61	73	67	64	61	71	67	63	61	60
0.80	80	74	70	67	80	74	70	67	78	73	70	67	76	72	69	67	65
1.00	85	80	76	73	84	79	75	73	82	78	75	72	81	77	74	72	71
1.25	88	84	80	78	87	83	80	77	86	82	79	77	84	81	78	76	75
1.50	91	87	84	81	90	86	83	81	88	85	82	80	86	84	81	80	78
2.00	94	91	89	87	93	90	88	86	91	89	87	85	90	88	86	85	83
2.50	96	94	92	90	95	93	91	90	93	92	90	89	92	90	89	88	86
3.00	98	96	94	93	97	95	93	92	95	93	92	91	93	92	91	90	88
4.00	99	97	96	95	98	97	95	94	96	95	94	93	94	93	93	92	90
5.00	99	98	97	97	98	98	97	96	97	96	95	94	95	94	94	93	91
7.00	100	100	99	98	99	99	98	98	97	97	97	96	96	95	95	95	92
10.00	101	100	100	100	100	99	99	99	98	98	97	97	96	96	96	95	93

天井	80%				70%				50%				30%				0%
壁	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
床	10%				10%				10%				10%				0%
0.60	75	68	64	61	74	68	64	61	73	67	64	61	71	67	63	61	60
0.80	80	74	70	67	80	74	70	67	78	73	70	67	76	72	69	67	65
1.00	85	80	76	73	84	79	75	73	82	78	75	72	81	77	74	72	71
1.25	88	84	80	78	87	83	80	77	86	82	79	77	84	81	78	76	75
1.50	91	87	84	81	90	86	83	81	88	85	82	80	86	84	81	80	78
2.00	94	91	89	87	93	90	88	86	91	89	87	85	90	88	86	85	83
2.50	96	94	92	90	95	93	91	90	93	92	90	89	92	90	89	88	86
3.00	98	96	94	93	97	95	93	92	95	93	92	91	93	92	91	90	88
4.00	99	97	96	95	98	97	95	94	96	95	94	93	94	93	93	92	90
5.00	99	98	97	97	98	98	97	96	97	96	95	94	95	94	94	93	91
7.00	100	100	99	98	99	99	98	98	97	97	97	96	96	95	95	95	92
10.00	101	100	100	100	100	99	99	99	98	98	97	97	96	96	96	95	93