


# 屋内照明器具特性




品名	DD-3560-W		
光源	LED51W		
実効光束 (器具光束)	4113lm	効率	80.6lm/W

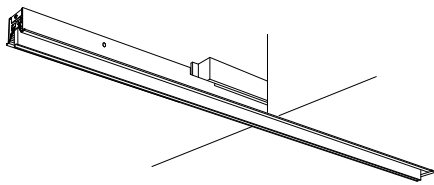

配光曲線図

実光度

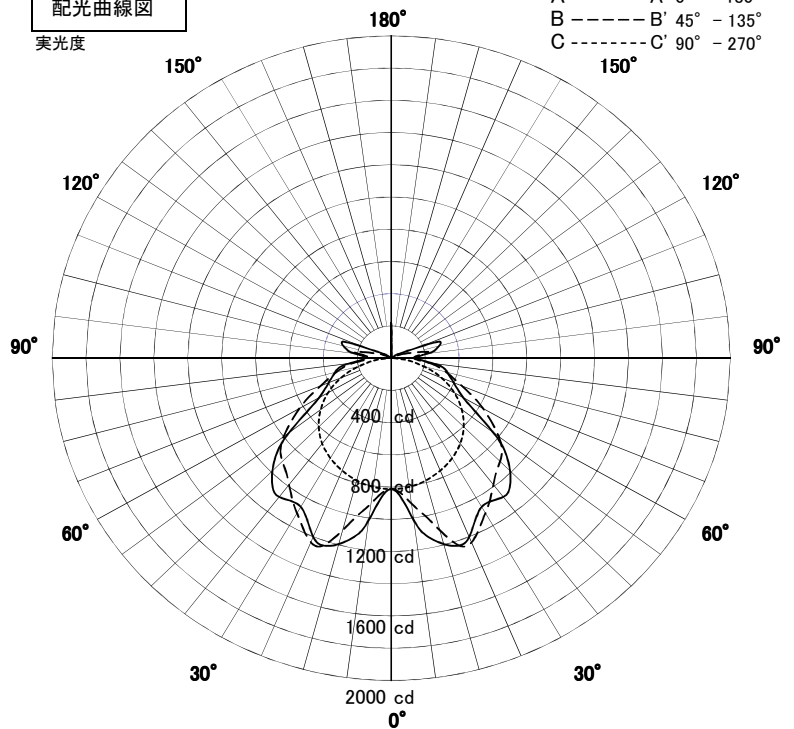


直射水平面照度

单位:Lx

A-A' Section

C-C' Section

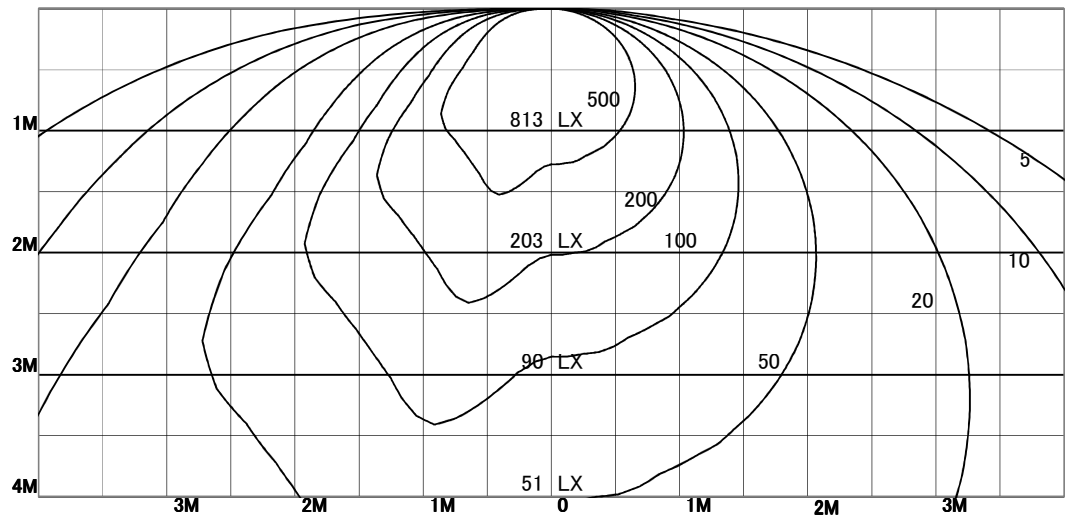

色温度	4000K	
演色評価指数	Ra83	
保守率	良	0.63
	中	0.60
	否	0.56
1/2照度角		
A-A'	86.5	Deg
C-C'	66.5	Deg
最大取付間隔		
A-A'	1.88	H
C-C'	1.31	H

照明率表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁	10%																0%
床	10%																0%
0.60	50	39	31	26	49	38	31	26	46	37	31	26	44	36	30	26	24
0.80	58	47	40	34	57	46	39	34	54	45	39	34	52	44	38	34	32
1.00	64	54	46	41	63	53	46	41	60	51	45	40	57	50	45	40	38
1.25	69	60	53	48	68	59	53	47	65	58	52	47	62	56	51	47	44
1.50	73	65	58	53	72	64	58	53	69	62	57	52	66	60	56	52	49
2.00	79	72	66	61	77	71	65	61	74	69	64	60	72	67	63	59	57
2.50	82	76	71	67	81	75	70	66	78	73	69	65	75	71	68	64	62
3.00	85	79	75	71	83	78	74	70	80	76	72	69	78	74	71	68	66
4.00	88	83	79	76	86	82	79	75	83	80	77	74	81	78	75	73	71
5.00	89	86	82	79	88	85	81	79	85	82	80	77	83	80	78	76	74
7.00	91	89	86	84	90	87	85	83	88	85	83	81	85	83	82	80	77
10.00	93	91	89	87	92	90	88	86	89	88	86	85	87	86	84	83	80