


# 屋内照明器具特性




品名	DD-3644		
光源	LED_122.2W		
実効光束 (器具光束)	11355lm	エネルギー 効率	92.9lm/W

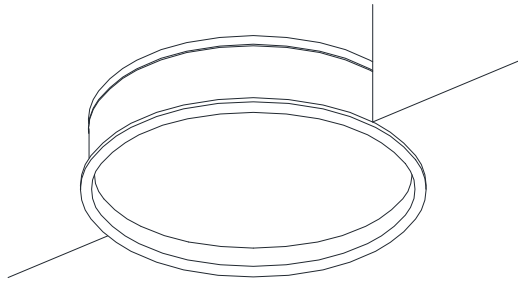

5250K時(2700K:50%点灯、7800K:50%点灯)

配光曲線図

実光度

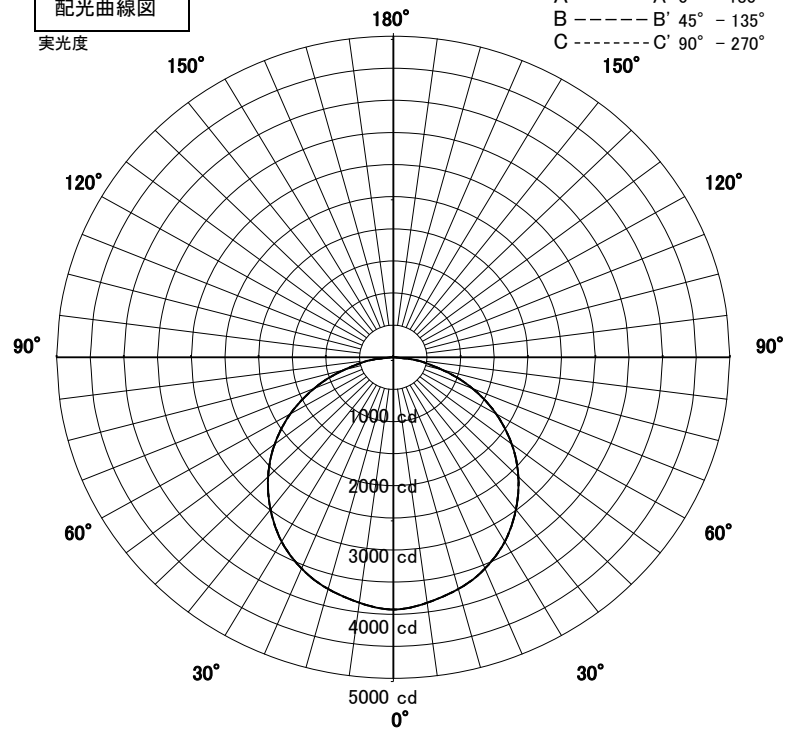


1/2照度角

直射水平面照度

単位:Lx

器具効率	100.0%	
色温度	5250K	
演色評価指数	Ra90	
保守率	良	0.63
	中	0.6
	否	0.56
1/2照度角		
A-A'	64.0	Deg
C-C'	64.0	Deg
最大取付間隔		
A-A'	1.25	H
C-C'	1.25	H

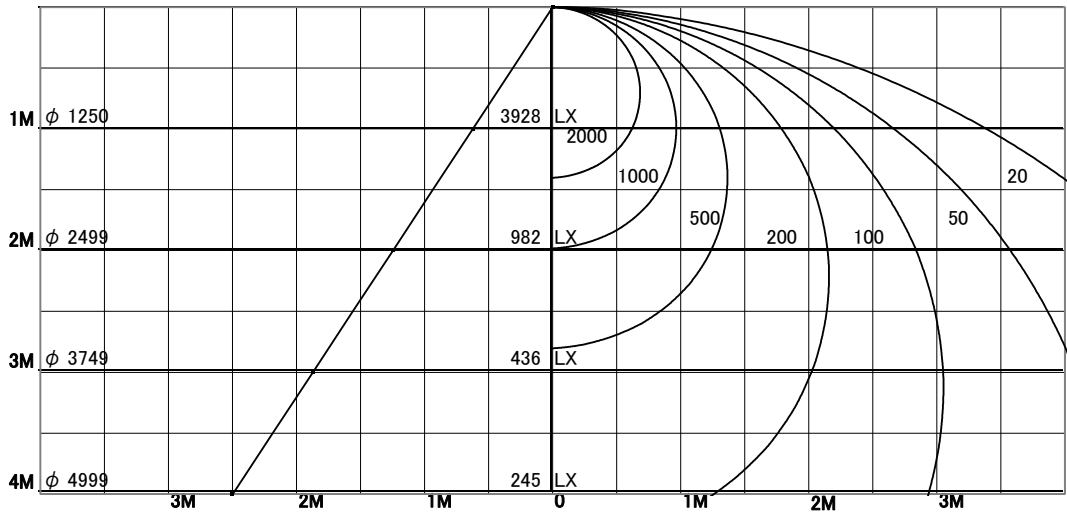

固有照明率表

	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
天井	10%																0%
壁	10%																0%
床	10%																0%
0.60	58	45	38	32	56	45	37	32	54	44	37	32	52	43	36	32	30
0.80	67	55	47	41	65	54	47	41	62	53	46	41	60	51	45	41	38
1.00	73	62	55	49	72	62	54	49	69	60	53	48	66	58	53	48	46
1.25	80	70	62	56	78	69	62	56	75	67	61	56	72	65	60	55	53
1.50	84	75	68	62	82	74	67	62	79	72	66	62	76	70	65	61	59
2.00	90	83	77	72	88	82	76	71	85	80	75	71	82	78	73	70	67
2.50	94	88	82	78	92	87	82	77	89	84	80	77	86	82	79	76	73
3.00	96	91	87	83	95	90	86	82	92	88	84	81	89	86	83	80	77
4.00	99	95	92	88	98	94	91	88	95	92	89	86	93	90	87	85	82
5.00	101	98	95	92	100	97	94	91	97	94	92	90	95	92	90	88	86
7.00	103	101	99	96	102	100	98	96	99	98	96	94	97	95	94	92	90
10.00	105	103	101	100	104	102	100	99	101	100	98	97	99	98	96	95	92