


屋内照明器具特性




品名	PD-2580-L		
光源	PowerLED 2.3W		
光束	290 Lm	灯数	6 灯

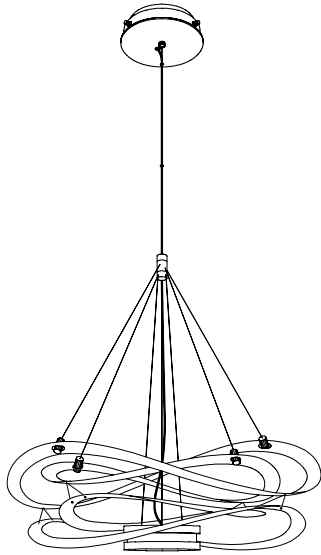

配光曲線図

cd/1000lm

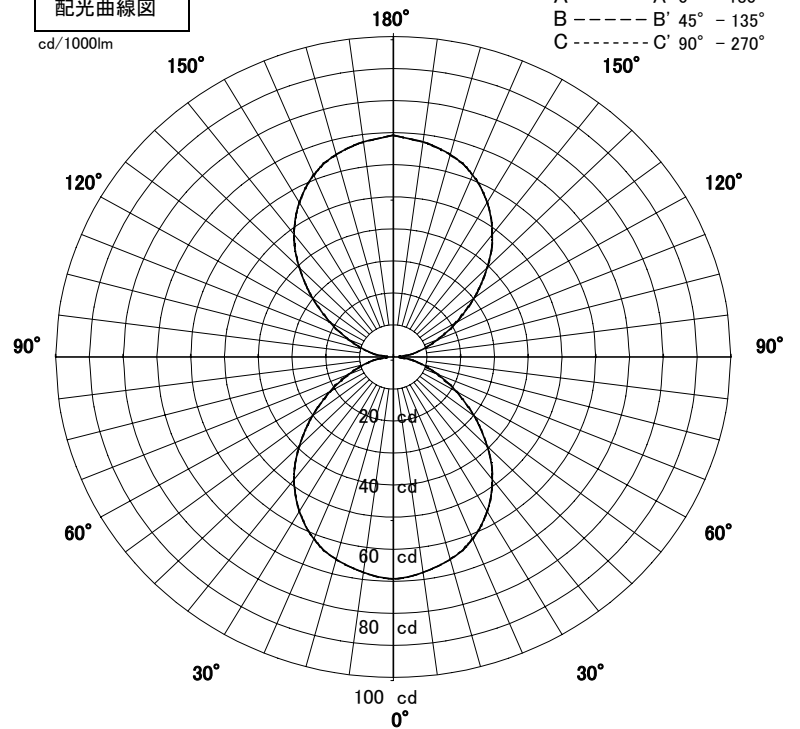


1/2照度角

直射水平面照度

単位:Lx

器具効率	33.8	%
上方効率	17.0	%
下方効率	16.9	%
保守率	良	0.69
	中	0.65
	否	0.61
1/2照度角		
A-A'	62.0	Deg
C-C'	62.0	Deg
最大取付間隔		
A-A'	1.20	H
C-C'	1.20	H

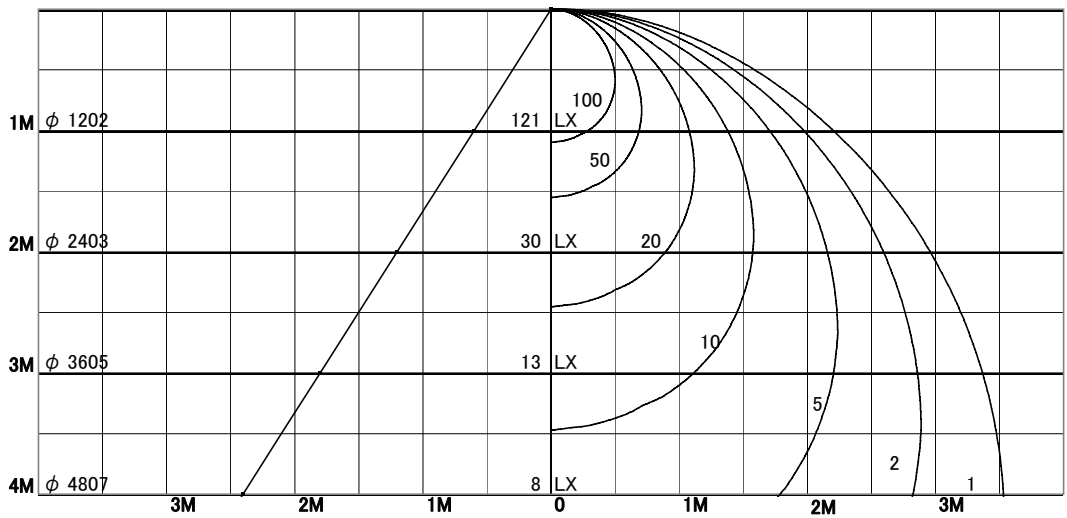

照明率表

	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
天井																	
壁																	
床																	
0.60	10	8	7	6	10	8	7	6	9	8	7	6	9	8	7	6	6
0.80	12	10	8	8	11	10	8	8	11	9	8	7	10	9	8	7	7
1.00	13	11	10	9	12	11	10	9	12	11	10	9	12	10	9	9	8
1.25	14	12	11	10	13	12	11	10	13	12	11	10	12	11	11	10	9
1.50	14	13	12	11	14	13	12	11	14	12	12	11	13	12	11	11	10
2.00	15	14	13	12	15	14	13	12	15	14	13	12	14	13	13	12	12
2.50	16	15	14	13	16	15	14	13	15	14	14	13	15	14	14	13	13
3.00	16	15	15	14	16	15	15	14	16	15	14	14	15	15	14	14	13
4.00	17	16	16	15	17	16	15	15	16	16	15	15	16	15	15	15	14
5.00	17	17	16	16	17	16	16	15	16	16	16	15	16	16	15	15	15
7.00	17	17	17	16	17	17	16	16	17	16	16	16	16	16	16	16	15
10.00	18	17	17	17	17	17	17	17	17	17	17	16	17	16	16	16	16