


屋内照明器具特性




品名	PD-2639-L		
光源	LDF5L-W-GX53/500×3灯		
実効光束 (器具光束)	1489lm	効率	99.2lm/W

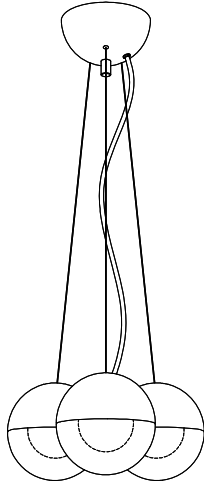

配光曲線図

実光度

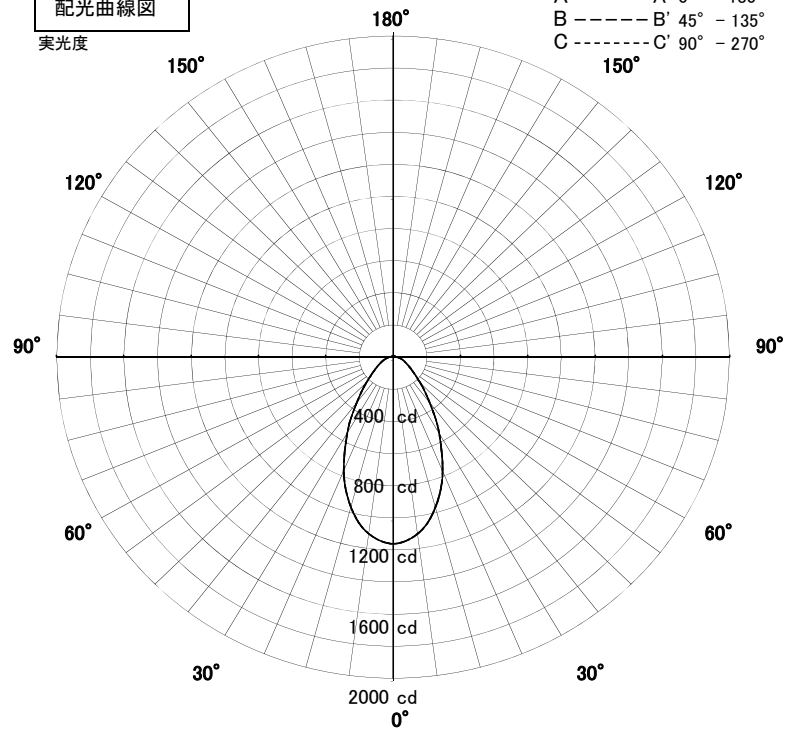


1/2照度角

直射水平面照度

単位:Lx

色温度	2700K	
演色評価指数	Ra83	
保守率	良	0.63
	中	0.6
	否	0.56

1/2照度角		
A-A'	46.5	Deg
C-C'	46.5	Deg
最大取付間隔		
A-A'	0.86	H
C-C'	0.86	H

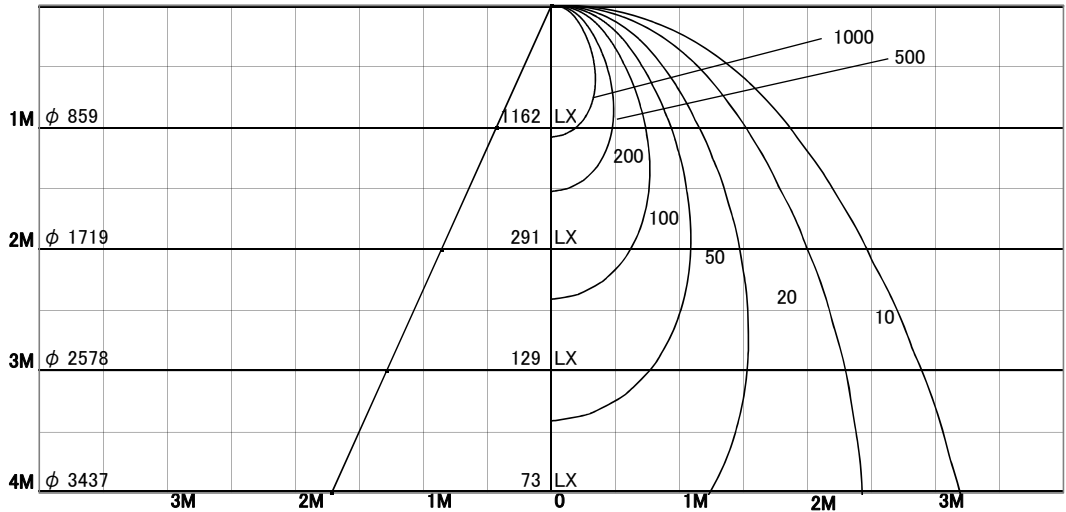

照明率表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁	10%																0%
床	10%																0%
0.60	62	53	48	44	61	53	48	44	59	52	47	44	58	51	47	44	42
0.80	69	61	55	51	68	60	55	51	66	59	54	51	64	58	54	50	49
1.00	74	67	61	57	73	66	61	57	71	65	60	56	69	63	59	56	55
1.25	79	72	67	63	77	71	66	62	75	70	65	62	73	68	65	61	60
1.50	82	75	71	67	80	75	70	67	78	73	69	66	76	72	68	65	64
2.00	86	81	77	74	85	80	76	73	82	79	75	73	80	77	74	72	70
2.50	89	85	81	78	87	84	80	78	85	82	79	77	83	80	78	76	74
3.00	90	87	84	81	89	86	83	81	87	84	82	80	85	83	81	79	77
4.00	92	90	87	85	91	89	87	85	89	87	85	83	87	85	84	82	80
5.00	94	91	89	87	92	90	89	87	90	89	87	85	88	87	85	84	82
7.00	95	93	92	90	94	92	91	90	92	90	89	88	90	89	88	87	84
10.00	96	95	94	93	95	94	93	92	93	92	91	90	91	90	89	89	86