


屋内照明器具特性




品名	PD-2640-L		
光源	LDA5L-G-E17/S/40W		
実効光束 (器具光束)	426lm	効率	81.9lm/W



配光曲線図

実光度

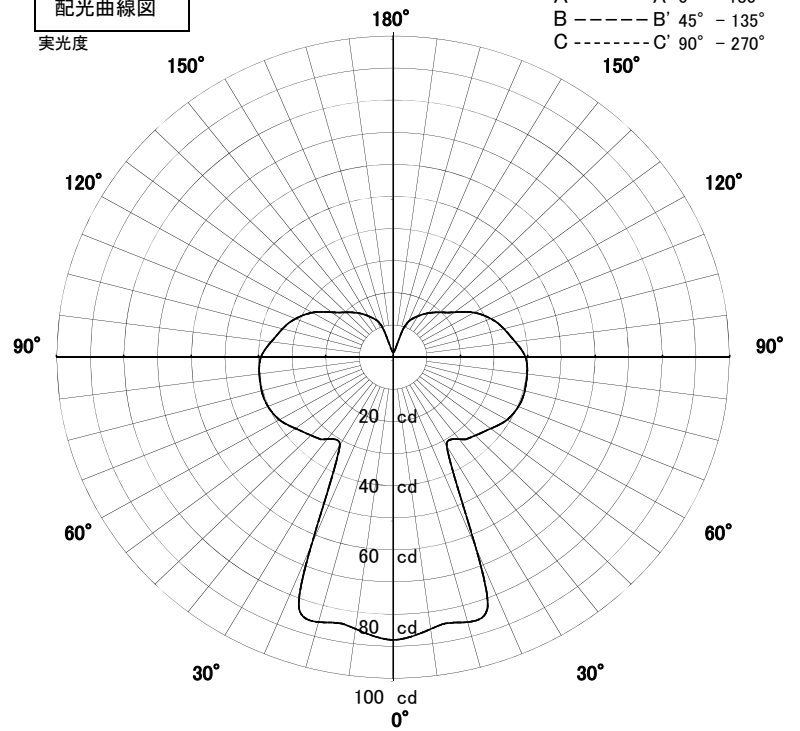


1/2照度角

直射水平面照度

単位: Lx

色温度	2700K	
演色評価指数	Ra80	
保守率	良	0.67
	中	0.63
	否	0.56

1/2照度角		
A-A'	48.5	Deg
C-C'	48.5	Deg
最大取付間隔		
A-A'	0.90	H
C-C'	0.90	H

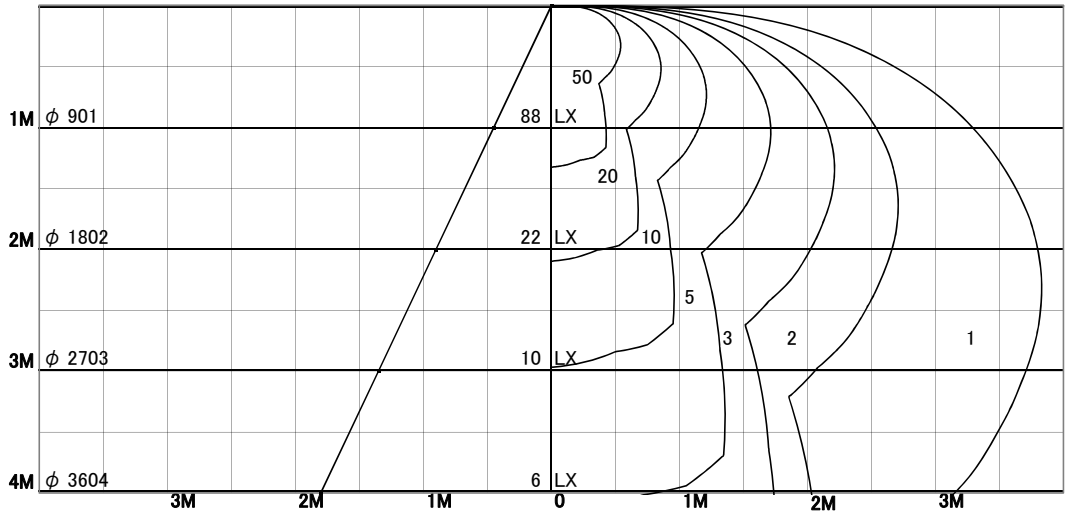

照明率表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁	10%																0%
床	10%																0%
0.60	29	21	15	12	28	20	15	12	26	20	15	12	25	19	15	12	10
0.80	33	25	19	15	32	25	19	15	30	24	19	15	29	23	18	15	13
1.00	37	29	23	19	36	28	23	18	34	27	22	18	32	26	22	18	16
1.25	40	32	27	22	39	32	26	22	37	30	26	22	35	29	25	21	20
1.50	43	35	30	25	41	35	29	25	39	33	28	25	37	32	28	24	22
2.00	46	40	34	30	45	39	34	30	43	38	33	29	41	36	32	29	27
2.50	49	43	38	34	48	42	38	34	45	41	37	33	43	39	36	33	31
3.00	51	45	41	37	49	45	40	36	47	43	39	36	45	41	38	35	33
4.00	53	49	45	41	52	48	44	41	50	46	43	40	48	45	42	39	37
5.00	55	51	47	44	54	50	47	43	51	48	45	43	49	47	44	42	40
7.00	57	54	51	48	56	53	50	47	54	51	49	47	52	50	48	46	44
10.00	58	56	54	51	57	55	53	51	55	53	52	50	54	52	50	49	47