


# 屋内照明器具特性




品名	PD-2656-L		
光源	LDA5L-G-E17/S/40W×9灯		
実効光束 (器具光束)	3516lm	効率	75.1lm/W

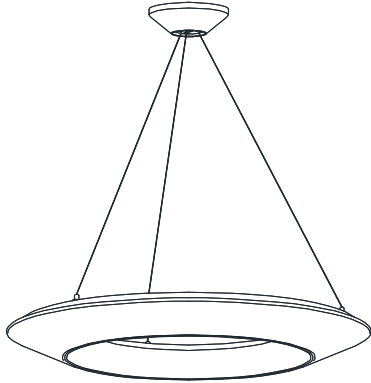

配光曲線図

実光度

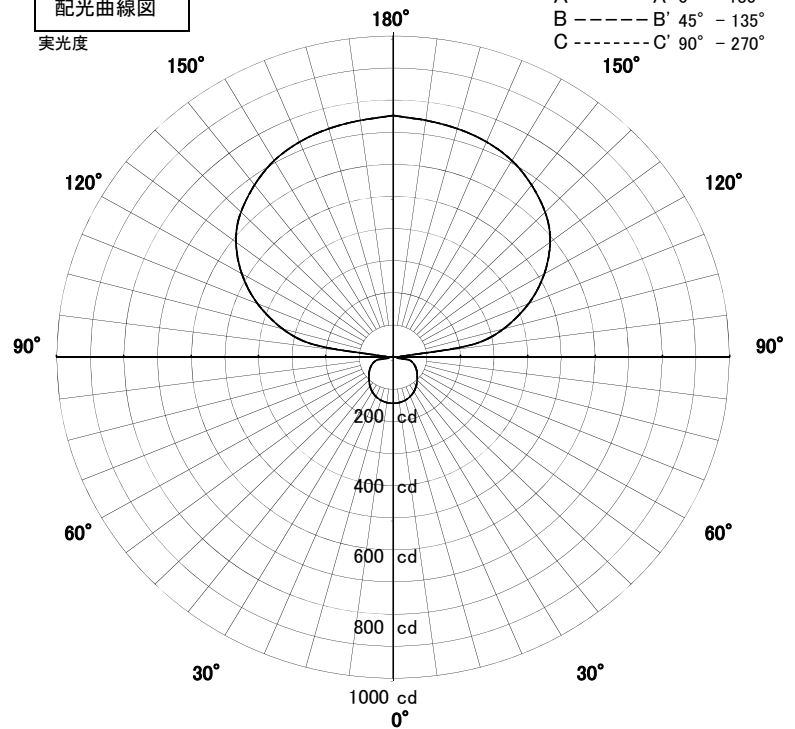


1/2照度角

直射水平面照度

単位:Lx

色温度	2700K	
演色評価指数	Ra80	
保守率	良	0.67
	中	0.63
	否	0.56

1/2照度角		
A-A'	65.5	Deg
C-C'	65.5	Deg
最大取付間隔		
A-A'	1.29	H
C-C'	1.29	H

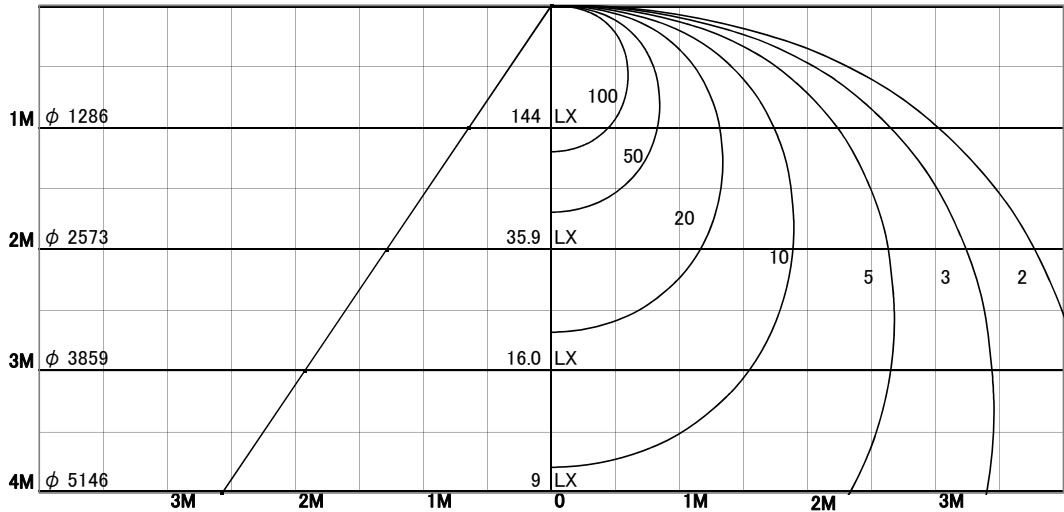

照明率表

	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
天井																	0%
壁																	0%
床																	0%
0.60	8	6	5	4	8	6	5	4	7	6	5	4	7	6	5	4	4
0.80	9	7	6	5	9	7	6	5	8	7	6	5	8	7	6	5	5
1.00	10	8	7	6	10	8	7	6	9	8	7	6	9	8	7	6	6
1.25	11	9	8	7	11	9	8	7	10	9	8	7	10	9	8	7	7
1.50	12	10	9	8	11	10	9	8	11	10	9	8	10	9	8	8	7
2.00	12	11	10	9	12	11	10	9	12	11	10	9	11	10	10	9	9
2.50	13	12	11	10	13	12	11	10	12	11	11	10	12	11	10	10	10
3.00	13	12	12	11	13	12	12	11	13	12	11	11	12	12	11	11	10
4.00	14	13	12	12	14	13	12	12	13	13	12	12	13	12	12	11	11
5.00	14	14	13	12	14	13	13	12	14	13	13	12	13	13	12	12	12
7.00	15	14	14	13	14	14	14	13	14	14	13	13	14	13	13	13	12
10.00	15	15	14	14	15	14	14	14	14	14	14	14	14	14	13	13	13