

屋内照明器具特性




品名	PD-2692-L		
光源	LDR5L-W-E11/D/27/5/30-H2		
実効光束 (器具光束)	346lm	効率	72.0lm/W



配光曲線図

実光度

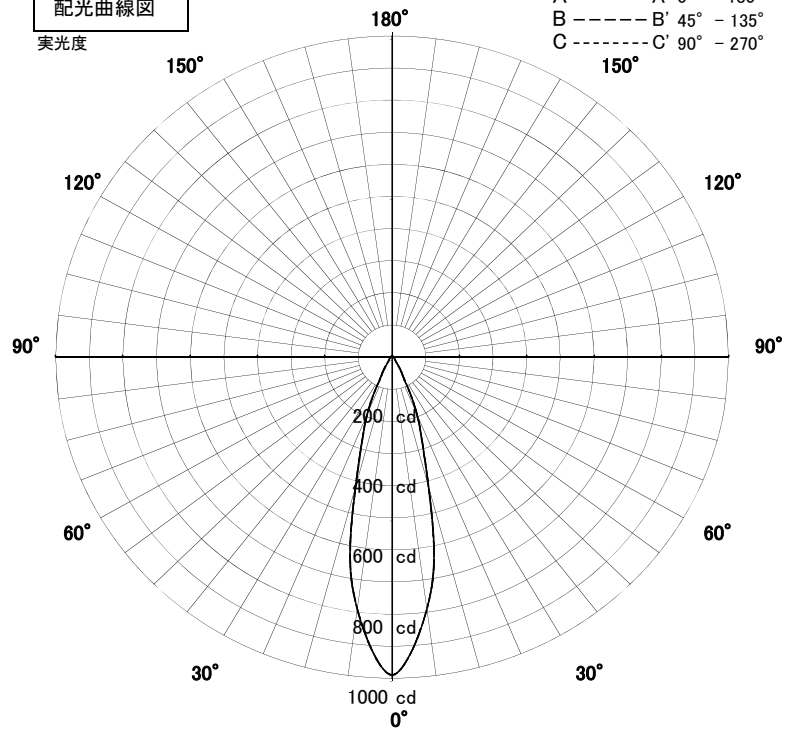


1/2照度角

直射水平面照度

単位:Lx

色温度	2700K	
演色評価指数	Ra85	
保守率	良	0.67
	中	0.63
	否	0.56

1/2照度角		
A-A'	26.5	Deg
C-C'	26.5	Deg
最大取付間隔		
A-A'	0.47	H
C-C'	0.47	H

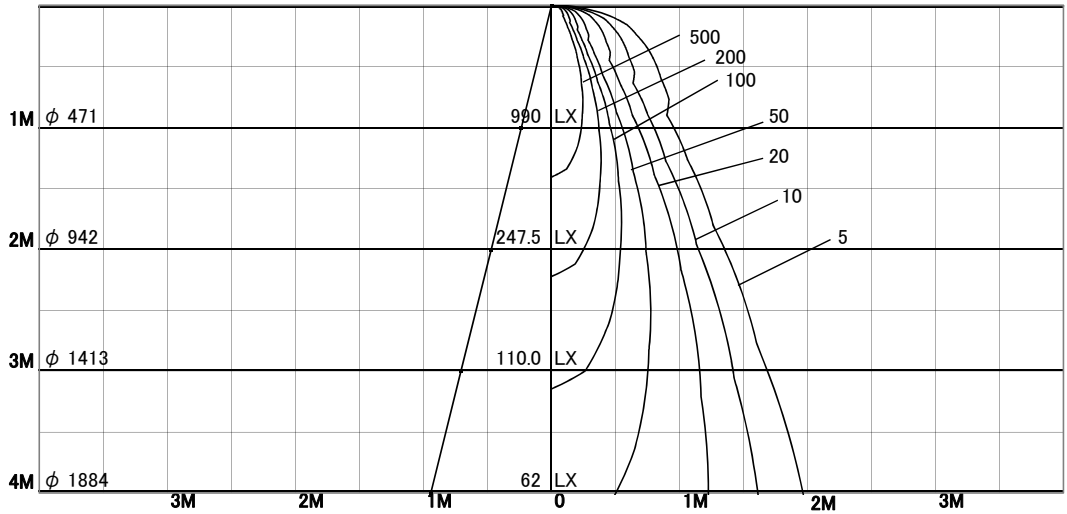

照明率表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁	10%																0%
床	10%																0%
0.60	77	70	66	63	76	70	66	63	75	69	66	63	73	69	65	63	62
0.80	82	75	71	68	81	75	71	68	79	74	71	68	78	73	70	68	66
1.00	86	80	76	73	85	80	76	73	83	79	75	73	81	78	75	72	71
1.25	89	84	80	77	88	83	80	77	86	82	79	77	84	81	78	76	75
1.50	91	87	83	81	90	86	83	80	88	85	82	80	87	84	81	79	78
2.00	95	91	89	86	94	91	88	86	92	89	87	85	90	88	86	84	82
2.50	97	94	92	90	96	93	91	89	94	92	90	88	92	90	89	87	86
3.00	98	96	94	93	97	95	94	92	95	94	92	91	94	92	91	90	88
4.00	100	98	97	95	99	97	96	95	97	96	95	94	95	94	93	92	90
5.00	101	99	98	97	100	99	97	97	98	97	96	95	96	95	94	94	91
7.00	102	101	100	100	101	100	99	99	99	98	98	97	97	96	96	96	93
10.00	102	102	102	101	101	101	101	100	99	99	99	99	98	97	97	97	94