


屋内照明器具特性



品名	PD-2926-LL		
光源	LDA7L-G/R90 (7.2W) × 1灯		
実効光束 (器具光束)	567lm	効率	78.7lm/W



配光曲線図
実光度

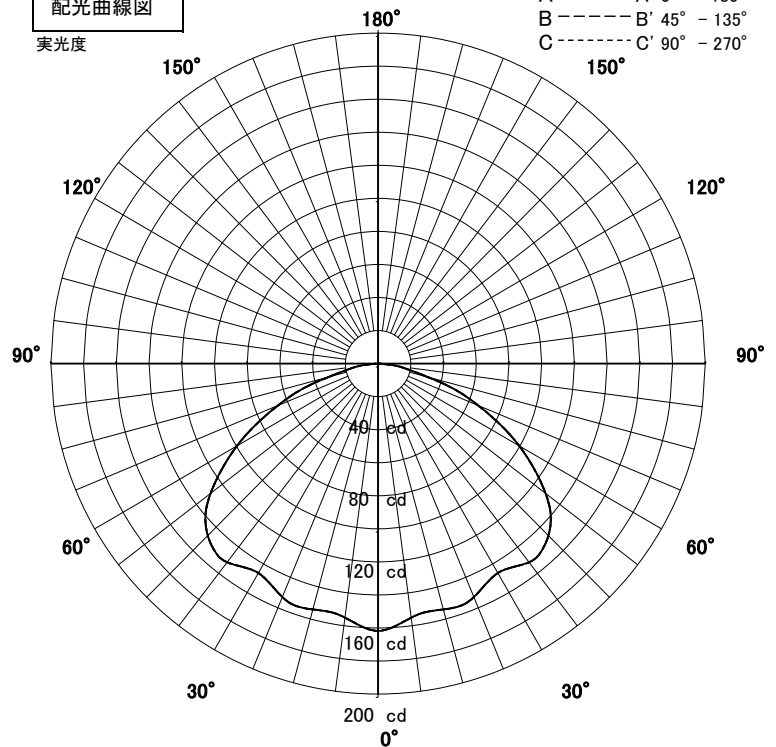

1/2照度角


直射水平面照度

単位:Lx

色温度	2700K	
演色評価指数	Ra94	
保守率	良	0.67
	中	0.63
	否	0.56

1/2照度角		
A-A'	72.0	Deg
C-C'	72.0	Deg

最大取付間隔		
A-A'	1.45	H
C-C'	1.45	H

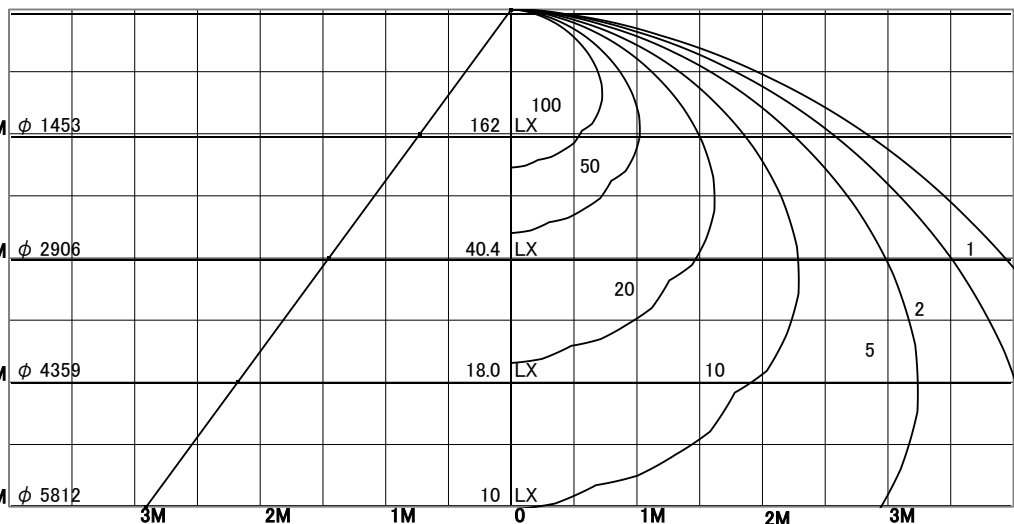

照明率表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
床	10%																0%
0.60	55	42	34	28	53	41	34	28	51	40	33	28	49	39	33	28	26
0.80	64	52	44	38	63	52	44	38	60	50	43	38	57	49	42	37	35
1.00	72	60	52	46	70	59	52	46	67	58	51	46	64	56	50	45	43
1.25	78	68	60	54	76	67	60	54	73	65	59	54	70	63	58	53	51
1.50	83	73	66	61	81	72	66	60	78	70	65	60	75	69	63	59	57
2.00	89	82	75	70	87	80	75	70	84	78	73	69	81	76	72	68	66
2.50	93	87	81	77	91	86	81	76	88	83	79	75	86	81	78	75	72
3.00	96	90	86	82	94	89	85	81	91	87	83	80	88	85	82	79	76
4.00	99	95	91	88	97	93	90	87	95	91	88	86	92	89	87	84	82
5.00	101	97	94	91	99	96	93	90	97	94	91	89	94	92	90	88	85
7.00	103	100	98	96	102	99	97	95	99	97	95	93	96	95	93	92	89
10.00	104	103	101	99	103	101	100	98	101	99	98	97	98	97	96	95	92