



屋外照明器具特性

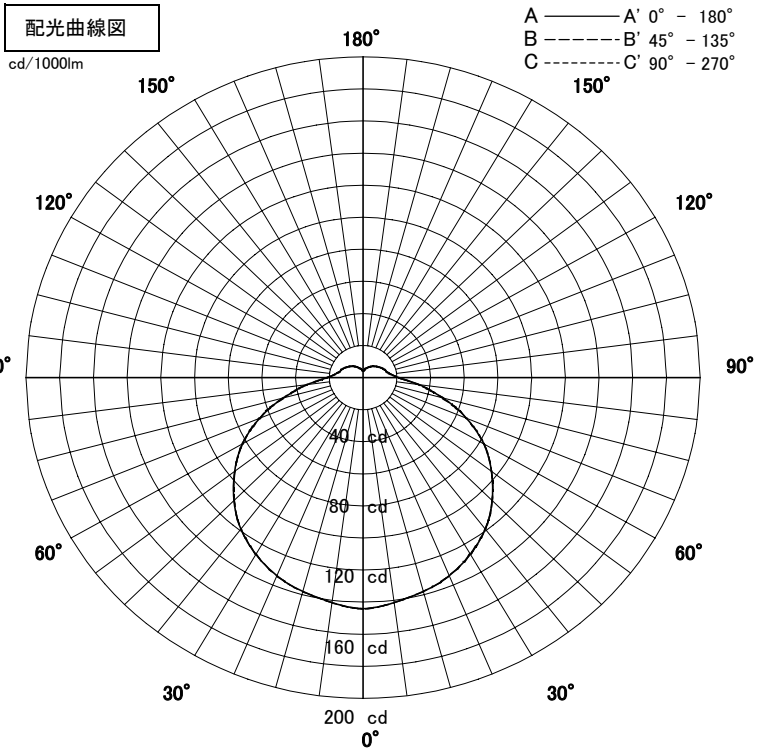

品名	AD-2561-L			
光源	LED8.3W			
光束	500 Lm	灯数	1	灯




直射水平面照度

単位:Lx

A-A' Section

C-C' Section

器具効率	58.5	%
上方効率	7.7	%
下方効率	50.8	%
保守率	良	0.67
	中	0.63
	否	0.60
1/2照度角		
A-A'	67.0	Deg
C-C'	67.0	Deg
最大取付間隔		
A-A'	1.32	H
C-C'	1.32	H

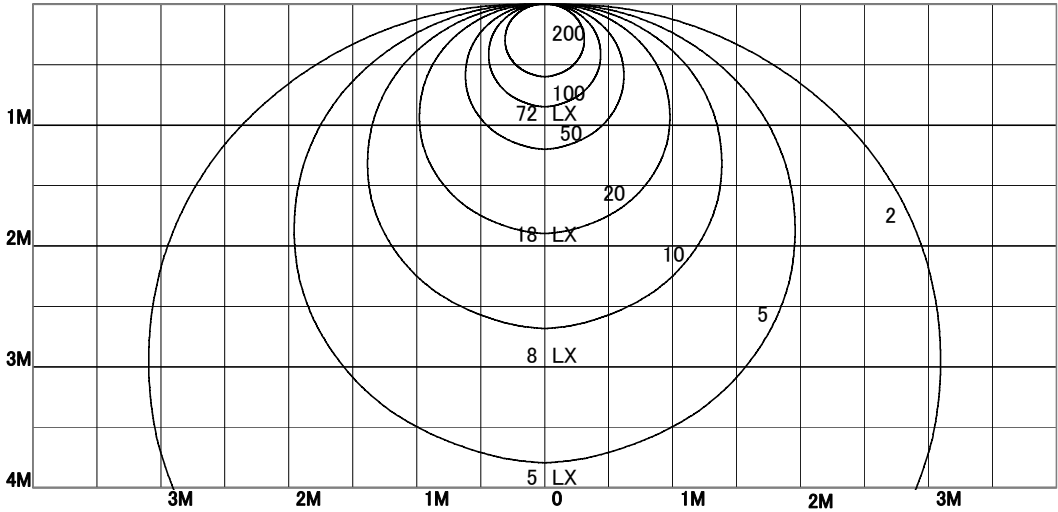

照 明 率 表

天井	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
壁	10%				10%				10%				10%				0%
床	10%				10%				10%				10%				0%
0.60	28	21	17	14	27	21	17	14	26	20	17	14	25	20	16	14	13
0.80	32	26	21	18	31	25	21	18	30	25	21	18	28	24	20	18	17
1.00	36	29	25	22	35	29	25	22	33	28	24	22	32	27	24	21	20
1.25	39	33	29	26	38	33	29	25	36	32	28	25	34	31	27	25	24
1.50	41	36	32	29	40	35	31	28	38	34	31	28	37	33	30	28	26
2.00	44	40	36	33	43	39	36	33	41	38	35	33	40	37	34	32	31
2.50	46	42	39	37	45	42	39	36	44	41	38	36	42	39	37	35	34
3.00	48	44	41	39	47	44	41	39	45	42	40	38	43	41	39	38	36
4.00	49	47	44	42	48	46	44	42	47	45	43	41	45	44	42	41	39
5.00	50	48	46	44	50	47	46	44	48	46	45	43	47	45	44	42	41
7.00	52	50	48	47	51	49	48	46	49	48	47	46	48	47	46	45	43
10.00	53	51	50	49	52	51	50	49	51	50	49	48	49	48	48	47	45