



屋外照明器具特性



品名	AD-2596-N		
光源	LDA4N-G-E17/S/40W × 1		
実効光束 (器具光束)	313lm	効率	80.3lm/W


配光曲線図
実光度

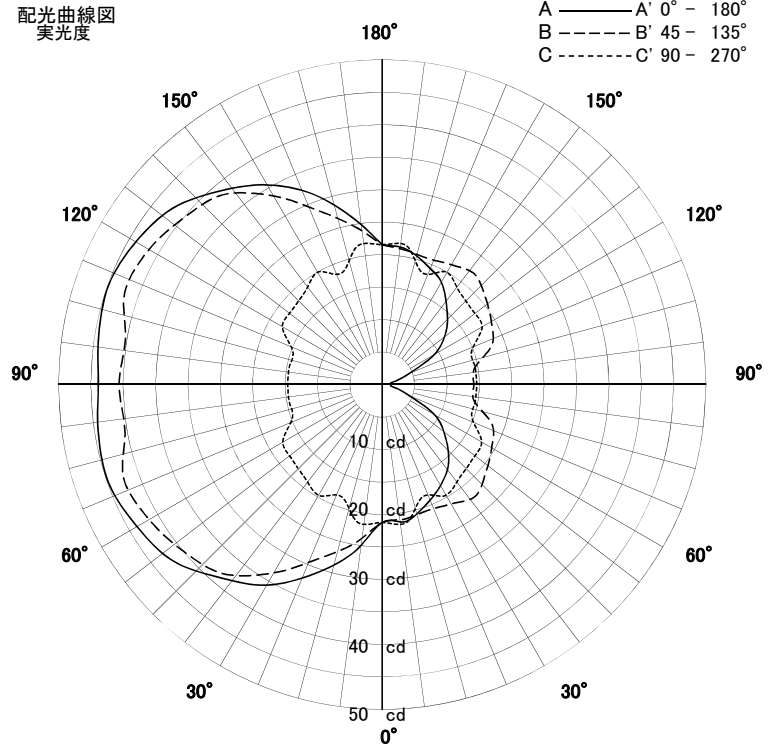

壁付け

色温度	5000K	
演色評価指数	Ra70	
保守率	良	0.69
	中	0.67
	否	0.63


水平面照度分布	
単位: Lx	
地上高	2.00 M
保守率	1.00

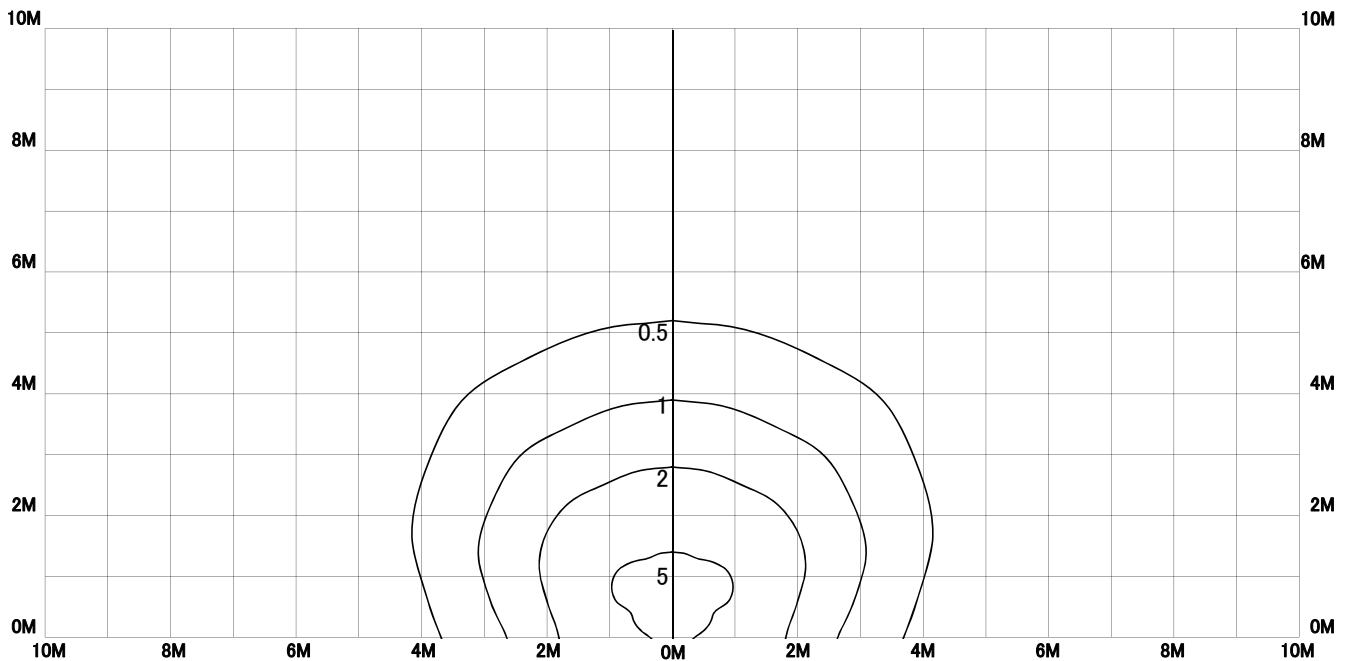

屋外照明器具特性




品名	AD-2596-N		
光源	LDA4N-G-E17/S/40W × 1		
実効光束 (器具光束)	313lm	効率	80.3lm/W



直付け

配光曲線図

実光度

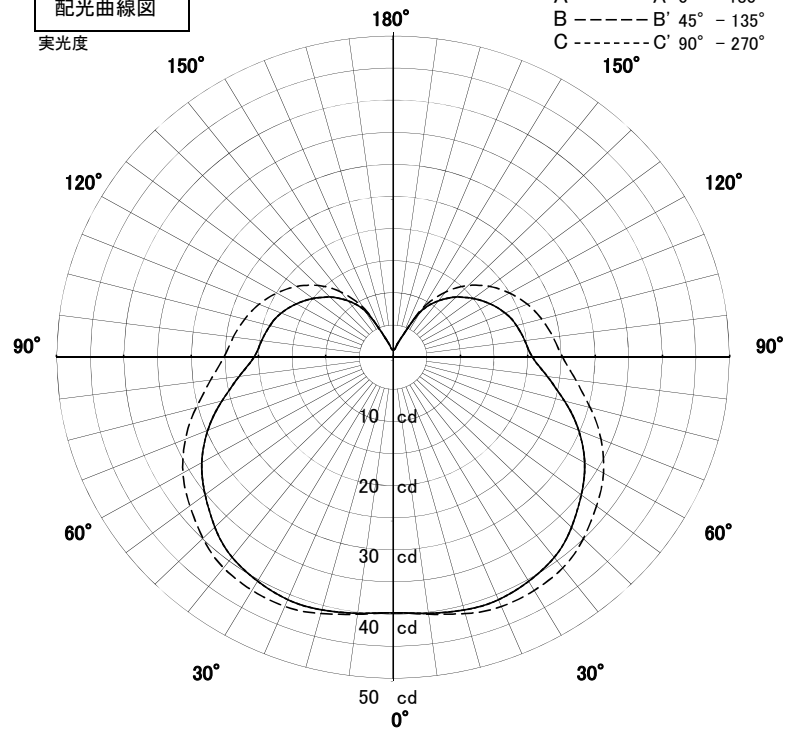


1/2照度角

直射水平面照度

単位:Lx

色温度	5000K	
演色評価指数	Ra83	
保守率	良	0.69
	中	0.67
	否	0.63

1/2照度角		
A-A'	74.5	Deg
C-C'	74.5	Deg
最大取付間隔		
A-A'	1.52	H
C-C'	1.52	H

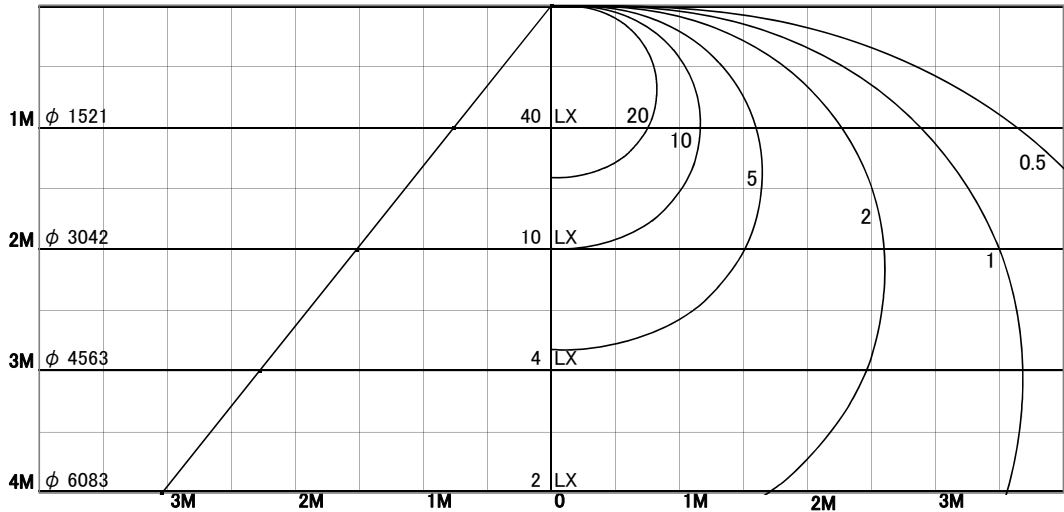

照明率表

	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
天井	10%																0%
壁	10%																0%
床	10%																0%
0.60	34	25	19	15	33	24	19	15	31	23	18	15	30	23	18	14	13
0.80	40	30	24	19	39	30	24	19	36	29	23	19	34	28	23	19	17
1.00	44	35	29	24	43	34	28	24	40	33	28	23	38	32	27	23	22
1.25	48	40	33	28	47	39	33	28	44	37	32	28	42	36	31	28	26
1.50	51	43	37	32	50	42	37	32	47	41	36	32	45	39	35	31	29
2.00	55	48	43	38	54	48	42	38	51	46	41	37	49	44	40	37	35
2.50	58	52	47	43	57	51	46	42	54	49	45	42	52	48	44	41	39
3.00	60	55	50	46	59	54	49	46	56	52	48	45	54	50	47	44	42
4.00	63	58	54	51	61	57	53	50	59	55	52	49	57	54	51	48	46
5.00	64	60	57	54	63	60	56	53	61	58	55	52	59	56	54	51	49
7.00	66	63	60	58	65	62	60	57	63	61	58	56	61	59	57	55	53
10.00	68	66	63	61	67	65	63	61	65	63	61	60	63	61	60	58	56



屋外照明器具特性



品名	AD-2596-N		
光源	LDA4N-G-E17/S/40W × 1		
実効光束 (器具光束)	313lm	効率	80.3lm/W

配光曲線図
実光度

A ——— A' 0° - 180°
B - - - - - B' 45° - 135°
C ······ C' 90° - 270°

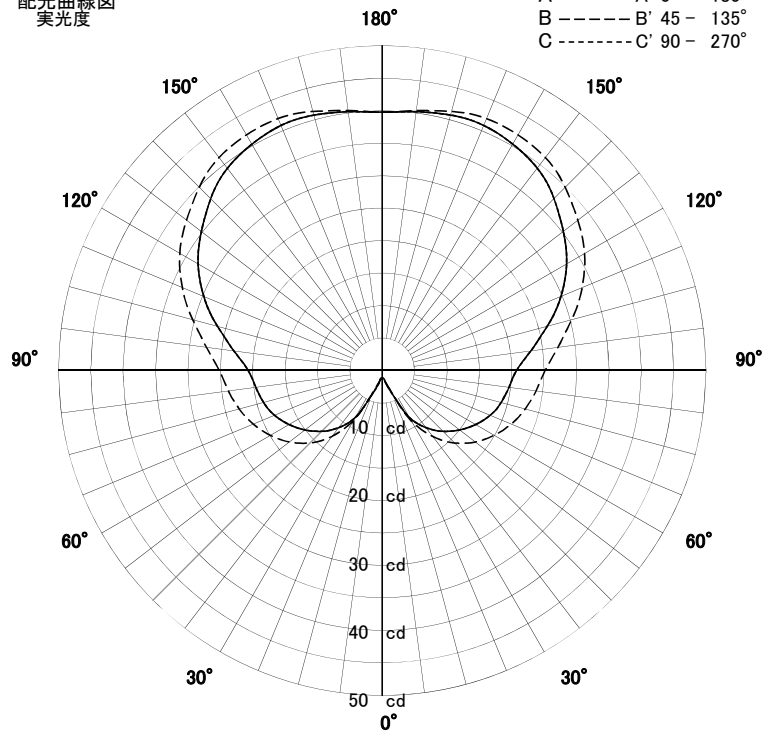

置き型

色温度	5000K	
演色評価指数	Ra83	
保守率	良	0.69
	中	0.67
	否	0.63

水平面照度分布

単位: Lx

地上高 0.10 M

保守率 1.00

