



屋外照明器具特性



品名	AD-3288-LL		
光源	LED_5.5W × 1		
実効光束 (器具光束)	435lm	効率	79.lm/W


配光曲線図
実光度

A ——— A' 0° - 180°
B - - - - B' 45° - 135°
C - · - · - C' 90° - 270°

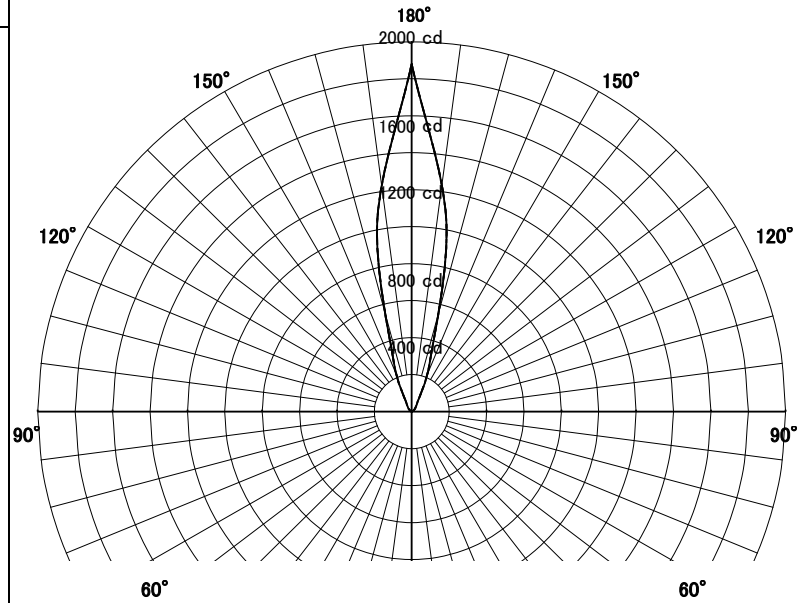

色温度	2700K	
演色評価指数	Ra90	
保守率	良	0.8
	中	0.6
	否	0.54

1/2ビーム角		
A-A'	22.5	度
C-C'	22.5	度

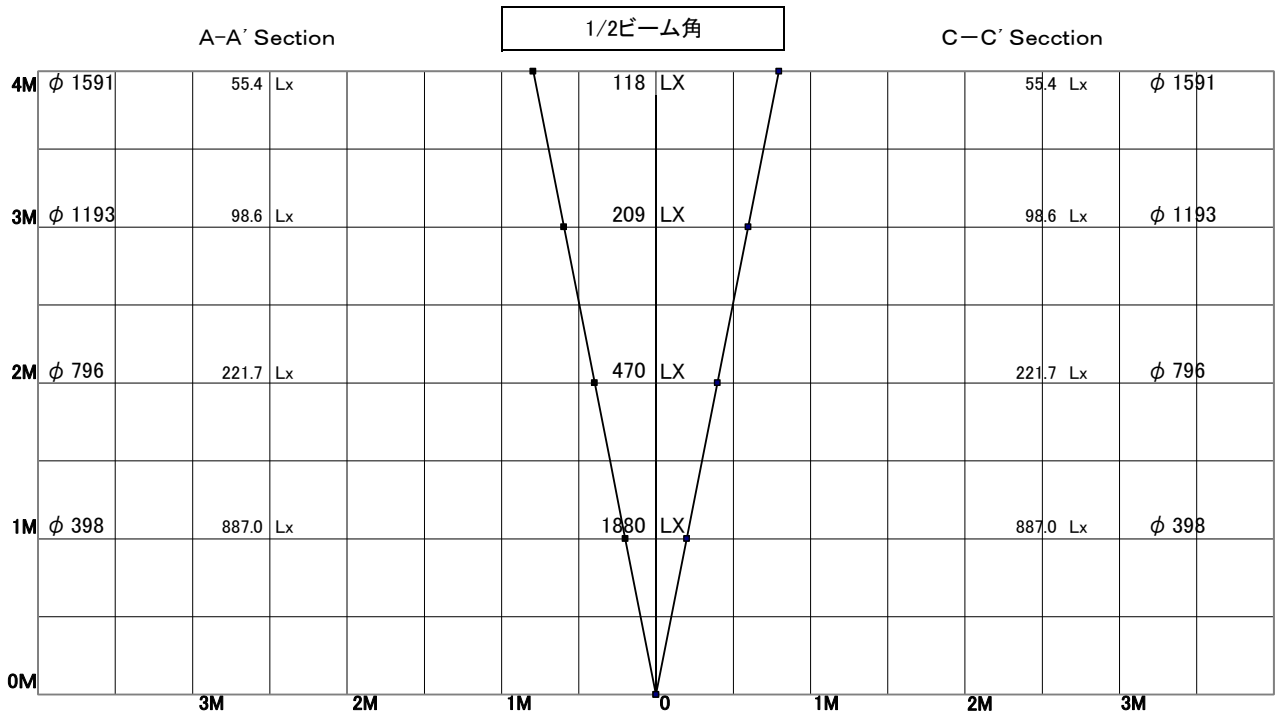


屋外照明器具特性




品名	AD-3288-LL+TG475		
光源	LED_5.5W × 1		
実効光束 (器具光束)	262lm	効率	47.6lm/W

配光曲線図
実光度

A ——— A' 0° - 180°
B - - - - - B' 45° - 135°
C - · - · - · C' 90° - 270°




TG-475(ハニカム・ルーバー)付

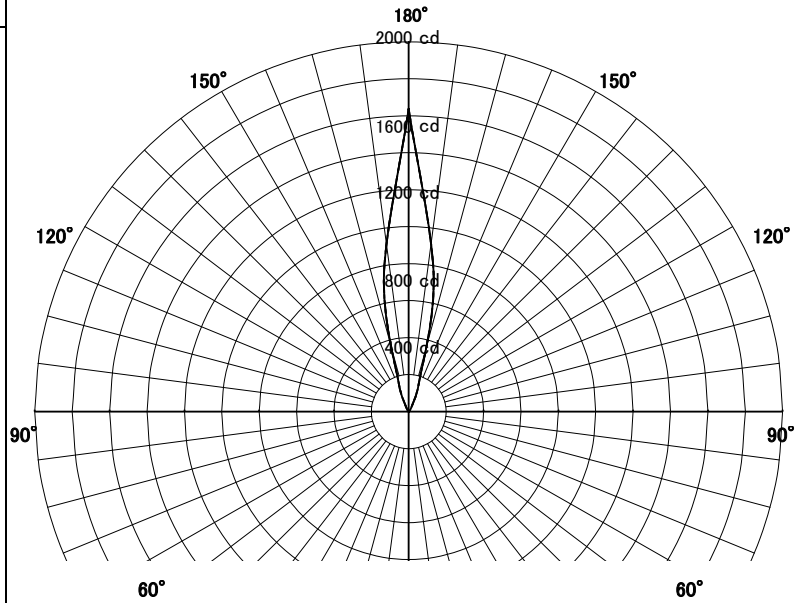

色温度	2700K	
演色評価指数	Ra90	
保守率	良	0.8
	中	0.6
	否	0.54

1/2ビーム角		
A-A'	19.0	度
C-C'	19.0	度

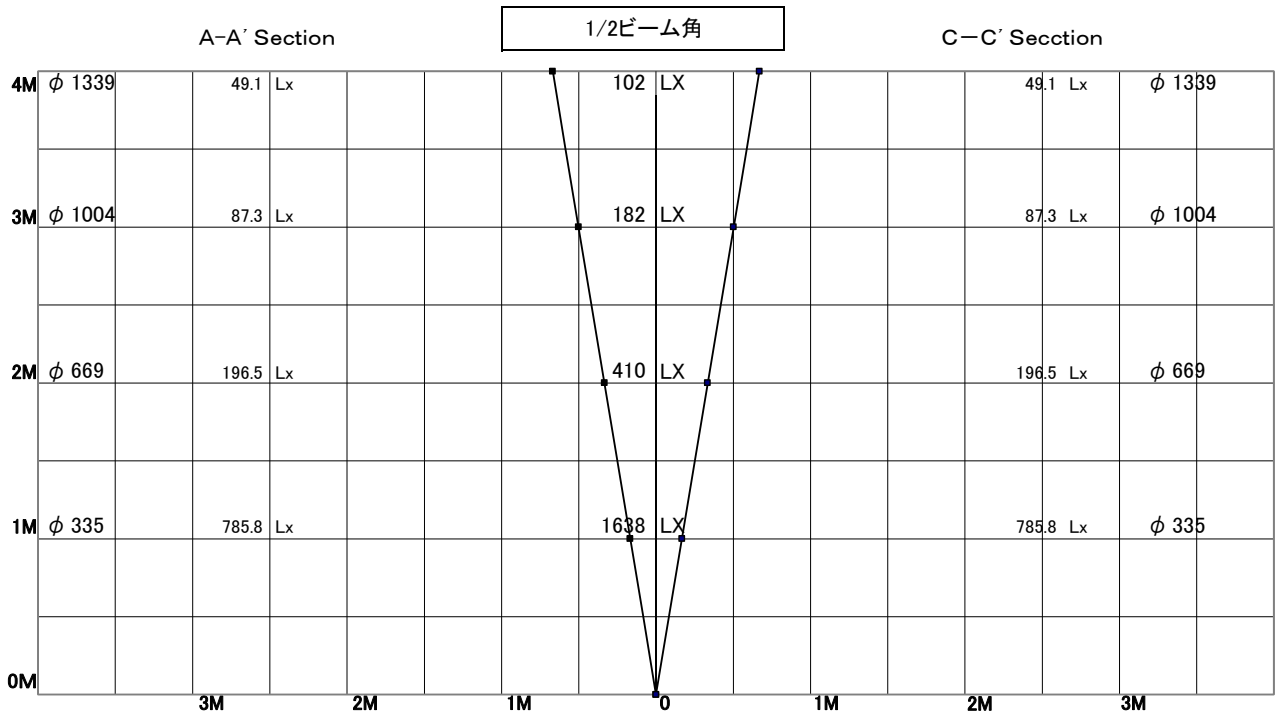


屋外照明器具特性




品名	AD-3288-LL+TG476		
光源	LED_5.5W × 1		
実効光束 (器具光束)	380lm	効率	69.lm/W

配光曲線図
実光度

A ——— A' 0° - 180°
B - - - - B' 45° - 135°
C - · - · - C' 90° - 270°



TG-476(スプレッド・レンズ)付

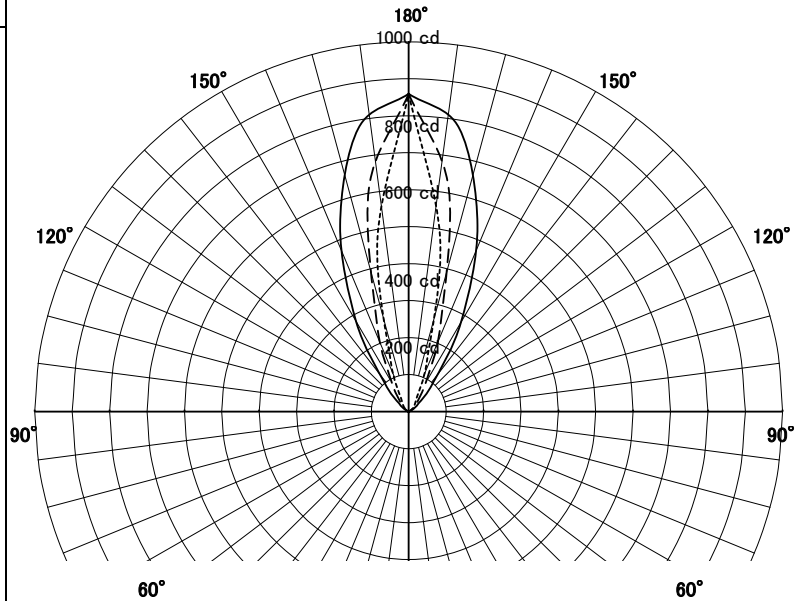

色温度	2700K	
演色評価指数	Ra90	
保守率	良	0.8
	中	0.6
	否	0.54

1/2ビーム角		
A-A'	48.0	度
C-C'	22.5	度

