



屋外照明器具特性



品名	AD-3291-LL		
光源	LED 5.5W × 1		
実効光束 (器具光束)	395lm	効率	71.8lm/W


配光曲線図
実光度

A ——— A' 0° - 180°
B - - - - B' 45° - 135°
C - · - · - C' 90° - 270°

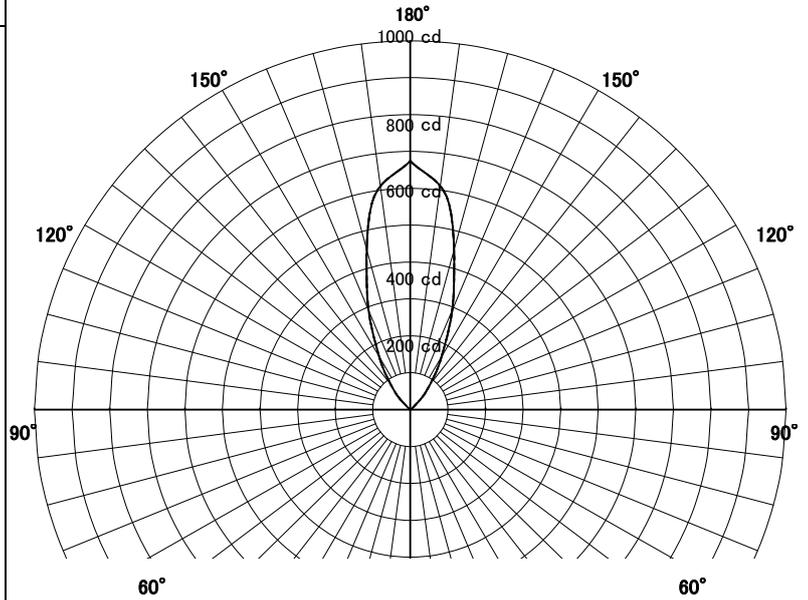

色温度	2700K	
演色評価指数	Ra90	
保守率	良	0.8
	中	0.6
	否	0.54

1/2ビーム角		
A-A'	40.0	度
C-C'	40.0	度

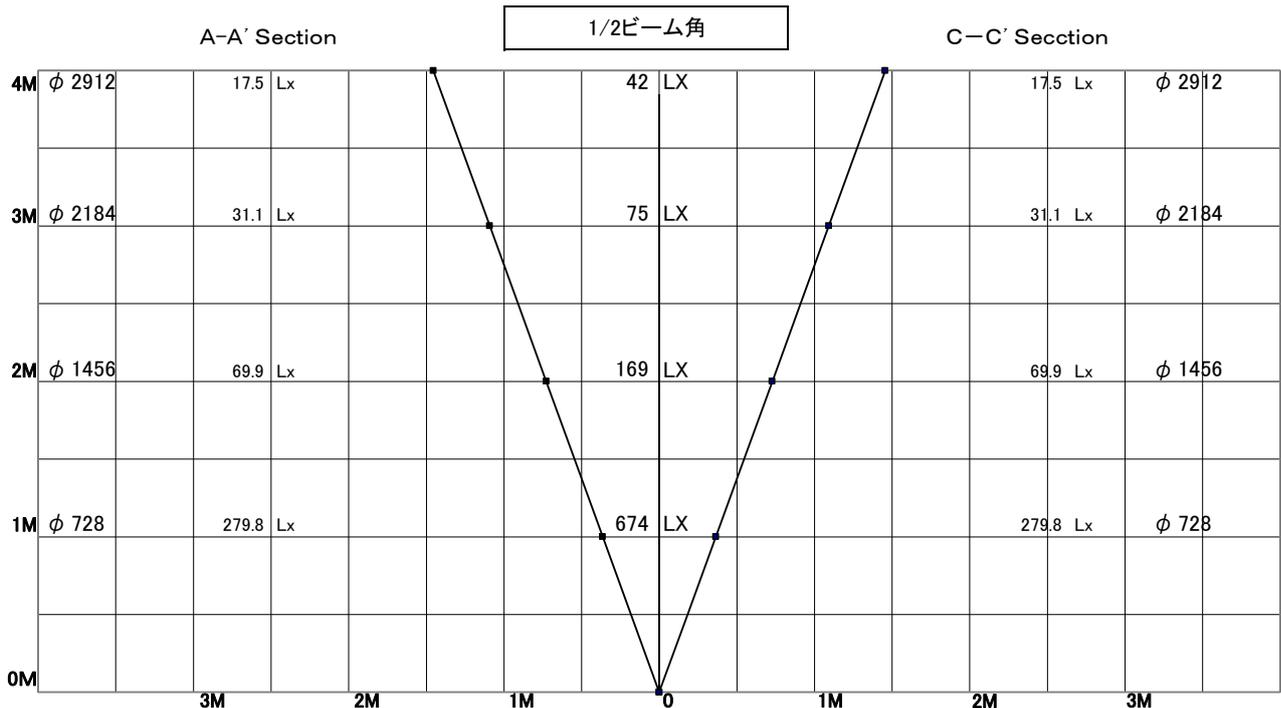


屋外照明器具特性




品名	AD-3291-LL+TG307		
光源	LED_5.5W × 1		
実効光束 (器具光束)	205lm	効率	37.2lm/W

配光曲線図
実光度

A ——— A' 0° - 180°
B - - - - B' 45° - 135°
C - · - · - C' 90° - 270°




TG-307(ハニカム・ルーバー)付

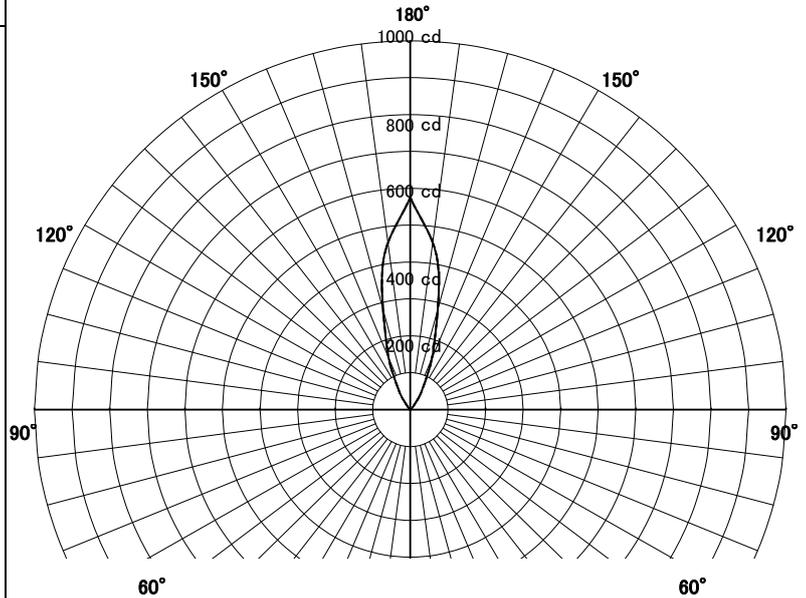

色温度	2700K	
演色評価指数	Ra90	
保守率	良	0.8
	中	0.6
	否	0.54

1/2ビーム角		
A-A'	30.5	度
C-C'	30.5	度

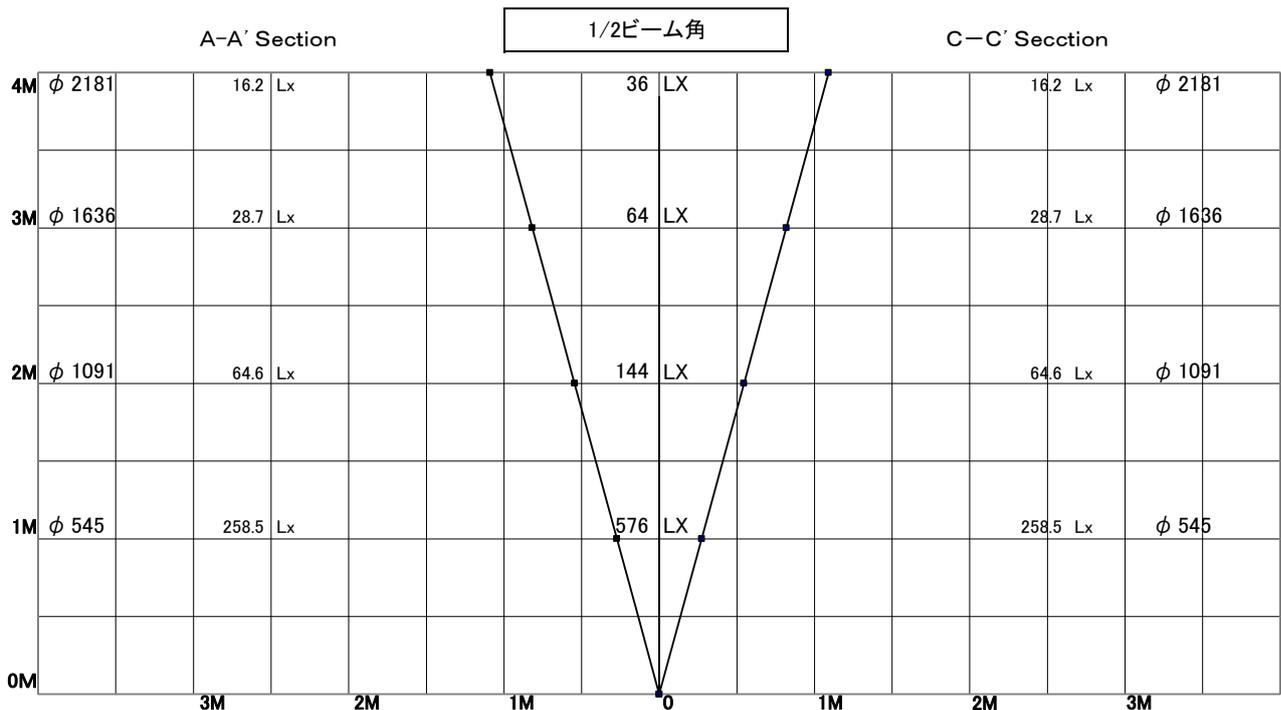



屋外照明器具特性



品名	AD-3291-LL+TG445		
光源	LED_5.5W × 1		
実効光束 (器具光束)	336lm	効率	61.lm/W

配光曲線図
実光度

A ——— A' 0° - 180°
B - - - - B' 45° - 135°
C - · - · - C' 90° - 270°

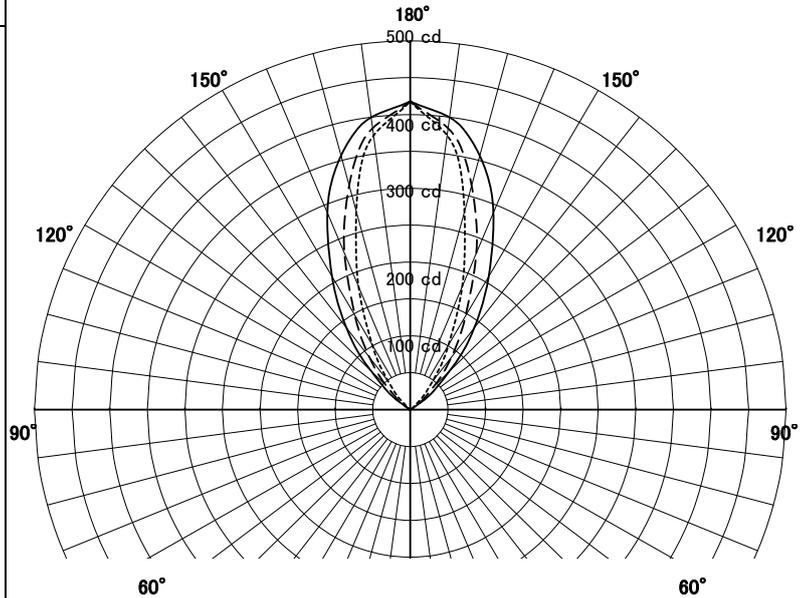

TG-445(スプレッド・レンズ)付

色温度	2700K	
演色評価指数	Ra90	
保守率	良	0.8
	中	0.6
	否	0.54

1/2ビーム角		
A-A'	60.0	度
C-C'	40.0	度

