


屋内照明器具特性




品名	DD-3131-L		
光源	PowerLED 22W		
光束	1430 Lm	灯数	1 灯



配光曲線図

cd/1000lm

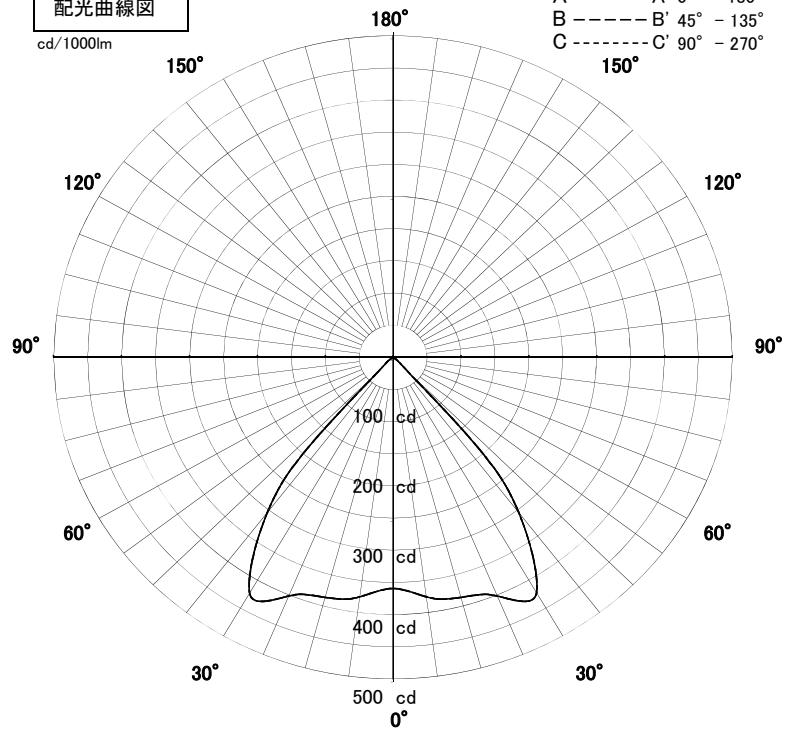


A ——— A' 0° - 180°
 B - - - - - B' 45° - 135°
 C - - - - - C' 90° - 270°

1/2照度角

直射水平面照度

単位:Lx

器具効率	65.0	%
上方効率	0.0	%
下方効率	65.0	%
保守率	良	0.60
	中	0.56
	否	0.53
1/2照度角		
A-A'	73.5	Deg
C-C'	73.5	Deg
最大取付間隔		
A-A'	1.49	H
C-C'	1.49	H

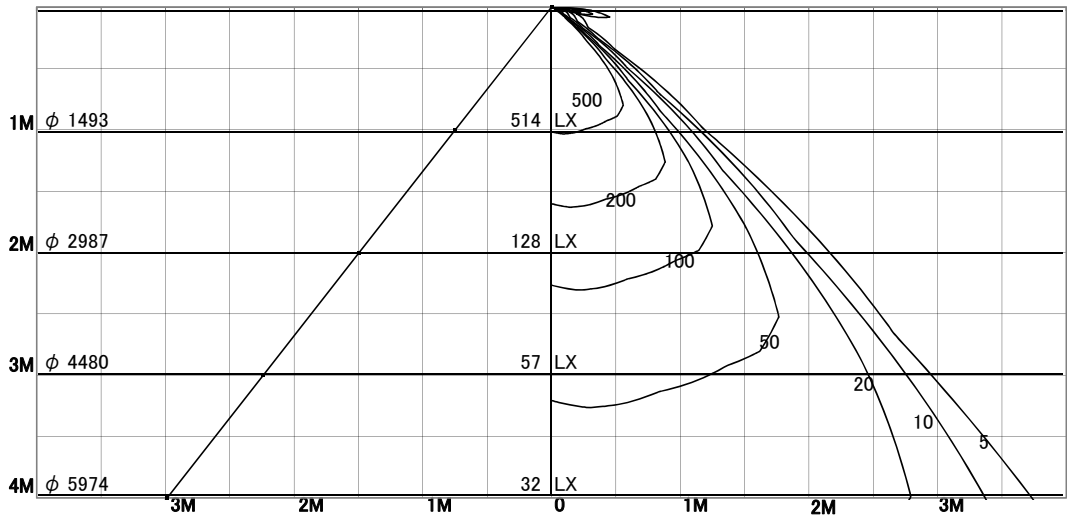

照明率表

	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
天井	10%																0%
壁	10%																0%
床	10%																0%
0.60	53	48	45	42	52	47	44	42	51	47	44	42	50	47	44	42	41
0.80	57	52	49	47	56	52	49	47	55	51	49	47	54	51	48	47	46
1.00	60	56	53	51	60	56	53	51	58	55	53	51	57	54	52	51	50
1.25	63	59	57	55	62	59	57	55	61	58	56	54	60	57	56	54	53
1.50	65	62	59	57	64	61	59	57	63	60	58	57	61	59	58	56	55
2.00	67	65	63	62	67	64	63	61	65	63	62	61	64	62	61	60	59
2.50	69	67	65	64	68	66	65	64	67	65	64	63	65	64	63	62	61
3.00	70	68	67	66	69	68	67	66	68	67	66	65	66	65	65	64	63
4.00	71	70	69	68	70	69	68	67	68	68	67	66	67	67	66	65	64
5.00	71	70	69	69	70	70	69	68	69	68	68	67	68	67	67	66	65
7.00	72	71	71	70	71	70	70	70	70	69	69	68	68	68	68	67	66
10.00	72	72	71	71	71	71	71	70	70	70	69	69	69	68	68	68	66