


屋内照明器具特性




品名	DN-3155		
光源	LDA7N-G-K/60W×1		
実効光束 (器具光束)	332lm	効率	45.5lm/W

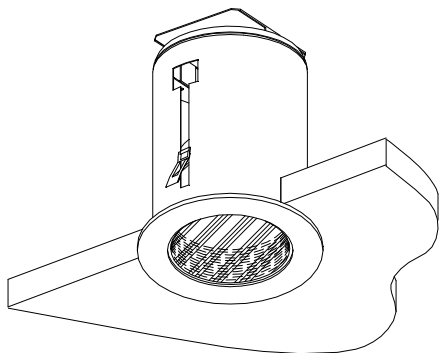

配光曲線図

実光度

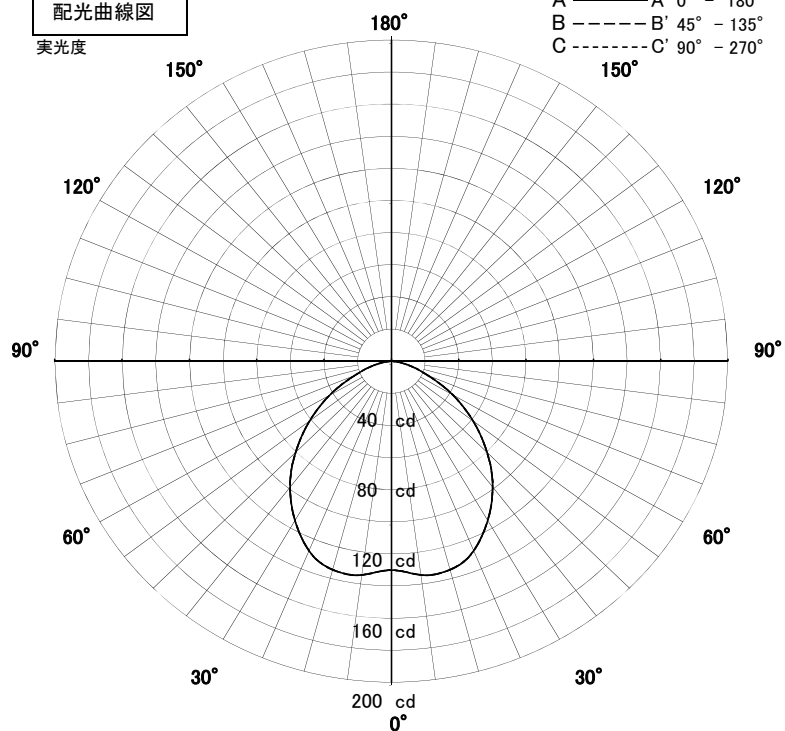


1/2照度角

直射水平面照度

単位:Lx

色温度	5000K	
演色評価指数	Ra70	
保守率	良	0.69
	中	0.67
	否	0.63

1/2照度角		
A-A'	65.5	Deg
C-C'	65.5	Deg
最大取付間隔		
A-A'	1.29	H
C-C'	1.29	H

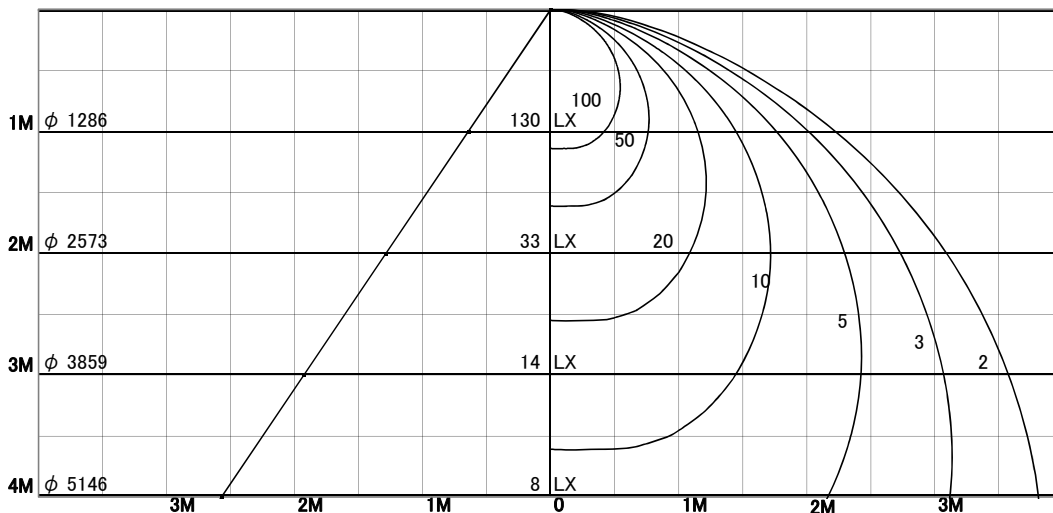

照 明 率 表

天井	80%				70%				50%				30%				0%
壁	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
床	10%				10%				10%				10%				0%
0.60	60	49	42	37	59	49	42	37	57	48	41	37	55	47	41	37	35
0.80	69	59	52	46	68	58	51	46	65	57	51	46	63	56	50	46	44
1.00	76	66	59	54	75	66	59	54	72	64	58	54	69	63	57	53	51
1.25	82	73	67	62	80	72	66	61	78	71	65	61	75	69	64	60	58
1.50	86	78	72	67	84	77	72	67	82	75	70	66	79	74	69	66	64
2.00	92	85	80	76	90	84	80	76	87	83	78	75	85	81	77	74	72
2.50	95	90	85	82	94	89	85	81	91	87	83	80	88	85	82	79	77
3.00	97	93	89	86	96	92	88	85	93	90	87	84	91	88	85	83	81
4.00	100	96	93	91	99	95	93	90	96	93	91	89	94	91	89	87	85
5.00	101	99	96	94	100	97	95	93	98	95	93	91	95	93	92	90	88
7.00	103	101	99	97	102	100	98	97	99	98	96	95	97	96	95	93	91
10.00	104	103	101	100	103	102	100	99	101	100	98	97	98	97	97	96	93


屋内照明器具特性



品名	DN-3155		
光源	LDA8L-G-K/60W×1		
実効光束 (器具光束)	332lm	効率	42.6lm/W

配光曲線図

実光度

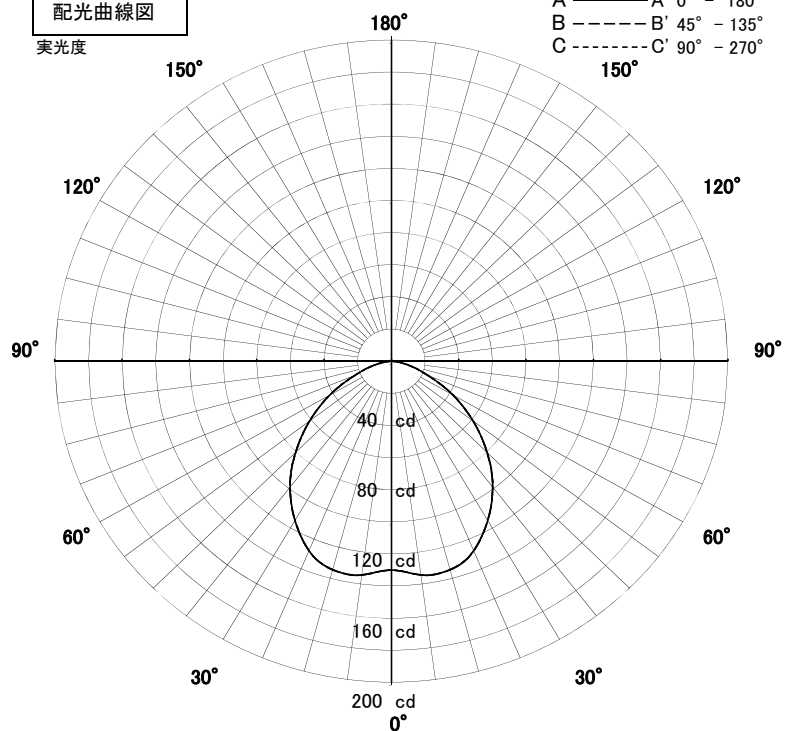


1/2照度角

直射水平面照度

単位:Lx

色温度		2700K
演色評価指数		Ra80
保守率	良	0.69
	中	0.67
	否	0.63

1/2照度角		
A-A'	65.5	Deg
C-C'	65.5	Deg
最大取付間隔		
A-A'	1.29	H
C-C'	1.29	H

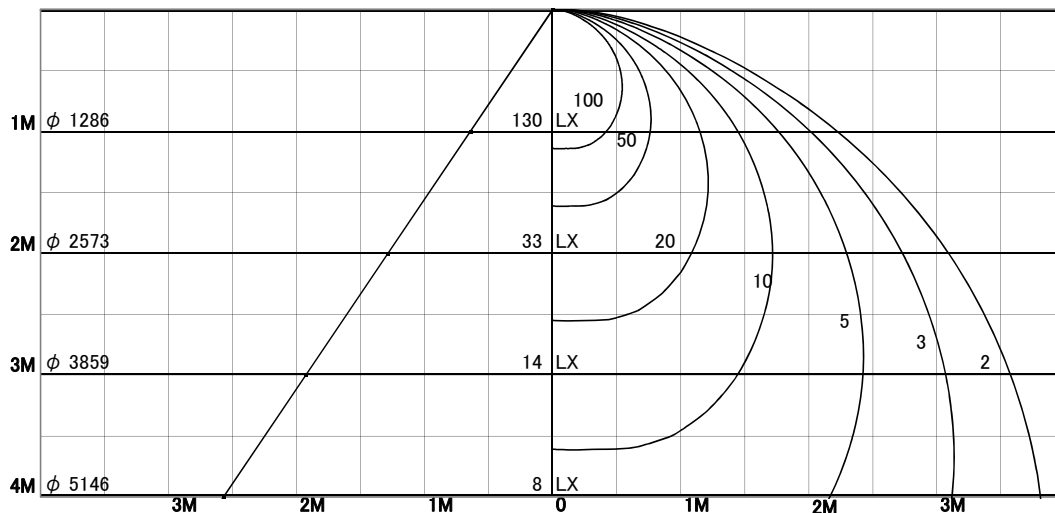

照 明 率 表

天井	80%				70%				50%				30%				0%
壁	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
床	10%				10%				10%				10%				0%
0.60	60	49	42	37	59	49	42	37	57	48	41	37	55	47	41	37	35
0.80	69	59	52	46	68	58	51	46	65	57	51	46	63	56	50	46	44
1.00	76	66	59	54	75	66	59	54	72	64	58	54	69	63	57	53	51
1.25	82	73	67	62	80	72	66	61	78	71	65	61	75	69	64	60	58
1.50	86	78	72	67	84	77	72	67	82	75	70	66	79	74	69	66	64
2.00	92	85	80	76	90	84	80	76	87	83	78	75	85	81	77	74	72
2.50	95	90	85	82	94	89	85	81	91	87	83	80	88	85	82	79	77
3.00	97	93	89	86	96	92	88	85	93	90	87	84	91	88	85	83	81
4.00	100	96	93	91	99	95	93	90	96	93	91	89	94	91	89	87	85
5.00	101	99	96	94	100	97	95	93	98	95	93	91	95	93	92	90	88
7.00	103	101	99	97	102	100	98	97	99	98	96	95	97	96	95	93	91
10.00	104	103	101	100	103	102	100	99	101	100	98	97	98	97	97	96	93