


屋内照明器具特性




品名	DD-3171-L		
光源	LDA7L-H/60W		
実効光束 (器具光束)	582lm	効率	83.1lm/W



配光曲線図

実光度

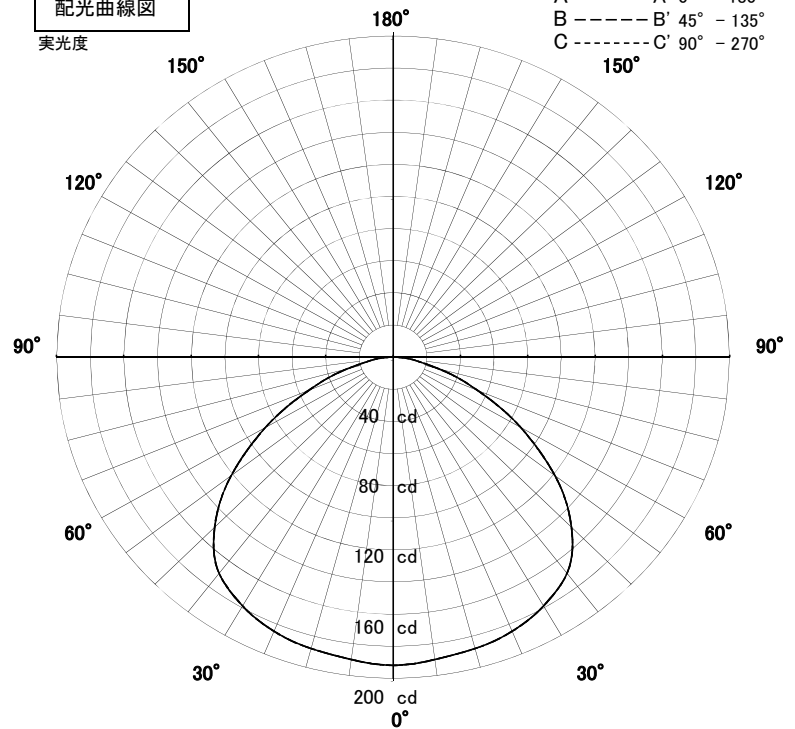


A ——— A' 0° - 180°
 B - - - - - B' 45° - 135°
 C - - - - - C' 90° - 270°

1/2照度角

直射水平面照度

単位:Lx

色温度	2700K	
演色評価指数	Ra83	
保守率	良	0.8
	中	0.6
	否	0.54

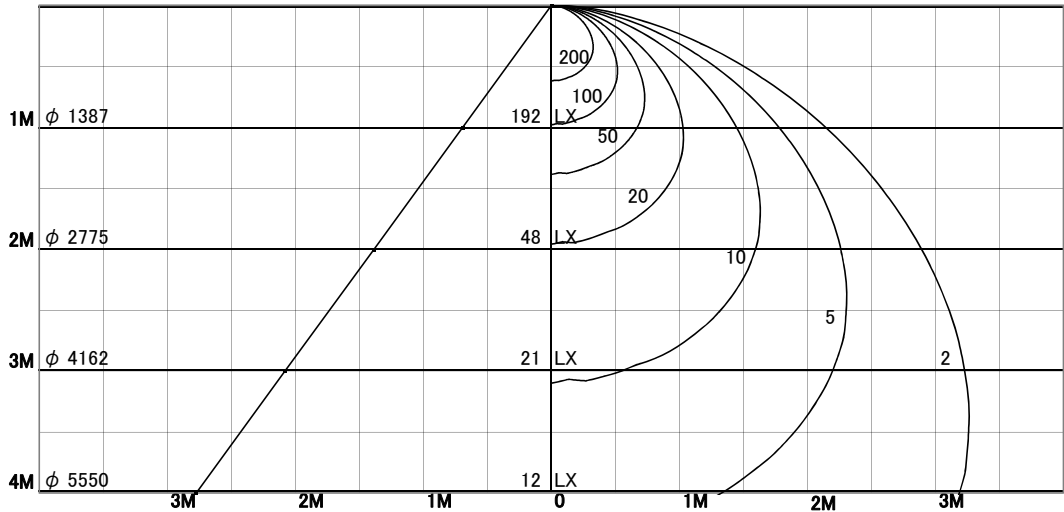

1/2照度角		
A-A'	69.5	Deg
C-C'	69.5	Deg
最大取付間隔		
A-A'	1.39	H
C-C'	1.39	H

照明率表

	80%				70%				50%				30%				0%
	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
天井	10%																0%
壁	10%																0%
床	10%																0%
0.60	58	46	38	33	57	45	38	33	54	44	37	33	52	43	37	32	30
0.80	67	56	48	42	66	55	48	42	63	54	47	42	61	52	46	42	40
1.00	74	64	56	50	73	63	56	50	70	61	55	50	67	60	54	49	47
1.25	80	71	64	58	79	70	63	58	76	68	62	58	73	67	61	57	55
1.50	85	76	70	64	83	75	69	64	80	73	68	63	77	72	67	63	61
2.00	91	84	78	74	89	83	78	73	86	81	76	72	84	79	75	72	69
2.50	95	89	84	80	93	88	83	79	90	86	82	78	87	84	80	77	75
3.00	97	92	88	84	96	91	87	84	93	89	86	82	90	87	84	81	79
4.00	100	96	93	90	98	95	92	89	96	93	90	88	93	91	88	86	84
5.00	102	98	96	93	100	97	95	92	98	95	93	91	95	93	91	89	87
7.00	104	101	99	97	102	100	98	96	100	98	96	95	97	96	94	93	90
10.00	105	103	102	100	104	102	101	99	101	100	99	97	99	98	97	96	93