



屋内照明器具特性



品名	DD-3208-N		
光源	LED30W		
実効光束 (器具光束)	2297lm	エネルギー 効率	76.6lm/W

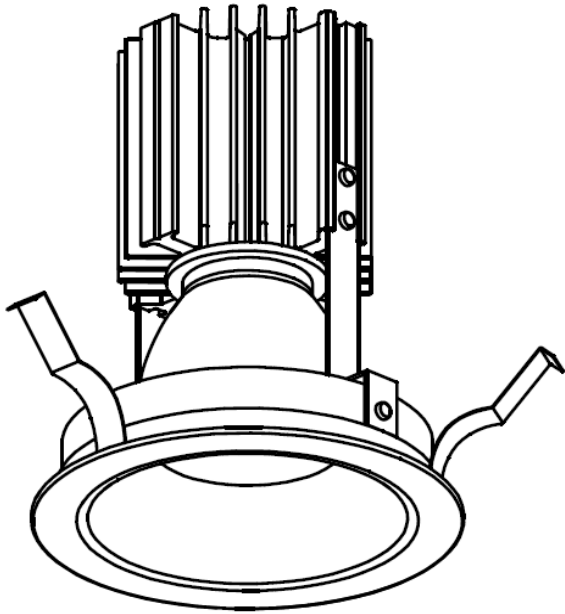

配光曲線図
実光度

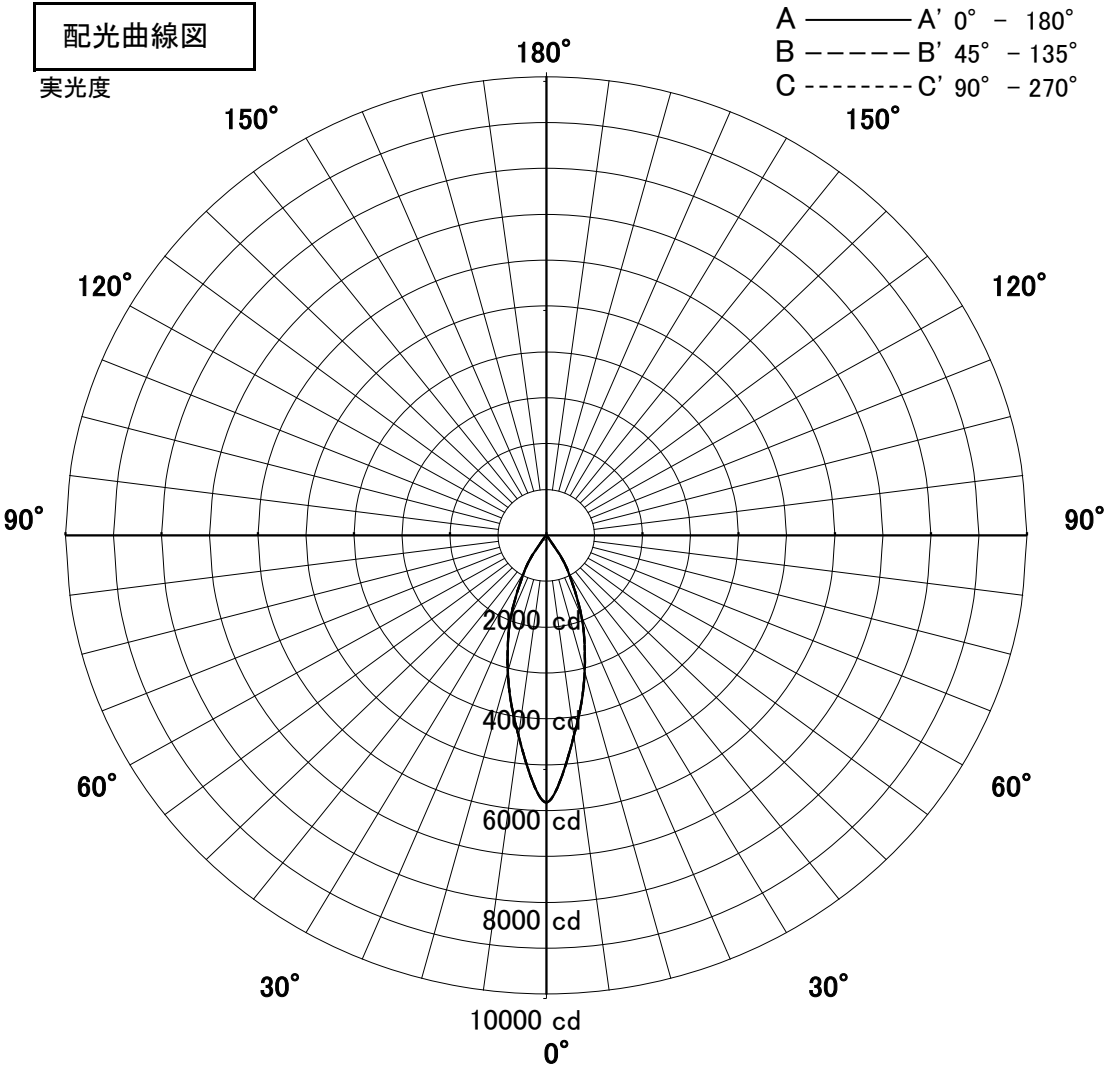


1/2照度角

直射水平面照度

単位 : Lx

器具効率		73.2%
色温度		5000K
演色評価指数		Ra83
保守率	良	0.67
	中	0.63
	否	0.56
1/2照度角		
A-A'	26.0	Deg
C-C'	26.0	Deg
最大取付間隔		
A-A'	0.46	H
C-C'	0.46	H

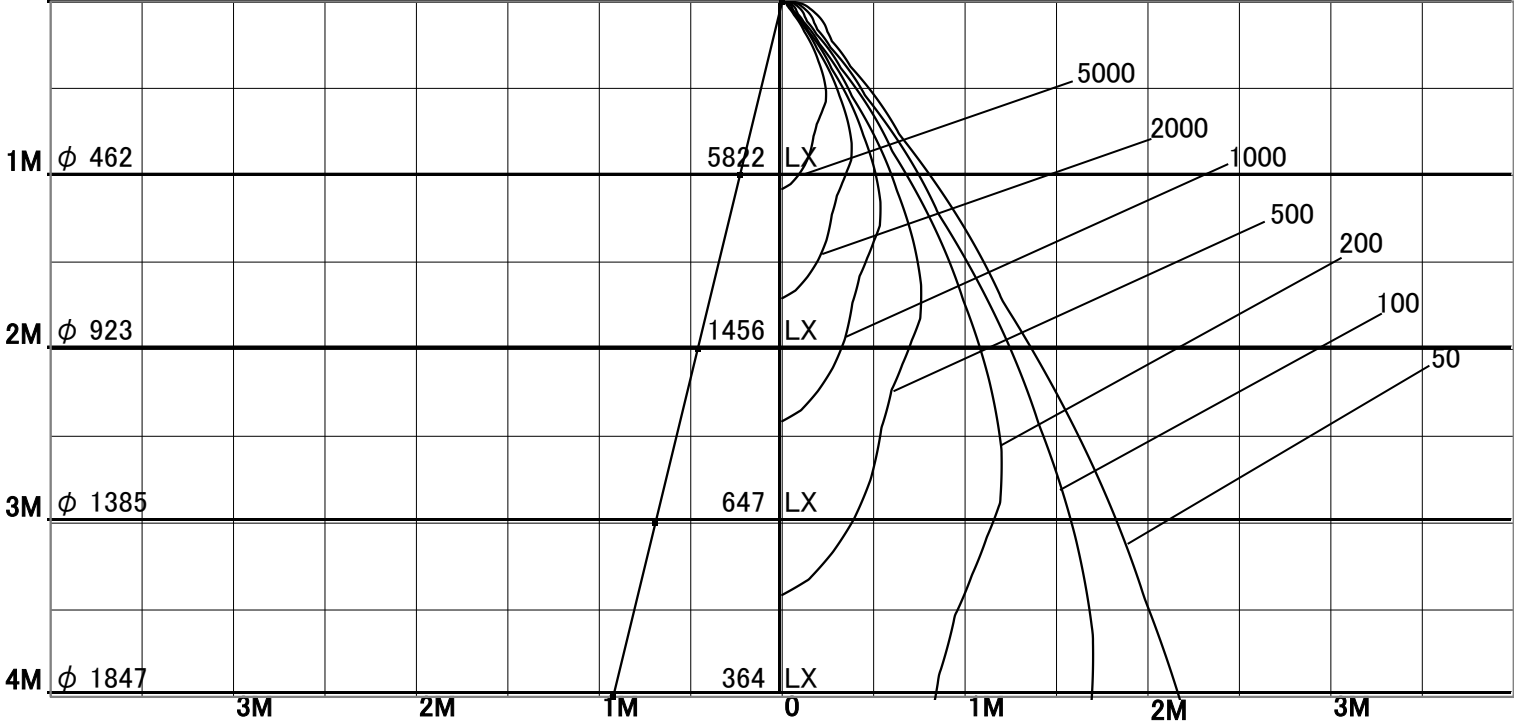

固有照明率表

天井	80%				70%				50%				30%				0%
壁	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
床	10%				10%				10%				10%				0%
0.60	86	80	77	74	85	80	76	74	84	79	76	74	83	79	76	74	73
0.80	91	85	82	79	90	85	81	79	88	84	81	79	87	83	80	78	77
1.00	95	90	87	84	94	89	86	84	92	88	86	83	91	87	85	83	82
1.25	98	93	90	88	97	93	90	88	95	92	89	87	93	91	88	87	85
1.50	100	96	93	91	99	95	93	91	97	94	92	90	95	93	91	89	88
2.00	103	100	98	96	102	99	97	96	100	98	96	95	98	97	95	94	92
2.50	105	103	101	100	104	102	100	99	102	100	99	98	100	99	98	97	95
3.00	106	104	103	102	105	104	102	101	103	102	101	100	101	101	100	99	97
4.00	107	106	105	104	106	105	104	104	104	104	103	102	103	102	101	101	99
5.00	108	107	106	106	107	106	106	105	105	104	104	104	103	103	102	102	100
7.00	109	108	108	108	108	107	107	107	106	106	105	105	104	104	104	104	101
10.00	109	109	109	109	108	108	108	108	106	106	106	106	104	104	104	104	102