



屋内照明器具特性

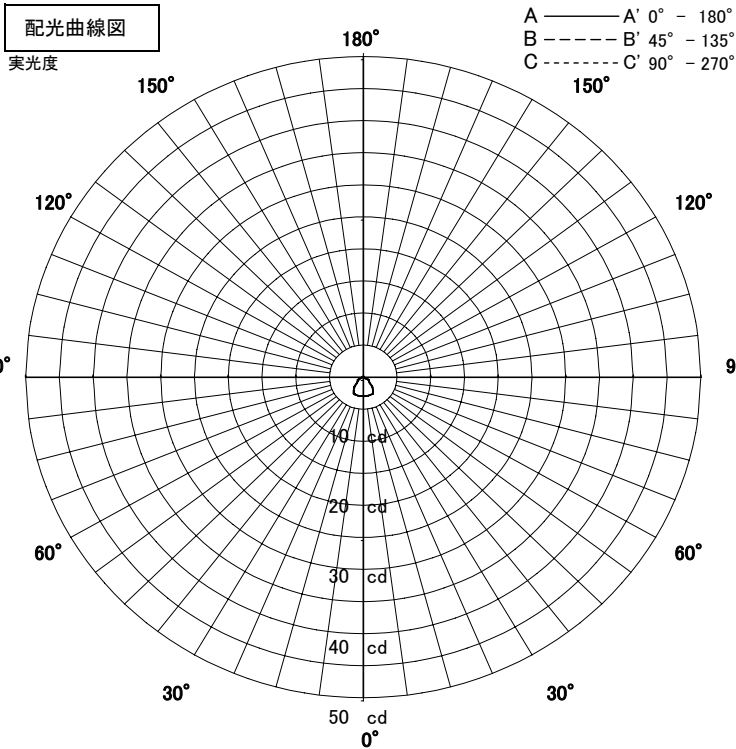

品名	DD-3304-L		
光源	LDT1L-H-E12		
実効光束 (器具光束)	7lm	効率	14.4lm/W




1/2照度角

直射水平面照度

単位:Lx

色温度	2800K	
演色評価指数	Ra70	
保守率	良	0.8
	中	0.6
	否	0.54

1/2照度角		
A-A'	69.0	Deg
C-C'	69.0	Deg
最大取付間隔		
A-A'	1.37	H
C-C'	1.37	H

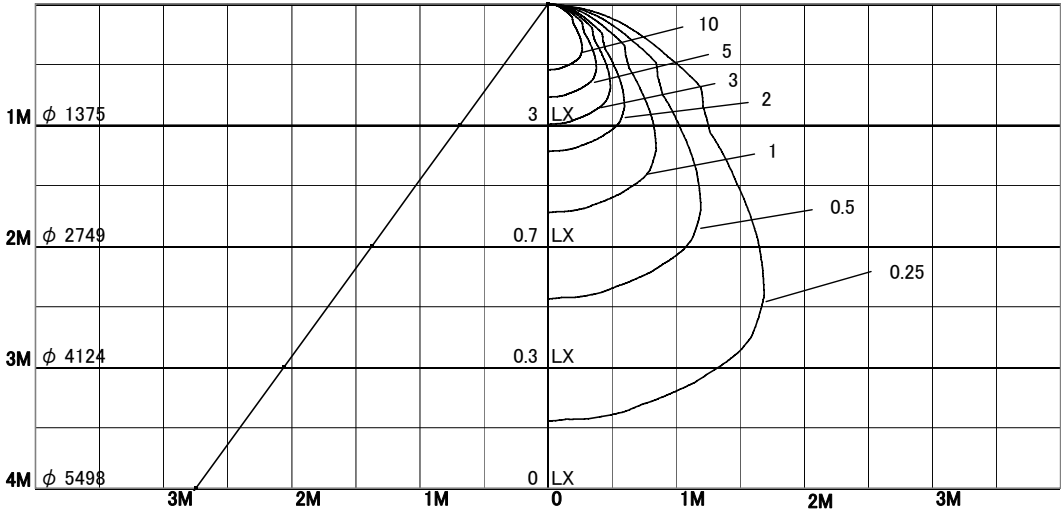

照 明 率 表																	
天井	80%				70%				50%				30%				0%
壁	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
床	10%				10%				10%				10%				0%
0.60	65	54	47	42	64	53	47	42	61	52	46	42	60	51	46	42	40
0.80	73	63	56	51	72	62	56	51	69	61	55	50	67	60	54	50	48
1.00	80	70	63	58	78	69	63	58	76	68	62	58	73	66	61	57	55
1.25	85	77	70	65	84	76	70	65	81	74	69	65	78	73	68	64	62
1.50	89	81	75	71	88	81	75	70	85	79	74	70	82	77	73	69	67
2.00	95	89	83	79	93	88	83	79	90	86	82	78	88	84	80	77	75
2.50	98	93	89	85	97	92	88	84	94	90	86	83	91	88	85	83	80
3.00	100	96	92	89	99	95	92	88	96	93	90	87	94	91	89	86	84
4.00	103	100	97	94	102	99	96	93	99	96	94	92	97	94	92	91	88
5.00	104	102	99	97	103	101	98	96	101	99	97	95	98	96	95	93	91
7.00	106	104	103	101	105	103	102	100	103	101	100	98	100	99	98	97	94
10.00	108	106	105	104	106	105	104	103	104	103	102	101	102	101	100	99	96