


屋内照明器具特性



品名	DD-3400		
光源	LED28.3W		
実効光束 (器具光束)	1212lm	エネルギー 効率	42.9lm/W

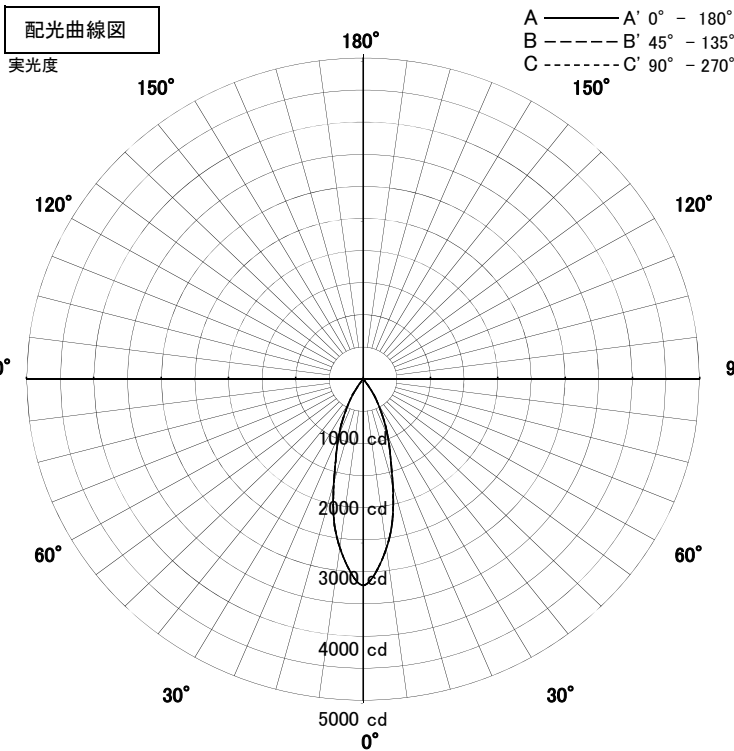


1/2照度角

直射水平面照度

単位:Lx

器具効率	57.4%	
色温度	2700K	
演色評価指数	Ra82	
保守率	良	0.67
	中	0.63
	否	0.56
1/2照度角		
A-A'	28.5	Deg
C-C'	28.5	Deg
最大取付間隔		
A-A'	0.51	H
C-C'	0.51	H

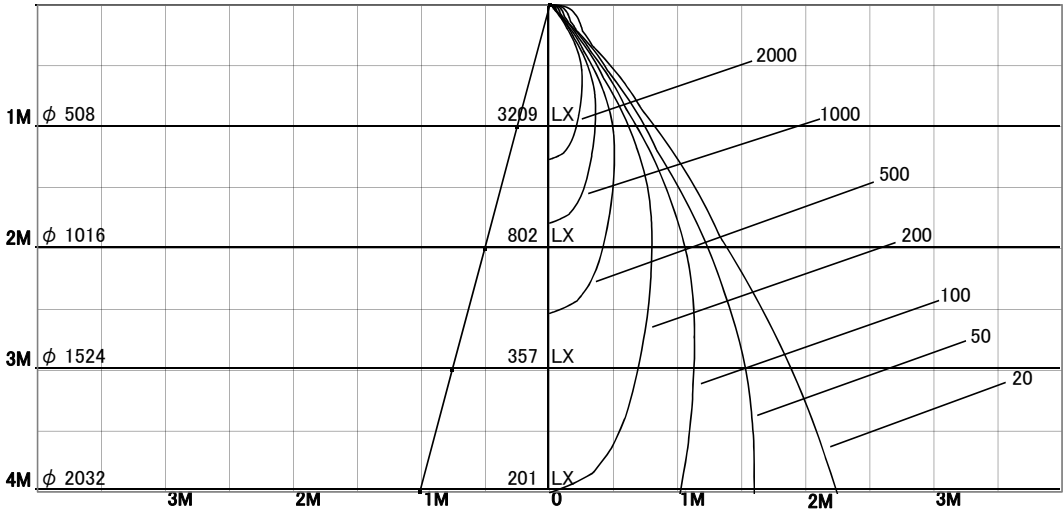


固有照明率表

天井	80%				70%				50%				30%				0%
壁	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
床	10%				10%				10%				10%				0%
0.60	87	82	78	76	87	81	78	75	86	81	78	75	84	80	77	75	74
0.80	92	87	83	80	91	86	83	80	90	85	82	80	88	85	82	80	79
1.00	96	91	88	85	95	91	88	85	94	90	87	85	92	89	87	85	83
1.25	99	95	92	89	98	94	92	89	96	93	91	89	95	92	90	88	87
1.50	101	98	95	92	100	97	94	92	98	96	93	91	97	94	92	91	89
2.00	104	102	100	98	103	101	99	97	102	100	98	96	100	98	97	96	94
2.50	106	104	103	101	105	104	102	101	103	102	101	100	102	101	100	99	97
3.00	108	106	105	104	107	105	104	103	105	104	103	102	103	102	101	101	99
4.00	109	108	107	106	108	107	106	105	106	105	105	104	104	104	103	103	101
5.00	110	109	108	108	109	108	107	107	107	106	106	105	105	104	104	104	102
7.00	110	110	110	110	109	109	109	109	107	107	107	107	106	105	105	105	103
10.00	111	111	111	111	110	110	110	110	108	108	108	108	106	106	106	106	103

屋内照明器具特性



品名	DD-3400		
光源	LED56.5W		
実効光束 (器具光束)	2610lm	エネルギー 効率	46.2lm/W

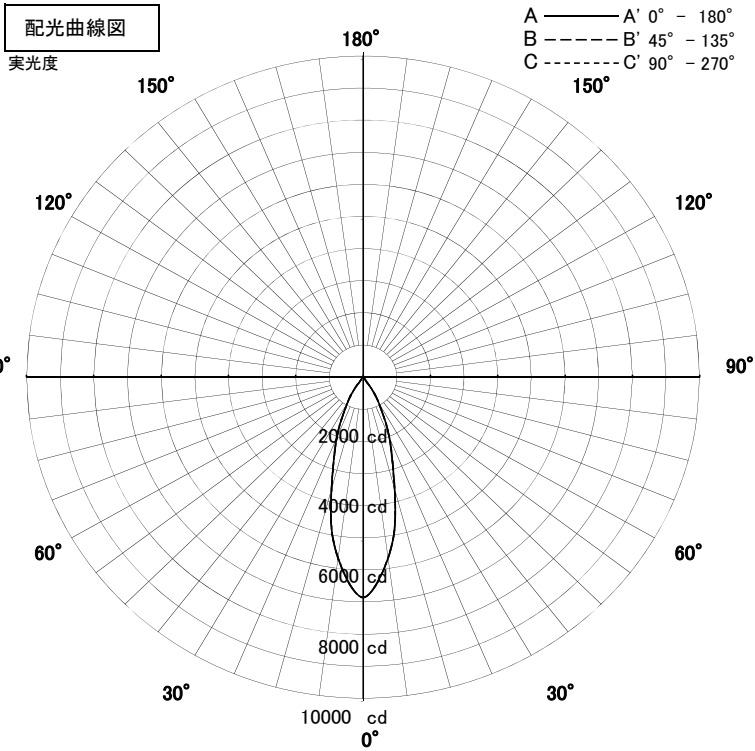


1/2照度角

直射水平面照度

単位:Lx

器具効率		56.5%
色温度		3850K
演色評価指数		Ra82
保守率	良	0.67
	中	0.63
	否	0.56
1/2照度角		
A—A'	28.5	Deg
C—C'	28.5	Deg
最大取付間隔		
A—A'	0.51	H
C—C'	0.51	H

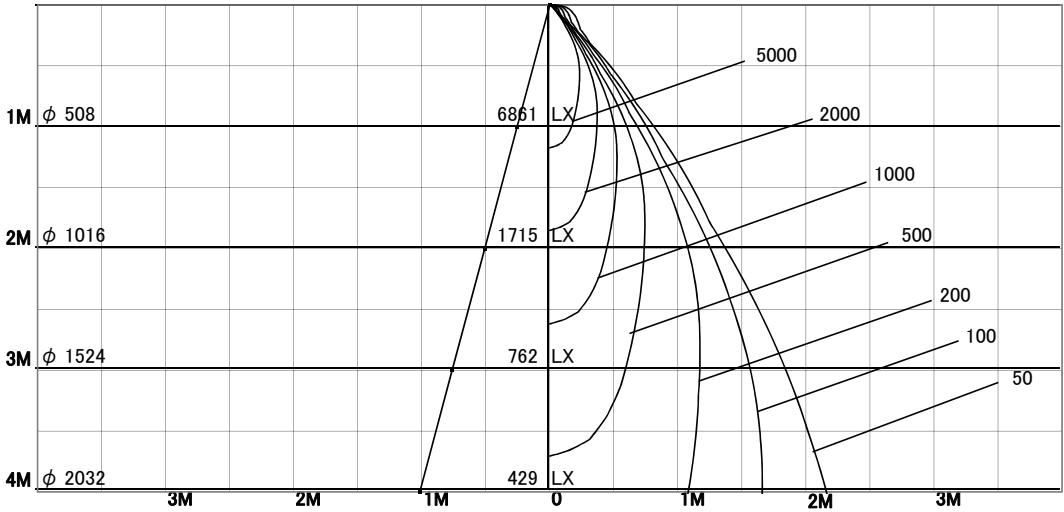


固有照明率表

天井	80%				70%				50%				30%				0%
壁	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
床	10%				10%				10%				10%				0%
0.60	87	82	78	75	87	81	78	75	85	81	78	75	84	80	77	75	74
0.80	92	87	83	80	91	86	83	80	90	85	82	80	88	85	82	80	79
1.00	96	91	88	85	95	91	88	85	94	90	87	85	92	89	86	84	83
1.25	99	95	92	89	98	94	91	89	96	93	91	89	95	92	90	88	87
1.50	101	98	95	92	100	97	94	92	98	96	93	91	97	94	92	91	89
2.00	104	102	99	98	103	101	99	97	101	99	98	96	100	98	97	95	94
2.50	106	104	103	101	105	103	102	101	103	102	101	100	102	100	99	99	97
3.00	108	106	105	104	107	105	104	103	105	104	103	102	103	102	101	101	99
4.00	109	108	107	106	108	107	106	105	106	105	105	104	104	104	103	103	100
5.00	109	109	108	108	108	108	107	107	107	106	106	105	105	104	104	104	101
7.00	110	110	110	109	109	109	109	109	107	107	107	107	105	105	105	105	103
10.00	111	111	111	111	110	110	110	110	108	108	108	108	106	106	106	106	103

屋内照明器具特性




品名	DD-3400		
光源	LED28.3W		
実効光束 (器具光束)	1422lm	エネルギー 効率	50.3lm/W

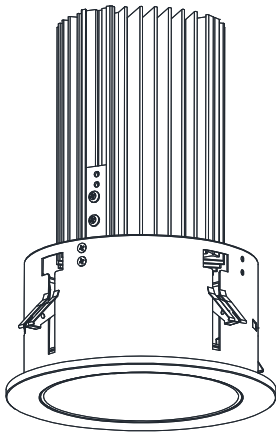

配光曲線図

実光度

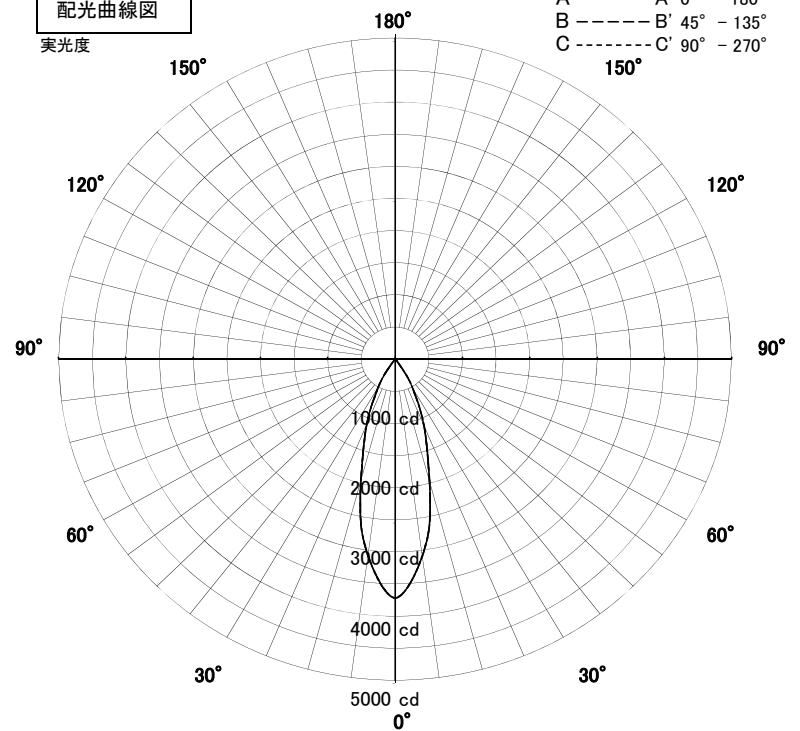


1/2照度角

直射水平面照度

単位: Lx

器具効率	56.7%	
色温度	5000K	
演色評価指数	Ra82	
保守率	良	0.67
	中	0.63
	否	0.56
1/2照度角		
A-A'	29.0	Deg
C-C'	29.0	Deg
最大取付間隔		
A-A'	0.52	H
C-C'	0.52	H

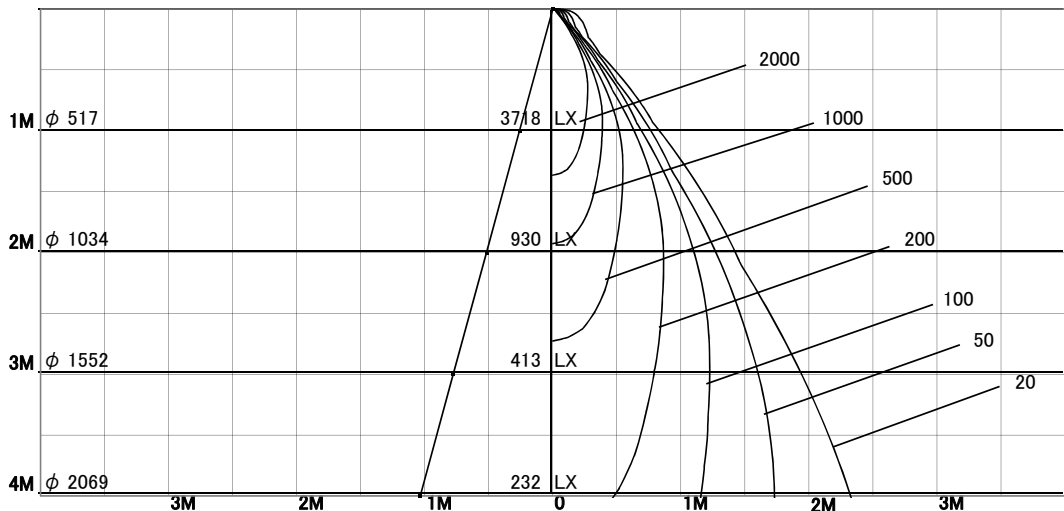

固有照明率表

天井	80%				70%				50%				30%				0%
壁	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
床	10%				10%				10%				10%				0%
0.60	87	82	78	75	87	81	78	75	85	81	77	75	84	80	77	75	74
0.80	92	87	83	80	91	86	83	80	90	85	82	80	88	85	82	80	78
1.00	96	91	88	85	95	91	88	85	94	90	87	85	92	89	86	84	83
1.25	99	95	92	89	98	94	91	89	96	93	91	89	95	92	90	88	87
1.50	101	97	95	92	100	97	94	92	98	95	93	91	97	94	92	91	89
2.00	104	102	99	98	103	101	99	97	101	99	98	96	100	98	97	95	94
2.50	106	104	103	101	105	103	102	101	103	102	101	99	102	100	99	98	97
3.00	108	106	105	104	107	105	104	103	105	104	103	102	103	102	101	101	99
4.00	109	108	107	106	108	107	106	105	106	105	104	104	104	103	103	103	100
5.00	109	109	108	108	108	108	107	107	106	106	106	105	105	104	104	104	101
7.00	110	110	110	109	109	109	109	109	107	107	107	107	105	105	105	105	103
10.00	111	111	111	111	110	110	110	110	108	108	108	108	106	106	106	106	103