


屋内照明器具特性



品名	DD-3401		
光源	LED28.3W		
実効光束 (器具光束)	1212lm	エネルギー 効率	42.9lm/W

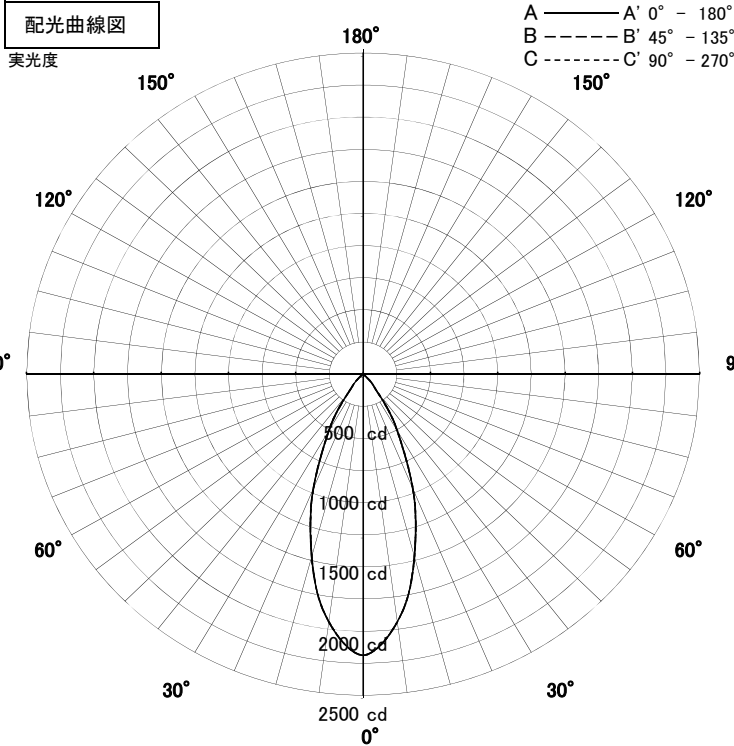


1/2照度角

直射水平面照度

単位:Lx

器具効率	57.5%	
色温度	2700K	
演色評価指数	Ra82	
保守率	良	0.67
	中	0.63
	否	0.56
1/2照度角		
A-A'	36.0	Deg
C-C'	36.0	Deg
最大取付間隔		
A-A'	0.65	H
C-C'	0.65	H

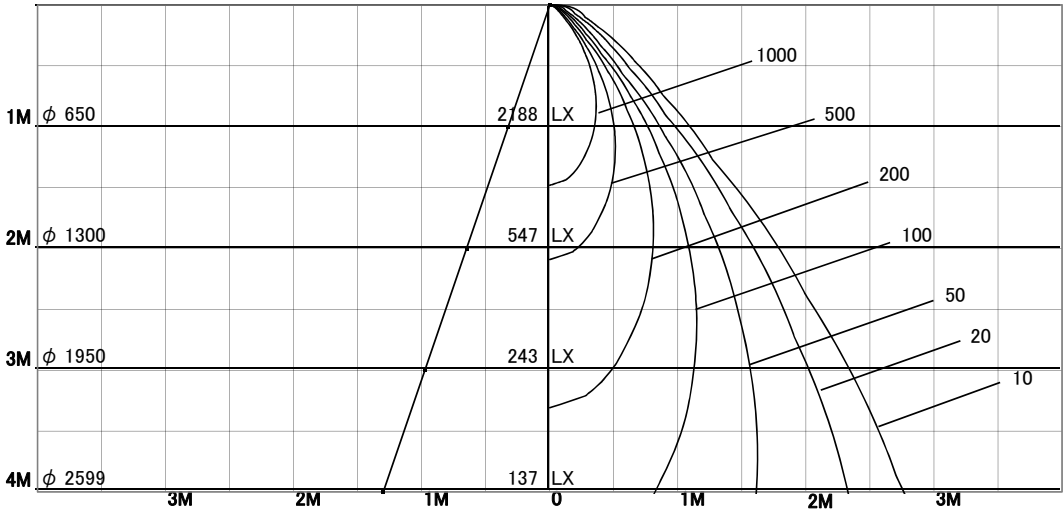


固有照明率表

天井	80%				70%				50%				30%				0%
壁	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
床	10%				10%				10%				10%				0%
0.60	84	78	74	71	84	78	74	71	82	77	74	71	81	77	73	71	70
0.80	90	84	80	77	89	83	80	77	87	82	79	77	86	82	79	76	75
1.00	94	89	85	82	93	88	85	82	91	87	84	82	90	86	84	81	80
1.25	97	93	89	87	96	92	89	86	94	91	88	86	93	90	87	85	84
1.50	99	95	92	90	98	95	92	90	97	93	91	89	95	92	90	88	87
2.00	103	100	97	96	102	99	97	95	100	98	96	94	98	96	95	93	92
2.50	105	103	101	99	104	102	100	99	102	100	99	98	100	99	98	97	95
3.00	106	104	103	102	105	104	102	101	103	102	101	100	101	100	100	99	97
4.00	107	106	105	104	106	105	104	104	104	104	103	102	103	102	101	101	99
5.00	108	107	106	106	107	106	106	105	105	105	104	103	103	103	102	102	100
7.00	109	109	108	108	108	108	107	107	106	106	105	105	104	104	104	103	101
10.00	109	109	109	109	108	108	108	108	106	106	106	106	104	104	104	104	102

屋内照明器具特性



品名	DD-3401		
光源	LED56.5W		
実効光束 (器具光束)	2605lm	エネルギー 効率	46.1lm/W

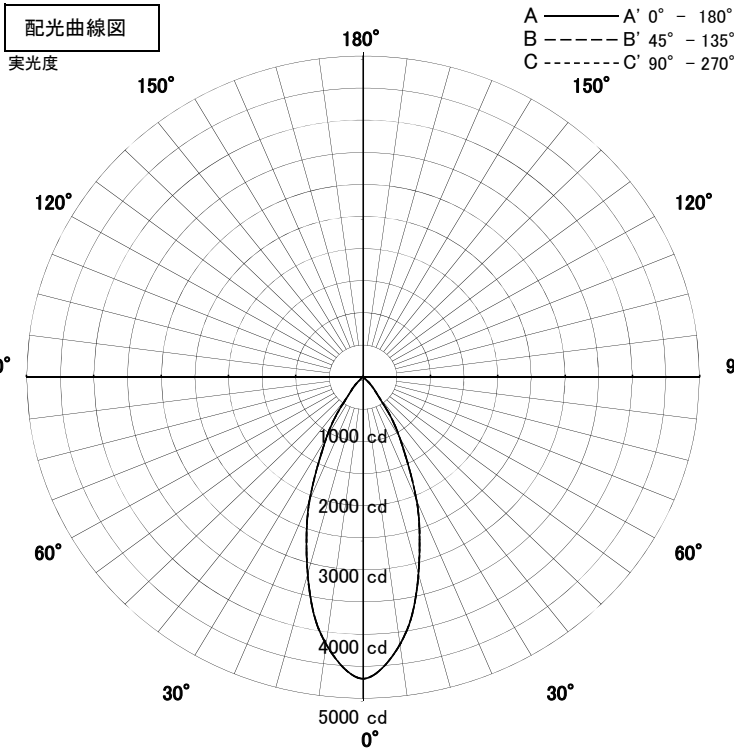


1/2照度角

直射水平面照度

単位:Lx

器具効率	56.4%	
色温度	3850K	
演色評価指数	Ra82	
保守率	良	0.67
	中	0.63
	否	0.56
1/2照度角		
A-A'	36.0	Deg
C-C'	36.0	Deg
最大取付間隔		
A-A'	0.65	H
C-C'	0.65	H

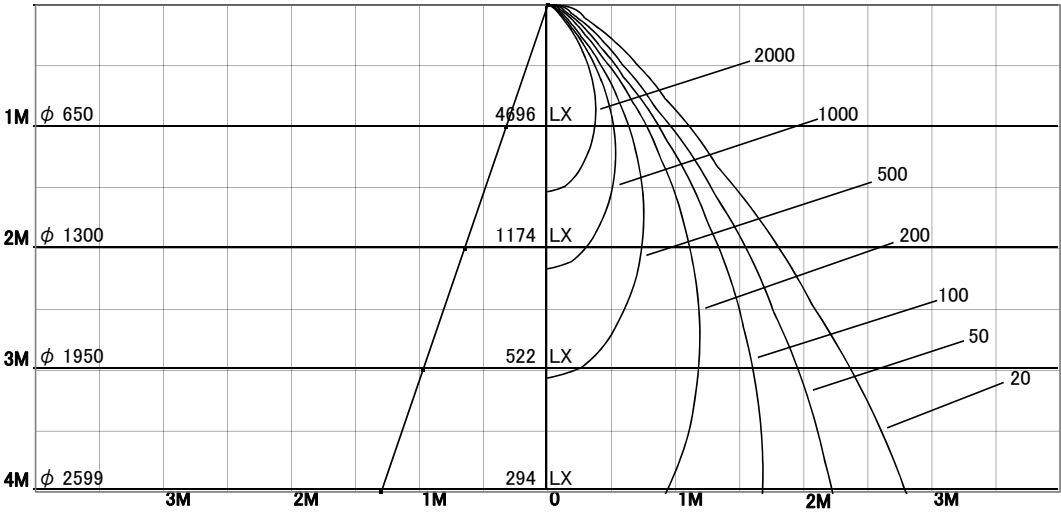


固有照明率表

天井	80%				70%				50%				30%				0%
壁	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
床	10%				10%				10%				10%				0%
0.60	84	78	74	71	84	78	74	71	82	77	74	71	81	77	73	71	70
0.80	90	84	80	77	89	83	80	77	87	82	79	77	86	82	79	76	75
1.00	94	89	85	82	93	88	85	82	91	87	84	82	90	86	84	81	80
1.25	97	93	89	87	96	92	89	87	94	91	88	86	93	90	87	85	84
1.50	99	96	92	90	98	95	92	90	97	94	91	89	95	92	90	88	87
2.00	103	100	98	96	102	99	97	95	100	98	96	94	98	96	95	93	92
2.50	105	103	101	99	104	102	100	99	102	100	99	98	100	99	98	97	95
3.00	106	104	103	102	105	104	102	101	103	102	101	100	102	101	100	99	97
4.00	107	106	105	104	106	105	104	104	104	104	103	102	103	102	101	101	99
5.00	108	107	107	106	107	106	106	105	105	105	104	103	103	103	102	102	100
7.00	109	109	108	108	108	108	107	107	106	106	105	105	104	104	104	103	101
10.00	109	109	109	109	108	108	108	108	106	106	106	106	104	104	104	104	102

屋内照明器具特性



品名	DD-3401		
光源	LED28.3W		
実効光束 (器具光束)	1419lm	エネルギー 効率	50.2lm/W

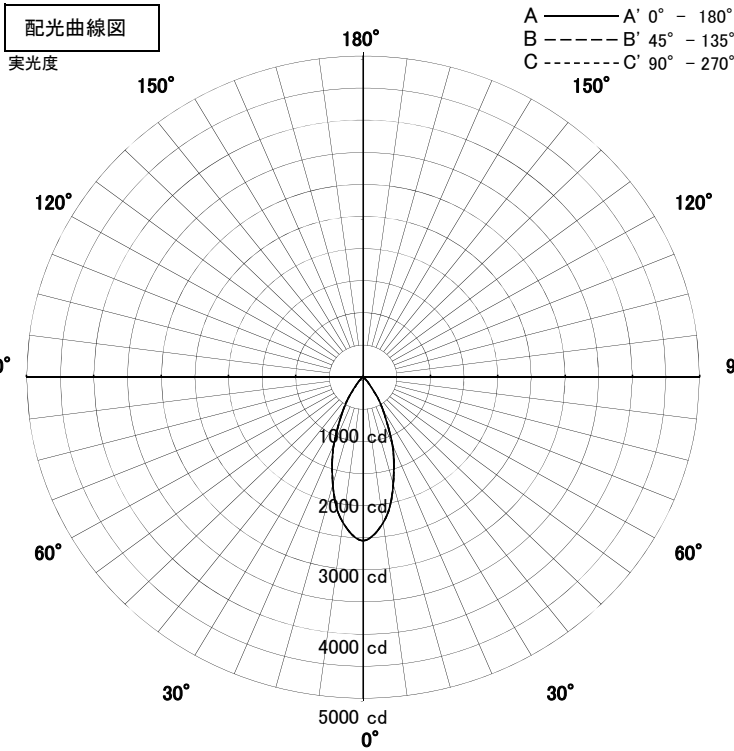


1/2照度角

直射水平面照度

単位:Lx

器具効率	56.5%	
色温度	5000K	
演色評価指数	Ra82	
保守率	良	0.67
	中	0.63
	否	0.56
1/2照度角		
A-A'	36.5	Deg
C-C'	36.5	Deg
最大取付間隔		
A-A'	0.66	H
C-C'	0.66	H

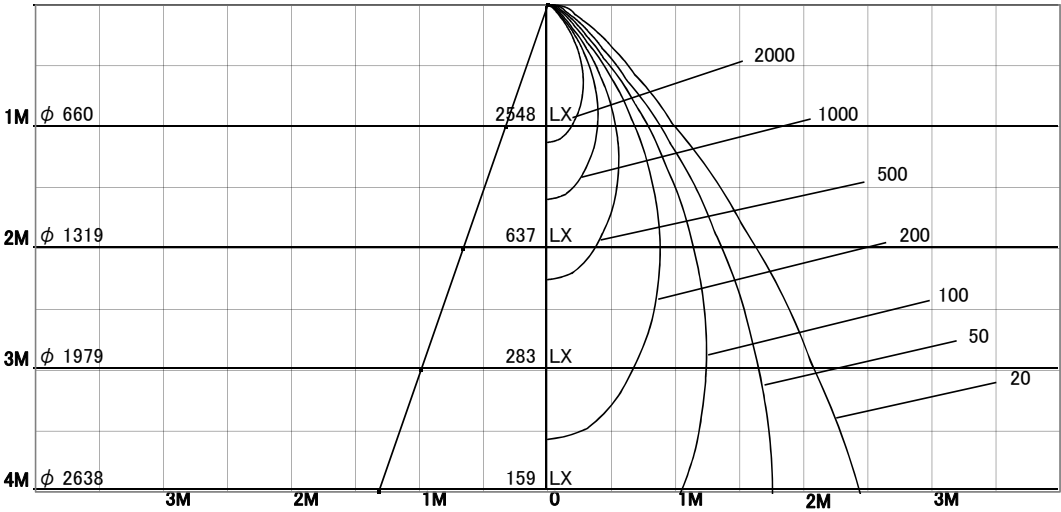

固有照明率表

天井	80%				70%				50%				30%				0%
壁	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	70%	50%	30%	10%	0%
床	10%				10%				10%				10%				0%
0.60	84	78	74	71	84	78	74	71	82	77	74	71	81	77	73	71	70
0.80	90	84	80	77	89	83	80	77	87	82	79	77	86	82	79	76	75
1.00	94	89	85	82	93	88	85	82	91	87	84	82	90	86	84	81	80
1.25	97	93	89	87	96	92	89	87	94	91	88	86	93	90	87	86	84
1.50	99	96	92	90	98	95	92	90	97	94	91	89	95	92	90	88	87
2.00	103	100	98	96	102	99	97	95	100	98	96	94	98	96	95	93	92
2.50	105	103	101	99	104	102	100	99	102	100	99	98	100	99	98	97	95
3.00	106	105	103	102	105	104	102	101	103	102	101	100	102	101	100	99	97
4.00	107	106	105	104	106	105	104	104	105	104	103	102	103	102	101	101	99
5.00	108	107	107	106	107	106	106	105	105	105	104	103	103	103	102	102	100
7.00	109	109	108	108	108	108	107	107	106	106	105	105	104	104	104	103	101
10.00	110	109	109	109	108	108	108	108	106	106	106	106	104	104	104	104	102