



スポットライト 特性



| | | | |
|----------------|----------------------|----|--------|
| 品名 | DN-3442 | | |
| 光源 | LDR9L-M-E11D/27/7/20 | | |
| 実効光束 (器具光束) | 630lm | 効率 | 70lm/W |

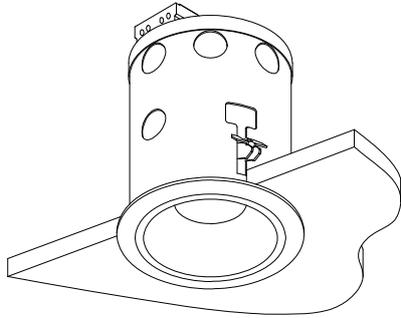

配光曲線図
cd/1000lm

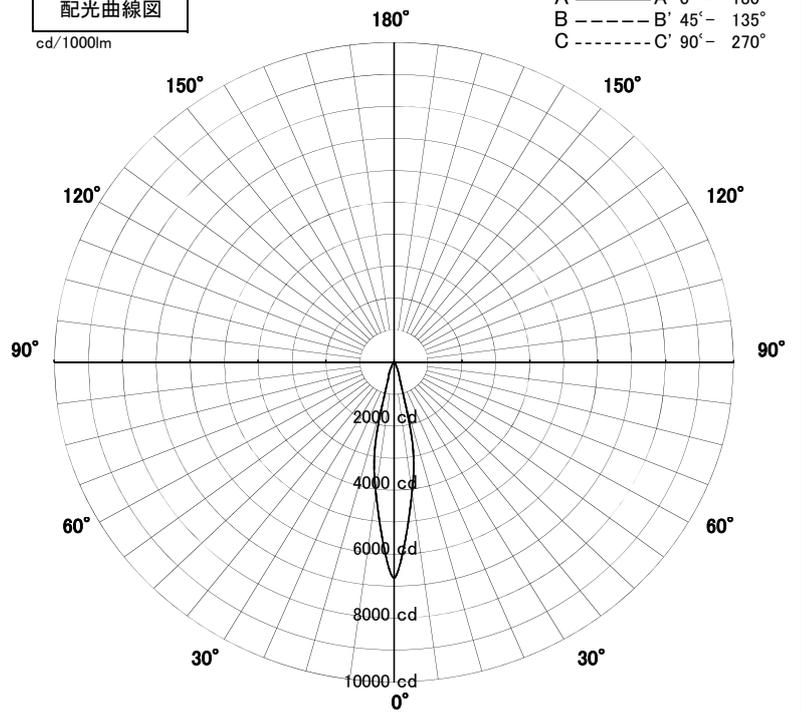


| | | |
|--------|-------|------|
| 色温度 | 2700K | |
| 演色評価指数 | Ra85 | |
| 保守率 | 良 | 0.8 |
| | 中 | 0.6 |
| | 否 | 0.54 |

| | | |
|---------|------|---|
| 1/2ビーム角 | | |
| A-A' | 20.0 | 度 |
| C-C' | 20.0 | 度 |

A-A' Section

1/2ビーム角


C-C' Section

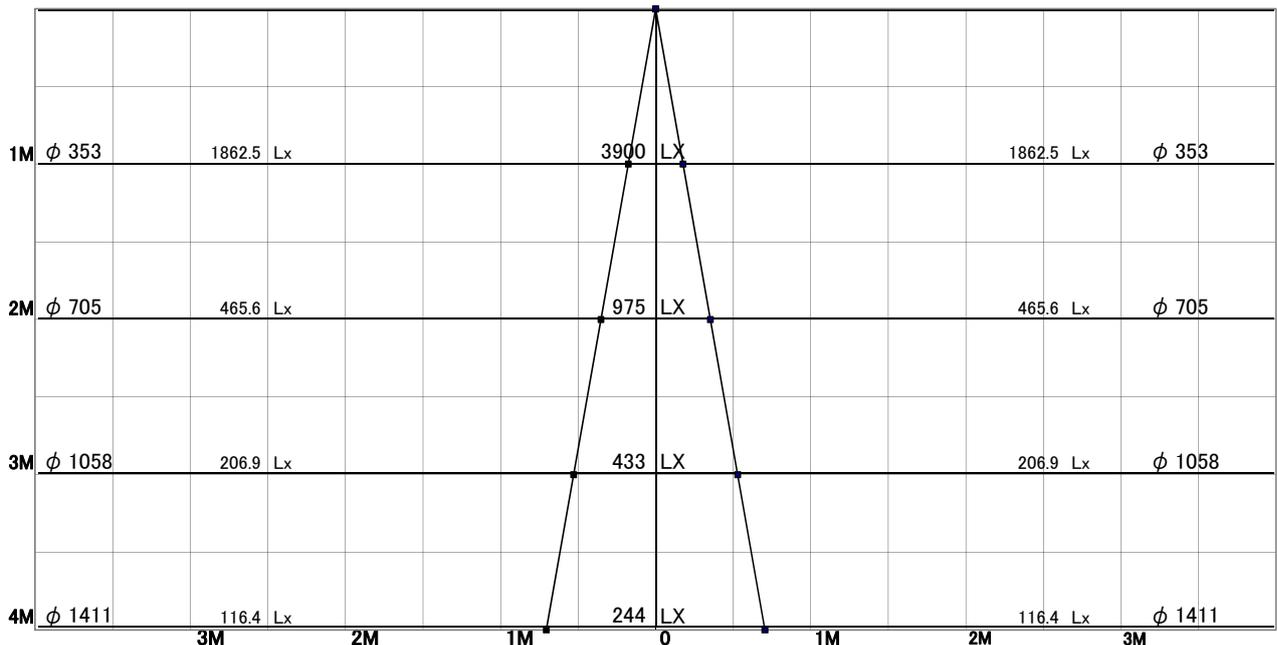


スポットライト 特性



| | | | |
|----------------|----------------------|----|--------|
| 品名 | DN-3442 | | |
| 光源 | LDR9L-W-E11D/27/7/32 | | |
| 実効光束 (器具光束) | 630lm | 効率 | 70lm/W |

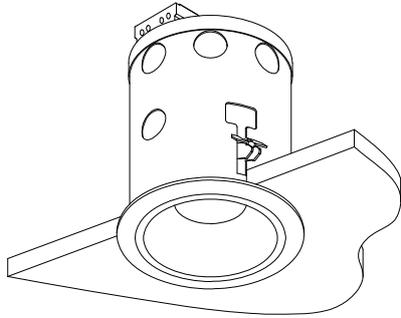

配光曲線図
cd/1000lm

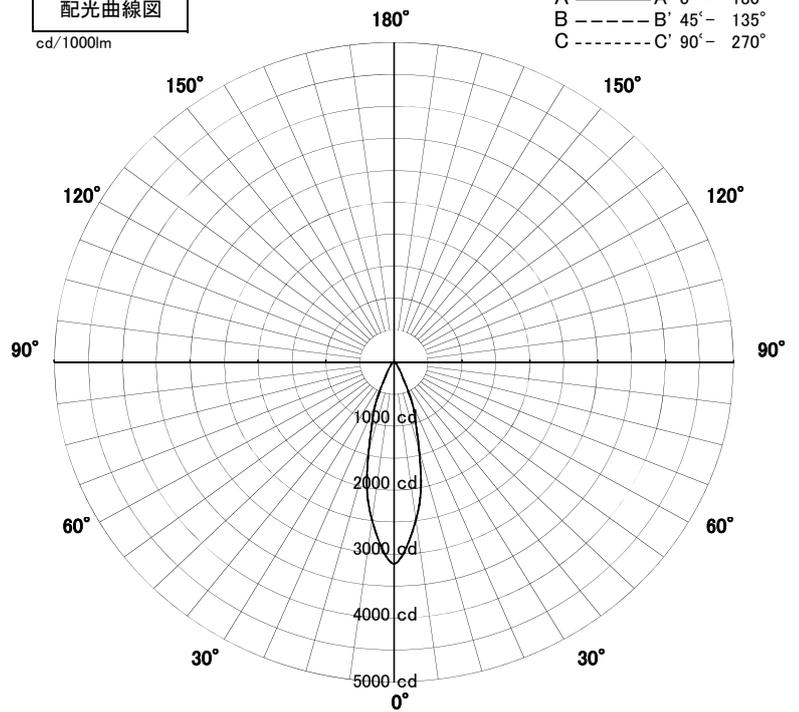

| | | |
|--------|-------|------|
| 色温度 | 2700K | |
| 演色評価指数 | Ra85 | |
| 保守率 | 良 | 0.67 |
| | 中 | 0.63 |
| | 否 | 0.56 |

| | | |
|---------|------|---|
| 1/2ビーム角 | | |
| A-A' | 31.0 | 度 |
| C-C' | 31.0 | 度 |

A-A' Section

1/2ビーム角

C-C' Section

